


drylin® R liner JUM-02

JUM-02-10

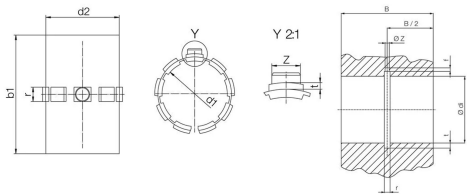

drylin® R liner JUM-02

- Material: iglidur® J for all shaft surfaces in indoor and outdoor use
- Version: Enclosed, short design

r	3 mm
Ø z	2.5 mm
Ø d1	10 mm
t	0.8 mm
Ø d2	12 mm
b1	25 mm
B	26 mm
Ø di	12 mm

Product description

Introducing the drylin R liner JUM-02, designed for versatility in both indoor and outdoor applications. Made from durable iglidur J material, this enclosed, short design ensures reliable performance across various shaft surfaces. Perfect for those seeking a robust and efficient solution, the drylin R liner JUM-02 combines quality and functionality in one sleek package.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C

Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.070mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0,05 mm
t1 tolerance	+0,1 mm
f1 tolerance	+0,5 mm



Dimensions

Ø d1	10 mm
Ø d2	12 mm
b1	25 mm
r	3 mm
t	0.8 mm
Ø z	2.5 mm
Ø di	12 mm
B	26 mm
t1	1 mm
f1	1 mm
Ø Z1	2.6 mm

Certificates and standards



Additional information and diagrams

