


drylin® R liner JUM-12

JUM-12-10

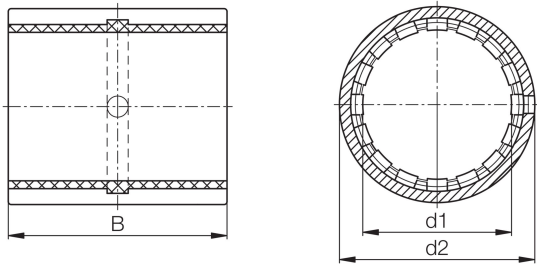

drylin® R liner JUM-12

- Open, anodized aluminum adapter, precise

Part number	JUM-12-10
Ø d1	10 mm
Ø d2	17 mm
B	26 mm

Product description

Introducing the drylin R liner JUM-12, a precision-engineered open adapter made from anodized aluminum. This durable and lightweight product ensures smooth operation and reliability for your projects. Its sleek design not only enhances functionality but also adds a modern touch to your setup. Experience the perfect combination of quality and performance with the drylin R liner JUM-12, designed to meet your needs effortlessly.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Physical properties

Max. long-term application temperature	90 °C
Lower application temperature	-50 °C

Manufacturing and installation tolerances

d1 tolerance	+0.000 +0.040mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0,05 mm
t1 tolerance	+0,1 mm
f1 tolerance	+0,5 mm



Dimensions

Ø d1	10 mm
Ø d2	17 mm
b1	29 mm
r	3 mm
t	0.8 mm
Ø z	2.5 mm
Ø di	12 mm
B	26 mm
t1	1 mm
Ø Z1	2.6 mm

Certificates and standards



Additional information and diagrams

