

Han 10B connector housing (pin) on Han 10B
connector housing (socket), single locking lever,
straight at both ends, PVC 7.5xd

MAT90489377



**Han 10B connector housing (pin) on Han 10B
connector housing (socket), single locking
lever, straight at both ends, PVC 7.5xd**

- For medium-duty applications
- PVC outer jacket
- Flame retardant
- Silicone-free
- Not oil-resistant
- CFRIP®
- Guarantee up to 4 years

Product description

Introducing the Han 10B Connector Housing, designed for medium duty applications. This connector features a single locking lever and a straight design at both ends, ensuring reliability in various settings. With a durable PVC outer jacket, it is flame retardant and silicone-free, perfect for indoor use. Ideal for wood and stone processing, packaging, and handling devices, this connector is your go-to solution for efficient connectivity without oil influence. Experience quality and versatility with Han 10B.

Connectors

Connector A	Socket M25 insert 10+PE straight Cable entry
Connector B	Connector M25 insert 10+PE straight Cable entry

General properties

Number of cores and conductor nominal cross-section	12G1.5
Outer diameter (d) max. mm	13 mm
Weight per km	288 kg/km
Copper index kg/km	179 kg/km




Electricity attributes

	Nominal voltage	300/500V
	UL Voltage Rating	300 V
	Test voltage	2000V (according to DIN EN 50395)
	Maximum conductor resistance at 20°C [Ω /km]	13.3000

Cable structure

	Conductor	Finely stranded conductor consisting of bare copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores wound in bundles are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
	Conductor colours	cores black with white numbers, one core green-yellow.
	Core group 1 core structure	12G1.5
	Outer jacket	Low-adhesion PVC mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-4-1).
	Outer jacket colour	Silver grey (comparable to RAL 7001)
	CFRIP®	Strip cables faster: a tear strip is moulded into the outer jacket

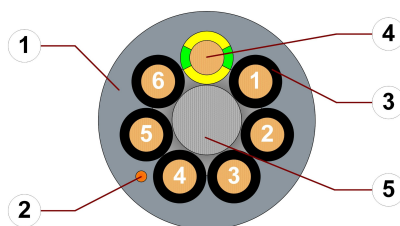

1. Outer jacket: pressure-extruded, gusset-filling PVC mixture
2. CFRIP: tear strip for faster stripping
3. Core insulation: mechanically high-quality TPE mixture
4. Conductor: finely stranded wires of bare copper wires
5. Strain relief: high tensile strength centre element
6. 12 cores or more: bundles with optimised pitch length and direction



Dynamic properties

	Min. bend radius, e-chain (factor)	7.5 x d
	Min. bend radius, e-chain	97.5 mm
	Min. bend radius, flexible (factor)	6 x d
	Min. bend radius, fixed (factor)	4 x d
	Temperature e-chain®	+5°C up to +70°C
	Temperature, flexible	-5°C to +70°C (according to DIN EN 60811-504)
	Temperature, fixed	-15°C to +70°C (according to DIN EN 50305)
	v max. unsupported (speed)	3 m/s
	v max. gliding (speed)	2 m/s
	a max. (acceleration)	20 m/s ²
	travel length	Class 4
	torsion	Torsion ±90°, with 1m cable length, Class 2



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	5 million		7.5 million		10 million	
Temperature,	< 10m	≥ 10m	< 10m	≥ 10m	< 10m	≥ 10m
from/to [°C]	R min. [Factorxd]		R min. [Factorxd]		R min. [Factorxd]	
+5 / +15	10	12.5	11	13.5	12	14.5
+15 / +60	7.5	10	8.5	11	9.5	12
+60 / +70	10	12.5	11	13.5	12	14.5

* Higher number of double strokes possible - use the service life calculation function on this page.

Properties and approvals



UV resistance

none

Oil resistance

No oil resistance



Flame-retardant

According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame



Silicone-free

Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)



UL verified

Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"



UL/CSA AWM

Style 10493 and 20200, 300 V, 60 °C



NFPA

According to NFPA 79-2018, chapter 12.9



REACH

In accordance with Regulation (EC) No. 1907/2006 (REACH)



Lead-free

According to 2011/65/EU (RoHS-II/RoHS-III)



Cleanroom

According to ISO Class 1, material/cable tested by IPA according to DIN EN ISO standard 14644-1



CE

According to 2014/35/EU



Certificates and standards

