

Han 16B connector housing (pin) on Han 16B
connector housing (socket), double locking lever,
straight at both ends, PUR 6.8xd

MAT90489428



**Han 16B connector housing (pin) on Han 16B
connector housing (socket), double locking
lever, straight at both ends, PUR 6.8xd**

- For torsion applications
- DNV-certified
- PUR outer jacket
- Coolant-resistant
- Notch-resistant
- Hydrolysis and microbe-resistant
- Flame retardant
- Halogen-free
- Silicone-free
- UV-resistant
- PVC-free
- Oil-resistant (according to DIN EN 50363-10-2)
- Guarantee up to 4 years

Product description

Introducing the Han 16B Connector Housing, designed for heavy-duty applications. This robust connector features a double locking lever and straight ends, ensuring secure connections. Made with a PUR outer jacket, it offers exceptional resistance to oil, UV radiation, and harsh conditions. Ideal for machining, storage, and refrigeration sectors, this housing is also flame retardant, halogen-free, and silicone-free. Experience reliability and durability with the Han 16B Connector Housing, perfect for both indoor and outdoor use.

Connectors

Connector A	Socket M32 insert 16+PE straight Cable entry
Connector B	Connector M32 insert 16+PE straight Cable entry

General properties

Number of cores and conductor nominal cross-section	18G1.5
Outer diameter (d) max. mm	17 mm
Weight per km	405 kg/km
Copper index kg/km	268 kg/km




Electricity attributes

	Nominal voltage	300/500V
	UL Voltage Rating	1000 V
	Test voltage	2000V (according to DIN EN 50395)
	Maximum conductor resistance at 20°C [$\mu\Omega$ /km]	13.3000

Cable structure

	Conductor	Finely stranded conductor consisting of bare copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores wound in bundles are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
	Conductor colours	cores black with white numbers, one core green-yellow.
	Core group 1 core structure	18G1.5
	Inner jacket	TPE mixture adapted to suit the requirements in e-chains®.
	Outer jacket	Low-adhesion, halogen-free, highly abrasion-resistant PUR mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-10-2).
	Outer jacket colour	Window grey (comparable to RAL 7040)

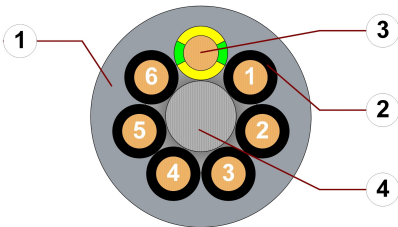

- 1. Outer jacket: pressure extruded, gusset-filling PUR mixture
- 2. Core insulation: mechanically high-quality TPE mixture
- 3. Conductor: finely stranded wires of bare copper wires
- 4. Strain relief: high tensile strength centre element
- 5. 12 cores or more: Bundles with optimised pitch length and direction



Properties and approvals

	UV resistance	Medium
Oil resistance		Oil-resistant (according to DIN EN 50363-10-2), Class 3
Offshore		MUD-resistant according to NEK 606 - status 2018
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
Halogen-free		According to DIN EN 60754
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 11323 and 21223, 1000 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	DNV	Type approval certificate TAE00003X1
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1, material/cable tested by IPA according to DIN EN ISO standard 14644-1
DESINA		According to VDW, DESINA standardisation
	CE	According to 2014/35/EU



Dynamic properties

	Min. bend radius, e-chain (factor)	6.8 x d
	Min. bend radius, e-chain	115.6 mm
	Min. bend radius, flexible (factor)	5 x d
	Min. bend radius, fixed (factor)	4 x d
	Temperature e-chain®	-25°C up to +80°C
	Temperature, flexible	-40°C to +80°C (according to DIN EN 60811-504)
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	10 m/s
	v max. gliding (speed)	5 m/s
	a max. (acceleration)	80 m/s ²
	travel length	Class 5
	torsion	Torsion ±180°, with 1m cable length, Class 3



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions
Further information: [chainflex® guarantee](#)

Double strokes*	5 million		7.5 million		10 million	
Temperature,	10m	10m	10m	10m	10m	10m
from/to [°C]	R min. [Factor x d]		R min. [Factor x d]		R min. [Factor x d]	
-25 / -5	8.5	10	9.5	11	10.5	12
+15 / +70	6.8	7.5	7.5	8.5	8.5	9.5
+70 / +80	8.5	10	9.5	11	10.5	12

* Higher number of double strokes possible - use the service life calculation function on this page.
Torsion application

Guaranteed service life for this series according to guarantee conditions
Further information: [chainflex® guarantee](#)

Cycles*			5 million	7.5 million	10 million
Temperature,	v max. [°/s]	a max. [°/s²]	Torsion max.	R min. [Factor x d]	R min. [Factor x d]
from/to [°C]	twisted	twisted	[°/m]	[°/m]	[°/m]
-25 / -15			±150	±90	±30
-15 / +70	180	60	±180	±120	±60
+70 / +80			±150	±90	±30

* Higher number of cycles possible - please ask for your individual calculation.

Certificates and standards

