

Han 24B connector housing (pin) on Han 24B
connector housing (socket), double locking lever,
straight at both ends, PUR 6.8xd

MAT90489460



**Han 24B connector housing (pin) on Han 24B
connector housing (socket), double locking
lever, straight at both ends, PUR 6.8xd**

- For torsion applications
- DNV-certified
- PUR outer jacket
- Coolant-resistant
- Notch-resistant
- Hydrolysis and microbe-resistant
- Flame retardant
- Halogen-free
- Silicone-free
- UV-resistant
- PVC-free
- Oil-resistant (according to DIN EN 50363-10-2)
- Guarantee up to 4 years

Product description

Introducing the Han 24B Connector Housing, designed for heavy-duty applications. This robust connector features a double locking lever and a straight design at both ends, ensuring secure connections. Made from PUR, it offers exceptional resistance to oil, UV radiation, and harsh environments, making it ideal for both indoor and outdoor use. With its flame-retardant, halogen-free, and silicone-free properties, this connector is perfect for machining, packaging, and refrigeration sectors. Choose reliability with Han 24B.

Connectors

Connector A	Socket M32 insert 24+PE straight Cable entry
Connector B	Connector M32 insert 24+PE straight Cable entry

General properties

Number of cores and conductor nominal cross-section	25G1.5
Outer diameter (d) max. mm	19.5 mm
Weight per km	564 kg/km
Copper index kg/km	297 kg/km




Electricity attributes

	Nominal voltage	300/500V
	UL Voltage Rating	1000 V
	Test voltage	2000V (according to DIN EN 50395)
	Maximum conductor resistance at 20°C [$\mu\Omega$ /km]	13.3000

Cable structure

	Conductor	Finely stranded conductor consisting of bare copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores wound in bundles are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
	Conductor colours	cores black with white numbers, one core green-yellow.
	Core group 1 core structure	25G1.5
	Inner jacket	TPE mixture adapted to suit the requirements in e-chains®.
	Outer jacket	Low-adhesion, halogen-free, highly abrasion-resistant PUR mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-10-2).
	Outer jacket colour	Window grey (comparable to RAL 7040)

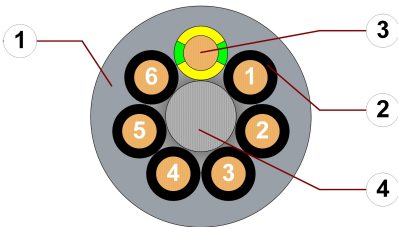

- 1. Outer jacket: pressure-extruded, gusset-filling PUR mixture
- 2. Core insulation: mechanically high-quality TPE mixture
- 3. Conductor: finely stranded wires of bare copper wires
- 4. Strain relief: high tensile strength centre element
- 5. 12 cores or more: bundles with optimised pitch length and direction



Dynamic properties

	Min. bend radius, e-chain (factor)	6.8 x d
	Min. bend radius, e-chain	132.6 mm
	Min. bend radius, flexible (factor)	5 x d
	Min. bend radius, fixed (factor)	4 x d
	Temperature e-chain®	-25°C up to +80°C
	Temperature, flexible	-40°C to +80°C (according to DIN EN 60811-504)
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	10 m/s
	v max. gliding (speed)	5 m/s
	a max. (acceleration)	80 m/s ²
	travel length	Class 5
	torsion	Torsion ±180°, with 1m cable length, Class 3



chainflex® Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	5 million		7.5 million		10 million	
Temperature,	< 10 m	≥ 10m	< 10 m	≥ 10m	< 10 m	≥ 10m
from/to [°C]	R min. [Factor x d]		R min. [Factor x d]		R min. [Factor x d]	
-25/-5	8.5	10	9.5	11	10.5	12
+15/+70	6.8	7.5	7.5	8.5	8.5	9.5
+70 / +80	8.5	10	9.5	11	10.5	12

* Higher number of double strokes possible - use the service life calculation function on this page.

Torsion application

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® Guarantee](#)

Cycles*			5 million	7.5 million	10 million
Temperature,	v max. [°/s]	a max. [°/s²]	Torsion max.	R min. [Factor x d]	R min. [Factor x d]
from/to [°C]	twisted	twisted	[°/m]	[°/m]	[°/m]
-25 / -15			±150	±90	±30
-15 / +70	180	60	±180	±120	±60
+70 / +80			±150	±90	±30

* Higher number of cycles possible - please ask for your individual calculation.



Properties and approvals

	UV resistance	Medium
Oil resistance		Oil-resistant (according to DIN EN 50363-10-2), Class 3
Offshore		MUD-resistant according to NEK 606 - status 2018
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
Halogen-free		According to DIN EN 60754
	UL verified	Certificate no. V293650: "igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 11323 and 21223, 1000 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	DNV	Type approval certificate TAE00003X1
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1, material/cable tested by IPA according to DIN EN ISO standard 14644-1
DESINA		According to VDW, DESINA standardisation
	CE	According to 2014/35/EU

Certificates and standards

