

readycable® signal cable suitable for Fanuc

LX660-4077-T302, basic cable PUR 10xd

MAT9300302



readycable® signal cable suitable for Fanuc

LX660-4077-T302, basic cable PUR 10xd

- For medium-duty applications
- PUR outer jacket
- Oil-resistant (according to DIN EN 50363-10-2)
- Halogen-free
- Silicone-free
- Flame retardant
- Offshore
- Coolant-resistant
- Hydrolysis and microbe-resistant
- Overall shield
- Notch-resistant
- PVC-free
- Guarantee up to 4 years

Product description

Introducing the readycable® signal cable, designed specifically for Fanuc LX660-4077-T302. This versatile cable features a durable PUR outer jacket, making it suitable for medium-duty applications. Its oil-resistant and flame-retardant properties ensure reliability in various environments, including indoor and outdoor settings. With hydrolysis and microbe resistance, this cable is perfect for processing and machine tools. Enjoy peace of mind with a notch-resistant, halogen-free, and PVC-free design. Ideal for gliding applications up to 10m.

Manufacturer attributes

Manufacturer Part No	LX660-4077-T302
Cable type	Basic cable

Connectors

Connector A	M23 coupling, pin, 12-pin
Connector B	Plug-in connector, socket, straight, 10-pin



General properties

Number of cores and conductor nominal cross-section	((4x0.25)+3x(2x0.25+2x0.5))C
Outer diameter (d) max. mm	9.5 mm
Weight per km	117 kg/km
Copper index kg/km	80 kg/km


Electricity attributes

	Nominal voltage	50V
UL Voltage Rating		300 V
	Test voltage	500V



Cable structure

	Conductor	Very finely stranded special conductors of particularly bending resistant design made of tinned copper wires.
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	According to measuring system specification
	Conductor colours	according to measuring system specification
Core group 1 core structure		(4x0.25)
Core group 1 colour code		white/brown/grey/black
Core group 2 core structure		3x2x0.25
	Element shield	Extremely bend-resistant, tinned copper shielding. Cover approx. 90% optical
Element jacket		TPE mixture on pair shielding adapted to suit the requirements in e-chains®.
	Overall shield	Bend-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical
	Outer jacket	Low-adhesion, halogen-free, highly abrasion-resistant PUR mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-10-2).
	Outer jacket colour	Yellow-green (comparable to RAL 6018)

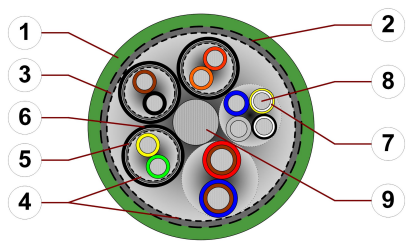

1. Outer jacket: pressure extruded PUR mixture
2. Banding: plastic fleece
3. Overall shield: extremely flexible braiding made of tinned copper wires
4. Banding: plastic foil
5. Element shield: extremely flexible tinned copper wire
6. Element jacket: mechanically high-quality TPE mixture
7. Core insulation: mechanically high-quality TPE mixture
8. Conductor: very finely stranded special conductors of a particularly bend-resistant design, made of tinned copper wires.
9. Strain relief: high tensile strength centre element



Dynamic properties

	Min. bend radius, e-chain (factor)	10 x d
	Min. bend radius, e-chain	95 mm
	Min. bend radius, flexible (factor)	8 x d
	Min. bend radius, fixed (factor)	5 x d
	Temperature e-chain®	-25°C up to +80°C
	Temperature, flexible	-40°C to +80°C (according to DIN EN 60811-504)
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	5 m/s
	v max. gliding (speed)	3 m/s
	a max. (acceleration)	30 m/s ²
	travel length	Class 2
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	5 million	7.5 million	10 million
Temperature,	R min.	R min.	R min.
from/to [°C]	[Factor x d]	[Factor x d]	[Factor x d]
-25 / -15	12.5	13.5	14.5
-15 / +70	10	11	12
+70 / +80	12.5	13.5	14.5

* Higher number of double strokes possible - use the service life calculation function on this page.



Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (according to DIN EN 50363-10-2), Class 3
	Offshore	MUD-resistant according to NEK 606 - status 2018
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	Halogen-free	According to DIN EN 60754
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 10467 and 20233, 300 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	DNV	Type approval certificate TAE00003X4
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF77.UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
	DESINA	According to VDW, DESINA standardisation
	CE	According to 2014/35/EU



Certificates and standards

