

readycable® servo cable suitable for SEW 1335

4310, connection cable, PVC 15xd

MAT9451420



readycable® servo cable suitable for SEW 1335

4310, connection cable, PVC 15xd

- For flexing applications
- PVC outer jacket
- Not oil-resistant
- Silicone-free
- Flame retardant
- Overall shield
- Guarantee up to 4 years

Product description

Introducing the readycable® servo cable, designed for SEW 1335 4310 applications. This connection cable features a durable PVC outer jacket, perfect for flexing applications and indoor use. With flame retardant properties and an overall shield, it ensures safety and reliability. Ideal for unsupported travels up to 10m, it's perfect for wood and stone processing, packaging, and handling devices. Choose readycable® for dependable performance in your projects.

Manufacturer attributes

Manufacturer Part No	1335 4310
Cable type	Connecting cable

Connectors

Connector A	open cable end
Connector B	round plug, socket

General properties

Number of cores and conductor nominal cross-section	(4G2.5+2x(2x1.5)C)C
Outer diameter (d) max. mm	14.5 mm
Weight per km	325 kg/km
Copper index kg/km	217 kg/km



Electricity attributes



Nominal voltage

600/1,000V (according to DIN VDE 0298-3)

UL Voltage Rating

1000 V



Test voltage

4000V (according to DIN EN 50395)

Cable structure



Conductor

Conductor consisting of bare copper wires (according to DIN EN 60228).



Core insulation

Mechanically high-quality, especially low-capacitance TPE mixture.



Core stranding

Power cores and control pair elements wound together in an optimised pitch length.



Conductor colours

Power cores: Cores black with white digits, one core green-yellow. 1st core: U / L1 / C / L+ 2nd core: V / L2 3rd core: W / L3 / D / L- 2 control pairs: cores black with white digits. 1st control wire: 5 2nd control wire: 6 3rd control wire: 7 4th control wire: 8

Core group 1 core structure

4G2.5

Core group 2 core structure

2x(2x1.5)C/C



Element shield

Foil taping of optimised, flexible foil shield.



Overall shield

Braiding made of tinned copper wires. Cover approx. 60% optical.




Outer jacket

Low-adhesion PVC mixture, adapted to suit the requirements in e-chains®.



Outer jacket colour

Pastel orange (comparable to RAL 2003)

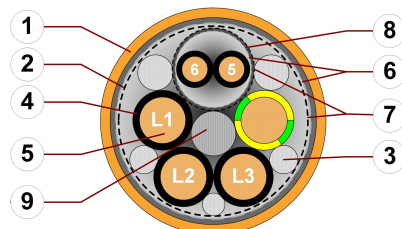

1. Outer jacket: pressure-extruded PVC mixture
2. Overall shield: braiding made of tinned copper wires
3. Filler: plastic yarns
4. Core insulation: mechanically high-quality, especially low-capacitance TPE mixture
5. Conductor: strands consisting of bare copper wires
6. Shield film: aluminium-coated plastic foil
7. Banding: plastic foil
8. Element shield: tinned copper wires wrapped around it
9. Strain relief: plastic core element



Properties and approvals

	UV resistance	none
	Oil resistance	No oil resistance
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 10492 and 2570, 1000 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	CE	According to 2014/35/EU



Dynamic properties

	Min. bend radius, e-chain (factor)	15 x d
	Min. bend radius, e-chain	217.5 mm
	Min. bend radius, flexible (factor)	12 x d
	Min. bend radius, fixed (factor)	8 x d
	Temperature e-chain®	+5°C up to +70°C
	Temperature, flexible	-5°C to +70°C (according to DIN EN 60811-504)
	Temperature, fixed	-15°C to +70°C (according to DIN EN 50305)
	v max. unsupported (speed)	3 m/s
	v max. gliding (speed)	0 m/s
	a max. (acceleration)	20 m/s ²
	travel length	Class 1
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions
Further information: [chainflex® guarantee](#)

Double strokes*	1 million	3 million	5 million
Temperature,	R min.	R min.	R min.
from/to [°C]	[Factor x d]	[Factor x d]	[Factor x d]
+5 / +15	17.5	18.5	19.5
+15 / +60	15	16	17
+60 / +70	17.5	18.5	19.5

* Higher number of double strokes possible - use the service life calculation function on this page.

Certificates and standards

