

readycable® brake cable suitable for Fanuc

LX660-8077-T311, basic cable iguPUR 12.5xd

MAT9510919



readycable® brake cable suitable for Fanuc

LX660-8077-T311, basic cable iguPUR 12.5xd

- For flexing applications
- iguPUR outer jacket
- Overall shield
- Flame retardant
- Silicone-free
- UV-resistant
- Oil-resistant (according to DIN EN 50363-10-2)
- Guarantee up to 4 years

Product description

Introducing the readycable® brake cable, specially designed for the Fanuc LX660-8077-T311. This durable cable features an iguPUR outer jacket, making it ideal for flexing applications. It's flame-retardant, silicone-free, and UV-resistant, ensuring reliable performance indoors and outdoors without direct sunlight. With oil resistance and suitability for unsupported travels up to 10m, this cable is perfect for processing, machine tools, and low-temperature applications. Upgrade your equipment with this versatile solution.

Manufacturer attributes

Manufacturer Part No	LX660-8077-T311
Cable type	Basic cable

Connectors

Connector A	Plug-in connector, pin, angled, 4-pin
Connector B	val_265

General properties

Number of cores and conductor nominal cross-section	(3G0.75)C
Outer diameter (d) max. mm	7 mm
Weight per km	63 kg/km
Copper index kg/km	37 kg/km




Electricity attributes

	Nominal voltage	300/500V
	UL Voltage Rating	600 V
	Test voltage	2000V (according to DIN EN 50395)
	Maximum conductor resistance at 20°C [Ω /km]	26.0000

Cable structure

	Conductor	Conductor consisting of bare copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	Cores wound with an optimised pitch length.
	Conductor colours	cores black with white numbers, one core green-yellow.
	Core group 1 core structure	(3G0.75)C
	Overall shield	Braiding made of tinned copper wires. Cover approx. 60% optical.
	Outer jacket	Low-adhesion iguPUR mixture, adapted to suit the requirements in e-chains®.
	Outer jacket colour	Jet black (comparable to RAL 9005)

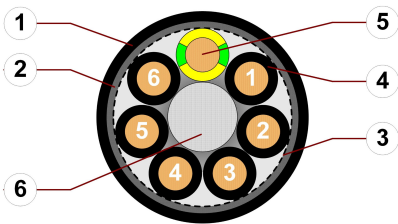

- 1. Outer jacket: pressure extruded iguPUR mixture
- 2. Overall shield: braiding made of tinned copper wires
- 3. Banding: plastic foil
- 4. Core insulation: mechanically high-quality TPE mixture
- 5. Conductor: made of bare copper wires
- 6. Filler: plastic yarns



Properties and approvals

	UV resistance	Medium
Oil resistance		Oil-resistant (according to DIN EN 50363-10-2), Class 3
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 11323 and 20940, 600 V, 80 °C
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	CE	According to 2014/35/EU



Dynamic properties

	Min. bend radius, e-chain (factor)	12.5 x d
	Min. bend radius, e-chain	87.5 mm
	Min. bend radius, flexible (factor)	10 x d
	Min. bend radius, fixed (factor)	7 x d
	Temperature e-chain®	-20°C up to +80°C
	Temperature, flexible	-40°C to +80°C (according to DIN EN 60811-504)
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	3 m/s
	v max. gliding (speed)	0 m/s
	a max. (acceleration)	20 m/s ²
	travel length	Class 1
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	1 million	3 million	5 million
Temperature,	R min.	R min.	R min.
from/to [°C]	[Factor x d]	[Factor x d]	[Factor x d]
-20 / -10	15	16	17
-10 / +70	12.5	13.5	14.5
+70 / +80	15	16	17

* Higher number of double strokes possible - use the service life calculation function on this page.

Certificates and standards

