

readycable® power cable suitable for Fanuc

LX660-8077-T470, basic cable iguPUR 15xd

MAT9560925



readycable® power cable suitable for Fanuc

LX660-8077-T470, basic cable iguPUR 15xd

- For flexing applications
- iguPUR outer jacket
- Overall shield
- Flame retardant
- Silicone-free
- UV resistance: medium
- Oil-resistant (according to DIN EN 50363-10-2)
- Guarantee up to 4 years

Product description

Introducing the readycable® power cable, designed specifically for the Fanuc LX660-8077-T470. This versatile cable features a robust iguPUR outer jacket, making it ideal for flexing applications and resistant to oil, flames, and UV exposure. Perfect for both indoor and outdoor use without direct sunlight, it supports unsupported travels up to 10m, making it suitable for various processing and machine tools, even in low-temperature environments. Experience durability and reliability with readycable®.

Manufacturer attributes

Manufacturer Part No	LX660-8077-T470
Cable type	Basic cable

Connectors

Connector A	val_242
Connector B	Round connector, socket, straight, 4-pin

General properties

Number of cores and conductor nominal cross-section	(4G4.0)C
Outer diameter (d) max. mm	12 mm
Weight per km	257 kg/km
Copper index kg/km	204 kg/km



Electricity attributes



Nominal voltage

600/1,000V (according to DIN VDE 0298-3)

UL Voltage Rating

1000 V



Test voltage

4000V (according to DIN EN 50395)

Cable structure



Conductor

Conductor consisting of bare copper wires (according to DIN EN 60228).



Core insulation

Mechanically high-quality, especially low-capacitance TPE mixture.



Core stranding

Cores wound with an optimised pitch length.



Conductor colours

cores black with white numbers, one core green-yellow. 1st core: U / L1 / C / L+ 2nd core: V / L2 3rd core: W / L3 / D / L- (4G4.0)C

Core group 1 core structure



Overall shield

Braiding made of tinned copper wires. Cover approx. 60% optical.




Outer jacket

Low-adhesion iguPUR mixture, adapted to suit the requirements in e-chains®.



Outer jacket colour

Pastel orange (comparable to RAL 2003)

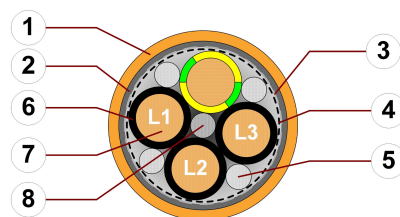

1. Outer jacket: pressure extruded iguPUR mixture
2. Overall shield: braiding made of tinned copper wires
3. Shield film: aluminium-coated plastic foil
4. Banding: plastic foil
5. Filler: plastic yarns
6. Core insulation: mechanically high-quality, especially low-capacity TPE mixture
7. Conductor: strands consisting of bare copper wires
8. Strain relief: plastic core element



Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (according to DIN EN 50363-10-2), Class 3
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 10492 and 20940, 1000 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	CE	According to 2014/35/EU



Dynamic properties

	Min. bend radius, e-chain (factor)	15 x d
	Min. bend radius, e-chain	180 mm
	Min. bend radius, flexible (factor)	12 x d
	Min. bend radius, fixed (factor)	8 x d
	Temperature e-chain®	-40°C up to +80°C
	Temperature, flexible	-5°C up to +80°C
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	3 m/s
	v max. gliding (speed)	0 m/s
	a max. (acceleration)	20 m/s ²
	travel length	Class 1
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	1 million	3 million	5 million
Temperature,	R min.	R min.	R min.
from/to [°C]	[Factor x d]	[Factor x d]	[Factor x d]
-20 / -10	17.5	18.5	19.5
-10 / +70	15	16	17
+70 / +80	17.5	18.5	19.5

* Higher number of double strokes possible - use the service life calculation function on this page.

Certificates and standards

