

readycable® hybrid cable suitable for Allen Bradley

2090-CSWM1E1-18AF, extension cable PVC 10xd

MAT9751716



readycable® hybrid cable suitable for Allen

Bradley 2090-CSWM1E1-18AF, extension cable

PVC 10xd

- For medium-duty applications
- PVC outer jacket
- Shielded
- Oil-resistant
- Flame retardant
- Guarantee up to 4 years

Product description

Introducing the readycable® hybrid cable, designed for use with Allen Bradley 2090-CSWM1E1-18AF. This extension cable features a durable PVC outer jacket, making it suitable for medium duty applications. It's oil resistant and flame retardant, ensuring reliability in various environments. Ideal for indoor and outdoor use at temperatures above 5°C, this cable is perfect for wood and stone processing, packaging, and handling devices. Choose the readycable® for dependable performance in your projects.

Manufacturer attributes

Manufacturer Part No	2090-CSWM1E1-18AF
Cable type	Extension cable

Connectors

Connector A	round plug, socket
Connector B	coupling, pin

General properties

Number of cores and conductor nominal cross-section	(4G1.0+(2x0.75)C)+(2xAWG22)C
Outer diameter (d) max. mm	12 mm
Weight per km	200 kg/km
Copper index kg/km	129 kg/km




Electricity attributes

	Nominal voltage	600/1,000V (according to DIN VDE 0298-3)
	UL Voltage Rating	1000 V
	Test voltage	4000V (according to DIN EN 50395)



Cable structure

	Conductor	Stranded conductor in a bend-resistant version consisting of bare copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality, especially low-capacity XLPE mixture.
	Core stranding	Power cores and control pair elements wound with a short pitch length around a high tensile strength centre element.
	Conductor colours	According to servo hybrid specification.
Core group 1 core structure		4G1.0
Core group 1 colour code		3 black cores with white printing: 1st core: U/L1/C/L+ 2nd core: V/L2 3rd core: W/L3/D/L- followed by a green-yellow core
Core group 2 core structure		(2x0.75)C
	Element shield	Flexible braiding made of tinned copper wires.
	Overall shield	Bend-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical
	Outer jacket	Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-4-1).
	Outer jacket colour	Pastel orange (comparable to RAL 2003)

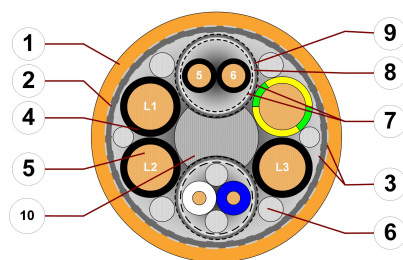

1. Outer jacket: pressure extruded, PUR mixture Pressure extruded, PVC mixture
2. Overall shield: extremely flexible braiding made of tinned copper wires
3. Banding: plastic fleece
4. Core insulation: mechanically high-quality, especially low-capacity TPE mixture
5. Conductor: particularly resistant to bending made of bare copper wires
6. Filler: plastic yarns
7. Element banding: plastic foil
8. Shield film: aluminium-coated plastic foil
9. Element shield: bend-resistant braiding of tinned copper wires
10. Strain relief: high tensile strength centre element



Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (according to DIN EN 50363-4-1), Class 2
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	UL verified	Certificate no. V293650: "igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 10989 and 2570, 1000 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 2. The outer jacket material of this series complies with CF5.10.07 - tested by IPA according to standard DIN EN ISO 14644-1
	CE	According to 2014/35/EU



Dynamic properties

	Min. bend radius, e-chain (factor)	10 x d
	Min. bend radius, e-chain	120 mm
	Min. bend radius, flexible (factor)	8 x d
	Min. bend radius, fixed (factor)	5 x d
	Temperature e-chain®	+5°C up to +70°C
	Temperature, flexible	-5°C to +70°C (according to DIN EN 60811-504)
	Temperature, fixed	-15°C to +70°C (according to DIN EN 50305)
	v max. unsupported (speed)	10 m/s
	v max. gliding (speed)	2 m/s
	a max. (acceleration)	50 m/s ²
	travel length	Class 2
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*					5 million	7.5 million	10 million
Temperature,	v max. [m/s]		a max.	Travel	R min. [Factor x d]	R min. [Factor x d]	R min. [Factor x d]
from/to [°C]	unsupported	gliding	[m/s²]	[m]			
+5 / +15					12.5	13.5	14.5
+15 / +60	10	2	50	≤ 10	10	11	12
+60 / +70					12.5	13.5	14.5

* Higher number of double strokes possible - please ask for your individual calculation.

Certificates and standards

