

readycable® hybrid cable suitable for Allen Bradley

2090-CSWM1DG-14AF, basic cable PVC 10xd

MAT9751721



readycable® hybrid cable suitable for Allen

Bradley 2090-CSWM1DG-14AF, basic cable

PVC 10xd

- For medium-duty applications
- PVC outer jacket
- Shielded
- Oil-resistant
- Flame retardant
- Guarantee up to 4 years

Product description

Introducing the readycable® hybrid cable, designed specifically for the Allen Bradley 2090-CSWM1DG-14AF. This medium-duty cable features a durable PVC outer jacket that is oil resistant and flame retardant, ensuring reliability in various environments. Ideal for indoor and outdoor applications above 5°C, it supports unsupported travel distances and gliding applications up to 10m. Perfect for wood/stone processing, packaging, and handling devices, this silicone-free cable is your go-to solution for versatile connectivity.

Manufacturer attributes

|                      |                   |
|----------------------|-------------------|
| Manufacturer Part No | 2090-CSWM1DG-14AF |
| Cable type           | Basic cable       |

Connectors

|             |                    |
|-------------|--------------------|
| Connector A | round plug, socket |
| Connector B | open cable end     |

General properties

|                                                     |                               |
|-----------------------------------------------------|-------------------------------|
| Number of cores and conductor nominal cross-section | (4G2.5+(2x1.0)C)+(2xAWG22)C)C |
| Outer diameter (d) max. mm                          | 14.5 mm                       |
| Weight per km                                       | 289 kg/km                     |
| Copper index kg/km                                  | 199 kg/km                     |




Electricity attributes

|                                                                                  |                   |                                          |
|----------------------------------------------------------------------------------|-------------------|------------------------------------------|
|  | Nominal voltage   | 600/1,000V (according to DIN VDE 0298-3) |
|                                                                                  | UL Voltage Rating | 1000 V                                   |
|  | Test voltage      | 4000V (according to DIN EN 50395)        |



## Cable structure

|                                                                                    |                            |                                                                                                                           |
|------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------|
|    | <b>Conductor</b>           | Stranded conductor in a bend-resistant version consisting of bare copper wires (according to DIN EN 60228).               |
|    | <b>Core insulation</b>     | Mechanically high-quality, especially low-capacity XLPE mixture.                                                          |
|    | <b>Core stranding</b>      | Power cores and control pair elements wound with a short pitch length around a high tensile strength centre element.      |
|    | <b>Conductor colours</b>   | According to servo hybrid specification.                                                                                  |
| <b>Core group 1 core structure</b>                                                 |                            | 4G2.5                                                                                                                     |
| <b>Core group 1 colour code</b>                                                    |                            | 3 black cores with white printing: 1st core: U/L1/C/L+ 2nd core: V/L2 3rd core: W/L3/D/L- followed by a green-yellow core |
| <b>Core group 2 core structure</b>                                                 |                            | (2x1.0)C                                                                                                                  |
|    | <b>Element shield</b>      | Flexible braiding made of tinned copper wires.                                                                            |
|    | <b>Overall shield</b>      | Bend-resistant braiding made of tinned copper wires. Coverage approx. 55% linear, approx. 80% optical                     |
|   | <b>Outer jacket</b>        | Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-4-1).   |
|  | <b>Outer jacket colour</b> | Pastel orange (comparable to RAL 2003)                                                                                    |

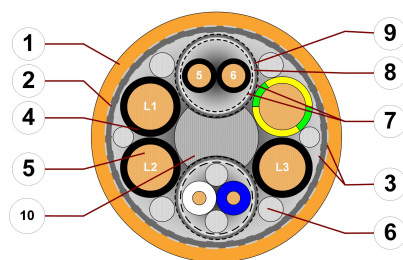

1. Outer jacket: pressure extruded, PUR mixture Pressure extruded, PVC mixture
2. Overall shield: extremely flexible braiding made of tinned copper wires
3. Banding: plastic fleece
4. Core insulation: mechanically high-quality, especially low-capacity TPE mixture
5. Conductor: particularly resistant to bending made of bare copper wires
6. Filler: plastic yarns
7. Element banding: plastic foil
8. Shield film: aluminium-coated plastic foil
9. Element shield: bend-resistant braiding of tinned copper wires
10. Strain relief: high tensile strength centre element



## Properties and approvals

|                                                                                    |                        |                                                                                                                                                     |
|------------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>UV resistance</b>   | Medium                                                                                                                                              |
|    | <b>Oil resistance</b>  | Oil-resistant (according to DIN EN 50363-4-1), Class 2                                                                                              |
|    | <b>Flame-retardant</b> | According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame                                                                            |
|    | <b>Silicone-free</b>   | Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)                                                           |
|    | <b>UL verified</b>     | Certificate no. V293650: "igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"                |
|    | <b>UL/CSA AWM</b>      | Style 10989 and 2570, 1000 V, 80 °C                                                                                                                 |
|    | <b>NFPA</b>            | According to NFPA 79-2018, chapter 12.9                                                                                                             |
|   | <b>REACH</b>           | In accordance with Regulation (EC) No. 1907/2006 (REACH)                                                                                            |
|  | <b>Lead-free</b>       | According to 2011/65/EU (RoHS-II/RoHS-III)                                                                                                          |
|  | <b>Cleanroom</b>       | According to ISO Class 2. The outer jacket material of this series complies with CF5.10.07 - tested by IPA according to standard DIN EN ISO 14644-1 |
|  | <b>CE</b>              | According to 2014/35/EU                                                                                                                             |



## Dynamic properties

|                                                                                    |                                     |                                               |
|------------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------|
|    | Min. bend radius, e-chain (factor)  | 10 x d                                        |
|    | Min. bend radius, e-chain           | 145 mm                                        |
|    | Min. bend radius, flexible (factor) | 8 x d                                         |
|    | Min. bend radius, fixed (factor)    | 5 x d                                         |
|    | Temperature e-chain®                | +5°C up to +70°C                              |
|    | Temperature, flexible               | -5°C to +70°C (according to DIN EN 60811-504) |
|    | Temperature, fixed                  | -15°C to +70°C (according to DIN EN 50305)    |
|    | v max. unsupported (speed)          | 10 m/s                                        |
|   | v max. gliding (speed)              | 2 m/s                                         |
|  | a max. (acceleration)               | 50 m/s <sup>2</sup>                           |
|  | travel length                       | Class 2                                       |
|  | torsion                             | No torsion                                    |



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

| Double strokes* |              |         |        |        | 5 million           | 7.5 million         | 10 million          |
|-----------------|--------------|---------|--------|--------|---------------------|---------------------|---------------------|
| Temperature,    | v max. [m/s] |         | a max. | Travel | R min. [Factor x d] | R min. [Factor x d] | R min. [Factor x d] |
| from/to [°C]    | unsupported  | gliding | [m/s²] | [m]    |                     |                     |                     |
| +5 / +15        |              |         |        |        | 12.5                | 13.5                | 14.5                |
| +15 / +60       | 10           | 2       | 50     | ≤ 10   | 10                  | 11                  | 12                  |
| +60 / +70       |              |         |        |        | 12.5                | 13.5                | 14.5                |

\* Higher number of double strokes possible - please ask for your individual calculation.

Certificates and standards

