

readycable® signal cable suitable for Siemens

DriveCliq i6FX8002-2DC34-1AD0(3m), extension

cable PUR 7.5xd

MAT9841541



readycable® signal cable suitable for Siemens

DriveCliq i6FX8002-2DC34-1AD0(3m),

extension cable PUR 7.5xd

- For extremely heavy duty applications
- PUR outer jacket
- Oil-resistant (according to DIN EN 50363-10-2)
- Halogen-free
- Silicone-free
- Flame retardant
- Offshore
- Coolant-resistant
- Hydrolysis and microbe-resistant
- Overall shield
- Guarantee up to 4 years

Product description

Introducing the readycable® signal cable, designed for Siemens DriveCliq i6FX8002-2DC34-1AD0. This 3m extension cable features a durable PUR outer jacket, making it ideal for extremely heavy-duty applications. It boasts exceptional oil resistance, is halogen-free, and flame retardant, ensuring safety and reliability. Suitable for both indoor and outdoor use (without direct sunlight), it withstands various conditions, including low temperatures and coolant exposure. Perfect for storage, machining, and cleanroom environments.

Manufacturer attributes

Manufacturer Part No	i6FX8002-2DC34-1AD0(3m)
Cable type	Extension cable

Connectors

Connector A	Round connector M12 pin 8-pin
Connector B	Round connector M12 socket 8-pin



General properties

Number of cores and conductor nominal cross-section	(2x(2x0.20)+(2x0.38))C
Outer diameter (d) max. mm	7.5 mm
Weight per km	69 kg/km
Copper index kg/km	44 kg/km


Electricity attributes

	Nominal voltage	50V
UL Voltage Rating		300 V
	Test voltage	500V



Cable structure

	Conductor	Stranded conductor in an especially flexible design consisting of tinned copper wires (according to DIN EN 60228).
	Core insulation	Mechanically high-quality TPE mixture.
	Core stranding	According to measuring system specification
	Conductor colours	according to measuring system specification
Core group 1 core structure		2x(2x0.20)
Core group 1 colour code		green/yellow, pink/blue
Core group 2 core structure		(2x0.38)
	Element shield	Extremely flexible braiding made of tinned copper wires. Coverage linear approx. 70%, optical approx. 90%
Element jacket		TPE mixture on pair shielding adapted to suit the requirements in e-chains®.
Inner jacket		TPE mixture adapted to suit the requirements in e-chains®.
	Overall shield	Extremely flexible braiding made of tinned copper wires. Coverage linear approx. 70%, optical approx. 90%
	Outer jacket	Low-adhesion, halogen-free, highly abrasion-resistant PUR mixture, adapted to suit the requirements in e-chains® (according to DIN EN 50363-10-2).
	Outer jacket colour	Yellow-green (comparable to RAL 6018)
CFRIP®		Strip cables faster: a tear strip is moulded into the inner jacket

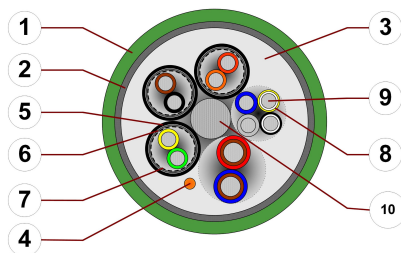

1. Outer jacket: pressure extruded PUR mixture
2. Banding: plastic fleece
3. Overall shield: extremely flexible braiding made of tinned copper wires
4. Inner jacket: pressure-extruded, gusset-filling TPE mixture
5. CFRIP: tear strip for faster stripping
6. Element jacket: mechanically high-quality TPE mixture
7. Element shield: extremely flexible tinned copper wire
8. Banding: plastic foil
9. Core insulation: mechanically high-quality TPE mixture
10. Conductor: stranded wire conductors in a particularly flexible design made of tinned copper wires
11. Strain relief: high tensile strength centre element



Dynamic properties

	Min. bend radius, e-chain (factor)	7.5 x d
	Min. bend radius, e-chain	56.25 mm
	Min. bend radius, flexible (factor)	6 x d
	Min. bend radius, fixed (factor)	4 x d
	Temperature e-chain®	-25°C up to +80°C
	Temperature, flexible	-40°C to +80°C (according to DIN EN 60811-504)
	Temperature, fixed	-50°C to +80°C (according to DIN EN 50305)
	v max. unsupported (speed)	10 m/s
	v max. gliding (speed)	5 m/s
	a max. (acceleration)	50 m/s ²
	travel length	Class 5
	torsion	No torsion



chainflex®Lifetime

Guaranteed service life for this series according to guarantee conditions

Further information: [chainflex® guarantee](#)

Double strokes*	5 million	7.5 million	10 million
Temperature,	R min.	R min.	R min.
from/to [°C]	[Factor x d]	[Factor x d]	[Factor x d]
-25 / -15	10	11	12
-15 / +70	7.5	8.5	9.5
+70 / +80	10	11	12

* Higher number of double strokes possible - use the service life calculation function on this page.



Properties and approvals

	UV resistance	Medium
	Oil resistance	Oil-resistant (according to DIN EN 50363-10-2), Class 3
	Offshore	MUD-resistant according to NEK 606 - status 2018
	Flame-retardant	According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2/Horizontal Flame
	Silicone-free	Free from silicone which can affect paint adhesion (according to PV 3.10.7 – status 1992)
	Halogen-free	According to DIN EN 60754
	UL verified	Certificate no. V293650: "The igus 4-year chainflex cable guarantee and service life calculator based on 2 billion test cycles per year"
	UL/CSA AWM	Style 1589 and 20236, 30 V, 80 °C
	NFPA	According to NFPA 79-2018, chapter 12.9
	DNV	Type approval certificate TAE00003X4
	REACH	In accordance with Regulation (EC) No. 1907/2006 (REACH)
	Lead-free	According to 2011/65/EU (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 1. The outer jacket material of this series complies with CF77.UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
	DESINA	According to VDW, DESINA standardisation
	CE	According to 2014/35/EU



Certificates and standards

