



Drawing

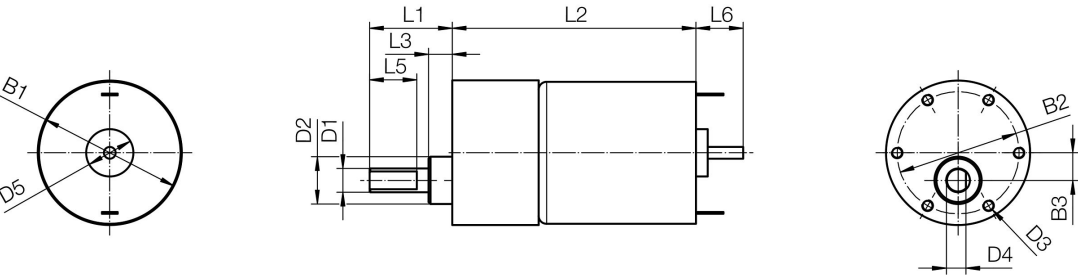

B1	37 mm ±1	L1	21 mm	Ø D1	6 mm
B2	31 mm ±1	L2	59.5 mm ±1	Ø D2	12 mm
B3	7 mm	L3	6 mm ±0,25	Ø D3	M3
		L5	12 mm	D4	5.5 mm
		L6	12 mm	D5	12 mm

Curves

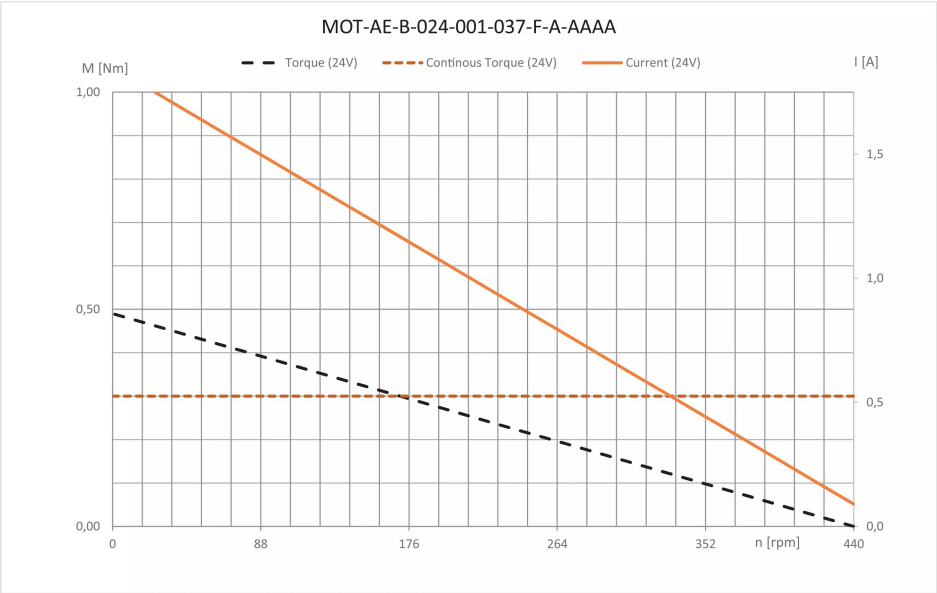

Motor

Nominal Voltage [VDC]	24
Rated torque [Nm]	0.1
Rated speed [1/min]	350
Nominal current [A]	0.5
Idling speed (motor) [rpm]	440
No-load current [A]	0.09
Starting torque [Nm]	0.3
Starting current [A]	1.85
Shaft load, axial [N]	6.8
Shaft load, radial [N]	9.8

General

Reduction gearing	10 i
Ambient temperature [°C]	-10 - +60°C
Max. temperature rise permissible [°C]	60
Air humidity (non condensing) [%]	85
Protection class	IP30
Operating modes	S2 (short-term operation)

Motor

Motor	Motor Cable	
Flat 4.8x0.4		
PIN	Signal	Number
Red	+	1
/	-	2

