


drylin® R linear slide bearing OJUM-01

OJUM-01-10

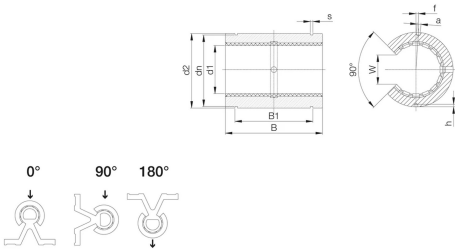

drylin® R linear slide bearing OJUM-01

- Open anodised aluminium adapter
- For supported shafts
- Material of the liner: iglidur® J

|      |         |
|------|---------|
| Ø dn | 17.5 mm |
| W    | 7.3 mm  |
| B1   | 21.6 mm |
| f    | 0mm     |
| B    | 29 mm   |
| Ø d1 | 10 mm   |
| a    | 0 mm    |
| h    | 1.2 mm  |
| s    | 1.3 mm  |
| Ø d2 | 19 mm   |

Product description

Discover the drylin R linear slide bearing OJUM-01, designed with an open anodised aluminium adapter for supported shafts. Its liner is made from high-quality iglidur J material, ensuring durability and smooth operation. This innovative bearing is perfect for a variety of applications, delivering reliable performance you can count on. Upgrade your projects with the efficiency of the OJUM-01 linear slide bearing today.

Requirements

|                                                         |    |
|---------------------------------------------------------|----|
| Mould-resistant according to DIN EN ISO 846 Procedure A | No |
|---------------------------------------------------------|----|

Manufacturing and installation tolerances

|              |                 |
|--------------|-----------------|
| d1 tolerance | +0.030 +0.088mm |
| d2 tolerance | h7              |
| B tolerance  | h10             |
| s tolerance  | H10             |
| dn tolerance | h10             |



Dimensions

|      |         |
|------|---------|
| Ø d1 | 10 mm   |
| Ø d2 | 19 mm   |
| W    | 7.3 mm  |
| B    | 29 mm   |
| B1   | 21.6 mm |
| s    | 1.3 mm  |
| Ø dn | 17.5 mm |

General properties

|                          |            |
|--------------------------|------------|
| Sliding element material | iglidur® J |
|--------------------------|------------|

Certificates and standards



## Additional information and diagrams

