


drylin® R linear slide bearing OXUM-03

OXUM-03-12

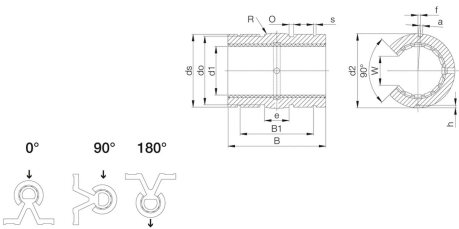

drylin® R linear slide bearing OXUM-03

- With reduced outer diameter, spherical area on the outer diameter, O-rings for elastic seating and hard-anodised surface
- Material of the liner: iglidur® X

W	9 mm
B1	22.8 mm
Ø do	18.4 mm
o	1.86 mm
Ø ds	21.5 mm
f	1.33 mm (7°)
B	31.9 mm
Ø d1	12 mm
a	3 mm
e	6 mm
R	18 mm
h	1.2 mm
s	1.3 mm
Ø d2	21.8 mm

Product description

Introducing the drylin R linear slide bearing OXUM-03 from the trusted brand, drylin. This innovative bearing features a reduced outer diameter and a unique spherical area for enhanced performance. Designed with O-rings for elastic seating and a hard-anodised surface, it ensures durability and reliability. Crafted from iglidur X material, it promises exceptional wear resistance. Upgrade your applications with this efficient and high-quality linear slide bearing.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.088mm
d2 tolerance	h8
B tolerance	h10
s tolerance	H10
ds tolerance	h10
o tolerance	+0,1 mm



Dimensions

Ø d1	12 mm
Ø d2	21.8 mm
W	9 mm
B	31.9 mm
B1	22.8 mm
s	1.3 mm
Ø ds	21.5 mm
Ø do	18.4 mm
o	1.86 mm
e	6 mm

General properties

Sliding element material	iglidur® X
--------------------------	------------

Certificates and standards

