
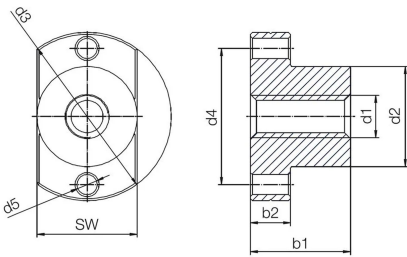


drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, RFRI

RFRI-02-1-5



drylin® flange lead screw nut with spanner flat,
thermoplastic ACME, RFRI

- Material: iglide® R
- Thread direction: Right-hand thread
- Thread type: ACME
- Design: Standard
- Cylindrical lead screw nut with flange

Product description

Introducing the drylin flange lead screw nut with spanner flat by igus. Crafted from high-performance iglidur R thermoplastic, this nut is designed for medium to high speeds while effectively dampening vibrations for a quieter operation. Its wear-resistant properties ensure durability and reliability, even in challenging environments. With a temperature range of up to +90°C, it's perfect for various applications. Experience low-maintenance and lubrication-free performance with this innovative lead screw nut.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

General properties

Thread direction	Right-hand thread
Thread type	ACME; US standard
With spanner flat	Yes
Weight	269.5 g



Dimensions

Thread size	1-5
Ø d1	1 in
Ø d2	1.5 in
Ø d3	2.5 in
Ø d4	2 in
Ø d5	0.28 in
b2	0.59 in