


drygear® Apiro gearbox with manual clamping,  
position indicator and handwheel  
**RL-A10.0129**

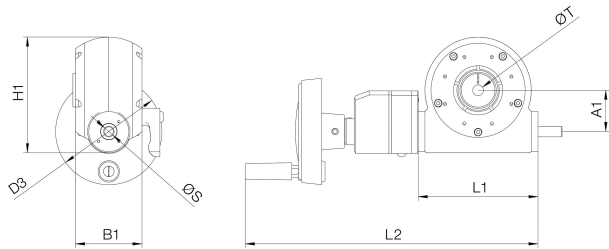

drygear® Apiro gearbox with manual clamping,  
position indicator and handwheel

- Available ratios: 4:1, 8:1, 32:1, 64:1
- Output torque: 2.5Nm
- Output: Coupling for 8mm shaft diameter
- Drive: Hand clamp, position indicator & handwheel

|          |           |
|----------|-----------|
| A1       | 31 mm     |
| L1       | 90 mm     |
| Weight   | 485.806 g |
| Backlash | 0.5 °     |
| B1       | 50 mm     |
| H1       | 87.5 mm   |
| L2       | 220 mm    |
| Ø S      | 8 mm      |
| Ø T      | 8 mm      |

Product description

The drygear Apiro gearbox features manual clamping, a position indicator, and a handwheel, making it ideal for precise format adjustments in packaging. It connects easily to drylin shafts with standard 8mm diameters, with options up to 12mm. Available in ratios of 4:1, 8:1, 32:1, and 64:1, it offers reliable output torque of 2.5Nm, perfect for synchronized manual operations.

General properties

|        |           |
|--------|-----------|
| Weight | 485.806 g |
|--------|-----------|

Mechanical properties

|              |          |
|--------------|----------|
| Backlash     | 0.5 °    |
| Rated torque | 2.5 Nm   |
| Transmission | 4:1      |
| Rated speed  | 80 r/min |



## Dimensions

---

|                    |         |
|--------------------|---------|
| Axis distance (A1) | 31 mm   |
| A1                 | 31 mm   |
| D3                 | 80 mm   |
| L1                 | 90 mm   |
| L2                 | 220 mm  |
| B1                 | 50 mm   |
| H1                 | 87.5 mm |
| Ø T                | 8 mm    |
| Ø S                | 8 mm    |