



drylin® laser sintering lead screw support with
iglidur® plain bearings, fixed bearings, right-hand
thread

SLS-12X3-FL

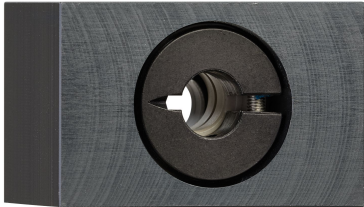

Product description

Introducing the drylin® laser sintering lead screw support, designed for precision and durability. This support features corrosion-free anodised aluminium housing and lubrication-free iglidur® plain bearings, ensuring maintenance-free operation. Available with fixed and floating bearing options, it accommodates thread sizes from 6 to 24 mm. Perfect for various applications, this right-hand thread support guarantees reliability and efficiency in your projects. Enhance your system with this innovative lead screw solution.

Physical properties

Max. axial static pressure load	1600 N
---------------------------------	--------

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

General properties

Weight	250.748 g
--------	-----------

Dimensions

Thread size	TR12X3
Ø d1	12 mm
E1	54 mm
H Bolt	46 mm
A	72 mm
lt	36 mm
tk	15 mm
ha	23 mm