


drylin® R steel shaft | low supported | SWUMN |
1.1213
SWUMN-12

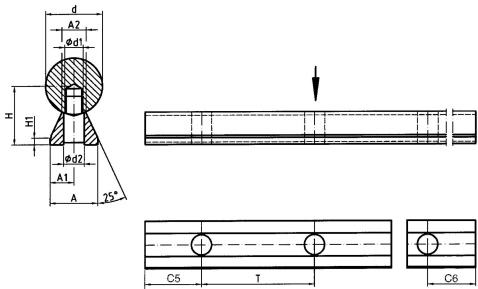

**drylin® R steel shaft | low supported | SWUMN |
1.1213**

- Cost-effective standard
- High load capacity
- Dry area applications
- Hard chrome plated also available
- Lower coefficient of friction against polymer bearings
- 1.1213 (Cf53) steel
- Aluminium support

Part number	SWUMN-12
Outer diameter d	12 mm
B	11 mm
H1	3 mm
A	11 mm
A1	5.5 mm
A2	5.4 mm
Thread d1	M4
Pitch T	75 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
max. length	6000 mm
Ø d2	4.5 mm
H	14.5 mm

Product description

Introducing the drylin R steel shaft, low supported SWUMN, crafted from durable 1.1213 steel. This cost-effective standard features high load capacity, making it ideal for dry area applications. Its lower coefficient of friction against polymer bearings ensures smooth operation. For added versatility, a hard chrome plated option is also available. Enhance your projects with the reliability and performance of this exceptional steel shaft.

Manufacturing and installation tolerances

d tolerance	h6
H-tolerance	±0,02 mm

General properties

Material	1.1213 (Cf53) steel
Surface roughness Ra	0,15 - 0,3 µm
Drilling pattern	Standard



Dimensions

Outer diameter d	12 mm
B	11 mm
Pitch T	75 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	57 mm
max. length	6000 mm
A	11 mm
A1	5.5 mm
A2	5.4 mm



Additional information and diagrams

