


drylin® T miniature guide rail TS-04

TS-04-09-UNGEBOHRT

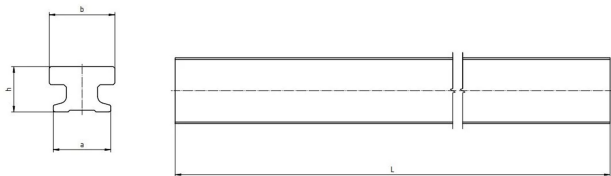

drylin® T miniature guide rail TS-04

- Miniature rail for small installation spaces
- Aluminium rail profile with hard-anodized surface
- Extruded profile made from material EN AW-6060 T66 with a surface hardness of 500 HV
- Lubrication-free, maintenance-free, lightweight and easy to install
- Temperature range -40 °C to +90 °C

Product description

Introducing the drylin® T miniature guide rail TS-04, designed for compact spaces. Crafted from lightweight aluminium with a hard-anodized surface, this guide rail ensures durability and ease of installation. Its lubrication-free and maintenance-free design allows for smooth operation in temperatures ranging from -40 °C to +90 °C. Experience the perfect blend of efficiency and reliability with the drylin® T miniature guide rail, ideal for your next project.

Manufacturing and installation tolerances

a-Tolerance	-0.2 mm
-------------	---------

General properties

size	04-09
Design	no holes

Mechanical properties

Geometrical moment of inertia Iy [mm4]	252
Geometrical moment of inertia Iz [mm4]	169
Moment of resistance Wby [mm3]	52
Moment of resistance Wbz [mm3]	49

Dimensions

a	9 mm
h	6.3 mm
h1	4.6 mm
b	9.6 mm



Certificates and standards

