
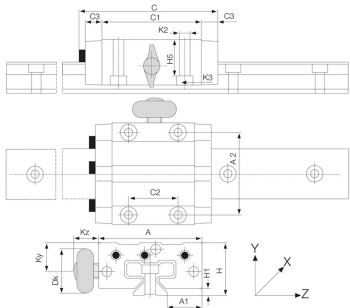


drylin® T guide carriage TW-01-HKA

TW-01-25-HKA

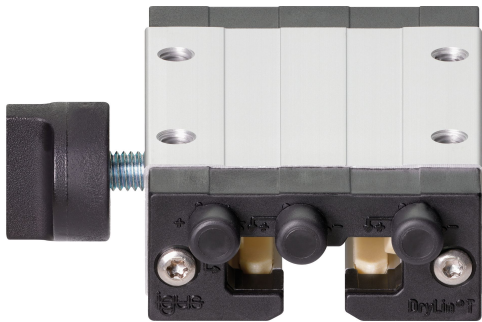

drylin® T guide carriage TW-01-HKA

- drylin® T linear carriage of the standard series 01
- With fitted manual clamp
- Individual clearance adjustment
- Long service life due to iglidur® J
- Optionally configurable as floating bearing version in y direction
- Material: aluminium housing, plastic lid, iglidur® J slider

Product description

Introducing the drylin T guide carriage TW-01-HKA, designed for precision and durability. This standard series carriage features a convenient manual clamp for easy individual clearance adjustment. Built with an aluminum housing and a plastic lid, it ensures a long service life thanks to the iglidur J slider. Additionally, it can be configured as a floating bearing version in the Y direction, making it a versatile choice for your projects. Experience reliable performance with the drylin T carriage.

Manufacturing and installation tolerances

H-tolerance	±0,35 mm
-------------	----------

Mechanical properties

Static load capacity Coy	10000 N
--------------------------	---------



Dimensions

H	36 mm
A	70 mm
C	96 mm
A1	23.5 mm
A2	57 mm
C1	68 mm
C2	45 mm
C3	11 mm
H1	5 mm
H5	24.8 mm
Thread K2	M8
Thread K3	M6
Kz	17 mm
Ky	19 mm
Dk	28 mm
Clamp thread	M8

General properties

Sliding element material	iglidur® J
size	01-25
Floating bearing	none

Certificates and standards

