


drylin® T guide carriage TWA-01

TWA-01-15

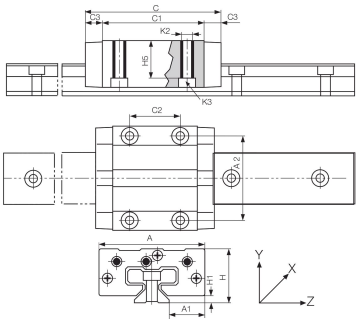

drylin® T guide carriage TWA-01

- drylin® T automatic linear carriage of the standard series 01
- With automatic bearing clearance adjustment
- Adjustment and cancellation of the pretension through the supplied pretension key
- In operation, the bearing clearance automatically adjusts itself
- Long service life due to iglidur® J
- Material: aluminium housing, plastic lid, iglidur® J slider

Product description

Introducing the drylin® T guide carriage TWA-01, a reliable automatic linear carriage designed for precision and durability. Featuring automatic bearing clearance adjustment, it ensures smooth operation with minimal wear. The lightweight aluminium housing, combined with a robust plastic lid and iglidur® J slider, guarantees a long service life. Perfect for applications requiring consistent linear motion, the TWA-01 is available as individual components or as a complete system to meet your specific needs.

Manufacturing and installation tolerances

|             |          |
|-------------|----------|
| H-tolerance | ±0,35 mm |
|-------------|----------|

Mechanical properties

|                          |        |
|--------------------------|--------|
| Static load capacity Coy | 4000 N |
|--------------------------|--------|



Dimensions

|           |       |
|-----------|-------|
| H         | 24 mm |
| A         | 47 mm |
| C         | 68 mm |
| A1        | 16 mm |
| A2        | 38 mm |
| C1        | 50 mm |
| C2        | 30 mm |
| C3        | 9 mm  |
| H1        | 4 mm  |
| H5        | 16 mm |
| Thread K2 | M5    |
| Thread K3 | M4    |

General properties

|                          |            |
|--------------------------|------------|
| Sliding element material | iglidur® J |
| size                     | 01-15      |
| Floating bearing         | none       |

Certificates and standards

