


drylin® trapezoidal lead screw nut with flange,
multi start, WFLM

WFLM-2835TR12X6P3

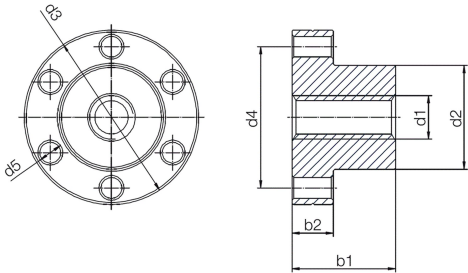

drylin® trapezoidal lead screw nut with flange,
multi start, WFLM

- Material: iglide® L280
- Thread direction: Left-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin trapezoidal lead screw nut with flange, multi start, WFLM from igus. Crafted from durable iglidur W300, this lead screw nut is designed for heavy-duty applications, offering high wear resistance and static strength. It operates effectively at low speeds and withstands temperatures up to +90°C. Enjoy a lubrication-free experience with quiet, vibration-free travel. Ideal for demanding environments, this robust component ensures long-lasting performance and reliability.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	37-56
----------------	-------

General properties

Thread direction	Left-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	No
Weight	104.5698 g



Dimensions

Thread size	TR12X6P3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm