


drylin® lead screw nut with spanner flat,
thermoplastic ACME, WFRI
WFRI-02-1-5

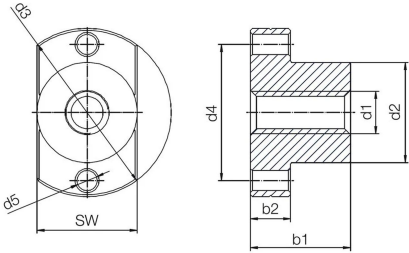

drylin® lead screw nut with spanner flat,
thermoplastic ACME, WFRI

- Material: iglide® L280
- Thread direction: Right-hand thread
- Thread type: ACME
- Design: Standard
- With spanner flat
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin® lead screw nut with spanner flat, crafted from high-performance iglidur® W300 thermoplastic. Designed for heavy-duty applications, it offers exceptional wear resistance and can handle loads up to 5MPa. This lubrication-free and maintenance-free nut operates quietly, even in challenging environments, while remaining chemical resistant and mold-free. With a temperature range from -20°C to +90°C, it ensures durability and reliability in various conditions. Experience robust performance with this advanced lead screw nut.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

General properties

Thread direction	Right-hand thread
Thread type	ACME; US standard
With spanner flat	Yes
Weight	240.8855 g



Dimensions

Thread size	1-5
Ø d1	1 in
Ø d2	1.5 in
Ø d3	2.5 in
Ø d4	2 in
Ø d5	0.28 in
b2	0.59 in