


dryspin lead screw nut out of iglide W300 |
geometry: flange with spanner flat | metric thread |
RH

WFRM-090913M5

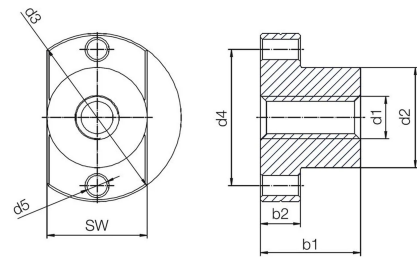

dryspin lead screw nut out of iglide W300 |
geometry: flange with spanner flat | metric
thread | RH

- Material: iglide® L280
- Thread direction: Right-hand thread
- Thread type: metric thread
- Design: Standard
- Cylindrical lead screw nut with flange

Product description

Introducing the drylin® flange lead screw nut with spanner flat from igus. Crafted from high-performance iglidur® W300 polymer, this nut is designed for heavy-duty applications, offering exceptional wear resistance and durability. Suitable for low speeds and capable of withstanding temperatures up to +90°C, it ensures maintenance-free operation. Its robust design guarantees quiet and vibration-free performance, making it an ideal choice for demanding environments. Choose reliability with the drylin® flange lead screw nut.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	17-30
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Metric thread; standard for highest compatibility
With spanner flat	Yes
Weight	6.15 g



Dimensions

Thread size	M5
Ø d1	5 mm
Ø d2	9 mm
Ø d3	18 mm
Ø d4	15.2 mm
Ø d5	3.2 mm
b1	13 mm
b2	3 mm