


drylin® trapezoidal lead screw nut with flange,
multi start, WFRM

WFRM-2835TR12X6P3

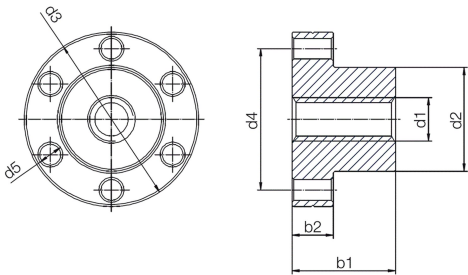

drylin® trapezoidal lead screw nut with flange,
multi start, WFRM

- Material: iglide® L280
- Thread direction: Right-hand thread
- Thread type: Trapezoidal threads
- Design: Standard
- Cylindrical lead screw nut with flange
- Multi start

Product description

Introducing the drylin® trapezoidal lead screw nut with flange, multi start, WFRM from igus. Made from high-performance iglidur® W300 polymer, this nut is designed for heavy-duty applications, offering exceptional wear resistance and static strength. It operates smoothly at low speeds and can withstand temperatures up to +90°C. Enjoy a lubrication-free, maintenance-free experience with robust performance in harsh environments. Ideal for applications requiring durability and reliability.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Thermal properties

Efficiency [η]	37-56
----------------	-------

General properties

Thread direction	Right-hand thread
Thread type	Trapezoidal threads; absorption of larger axial forces
With spanner flat	No
Weight	96.7271 g



Dimensions

Thread size	TR12X6P3
Ø d1	12 mm
Ø d2	28 mm
Ø d3	48 mm
Ø d4	38 mm
Ø d5	6 mm
b1	35 mm
b2	12 mm