
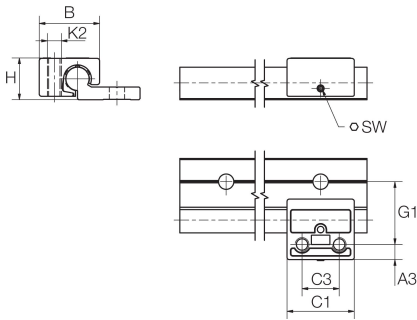


drylin W pillow block WJUME-01-ES-FG

WJUME-01-10-ES-FG



drylin W pillow block WJUME-01-ES-FG

- Material: stainless steel 1.4408 precision casting
- Material sliding element: iglide J

A3	6.5 mm
B	26 mm
C1	29 mm
C3	16 mm
SW	1.5 mm

Product description

Introducing the drylin W pillow block WJUME-01-ES-FG, a reliable solution for your application needs. Crafted from durable stainless steel 1.4408 precision casting, it ensures long-lasting performance. The sliding element features iglide J material, providing excellent wear resistance and low friction. This pillow block is designed for efficient operation, making it an essential addition to your machinery. Trust in the quality of drylin for superior functionality.

Mechanical properties

Static load capacity Coy	560 N
Static load capacity Coz+	560 N
Static load capacity Coz-	250 N
Preload housing	0 N

Dimensions

Floating bearing	none
A3	6.5 mm
B	26 mm
C1	29 mm
C3	16 mm
H	18 mm
SW	1.5 mm



General properties

size	01-10
Design	round
Sliding element material	iglidur® J