
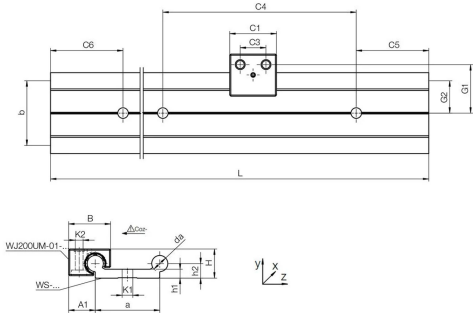


drylin W double rail CA | Anti-reflex

WS-06-20-AR



drylin W double rail CA | Anti-reflex

- Robust hard anodized or cost-effective in black anti-reflex (AR)
- Unobtrusive design
- Rail lenght up to 4,000 mm, delivery of desired lenghts accurate to the millimeter
- High surface moments on inertia, double rail, ly 8,234 mm⁴, lz 1,171 mm⁴

h1	4.5 mm
h2	7.5 mm
A1	13 mm
a	18 mm
b	20 mm
C4	60 mm
G1	22 mm
da	6 mm
H	14 mm
k1 thread	M4

Product description

Introducing the drylin W double rail CA anti-reflex AR in sleek black. This robust rail features a cost-effective design that blends seamlessly into any environment. With lengths available up to 4,000 mm, you can get the perfect fit tailored to your needs. Its unobtrusive design ensures it complements your setup while providing high surface moments on inertia. Elevate your projects with this reliable and stylish solution from the trusted drylin brand.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	No
---	----

Manufacturing and installation tolerances

H-tolerance	±0,25 mm
da-tolerance	-0,1 mm
a-Tolerance	-0,7 mm

Mechanical properties

max. length	3000 mm
-------------	---------



General properties

size	06-20
Design	antireflex
Hole	Through holes, two parallel hole series

Dimensions

H	14 mm
da	6 mm
a	18 mm
b	20 mm
h	4.5 mm
h1	4.5 mm
h2	7.5 mm
G1	22 mm
G2	10 mm
A1	13 mm
Q1	16.5 mm
Q2	15 mm
C4	60 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	49.5 mm
k1 thread	M4
Weight	367 g

Certificates and standards

