


drylin® W-Econ double rail WS-CA
WS-06-20-CA

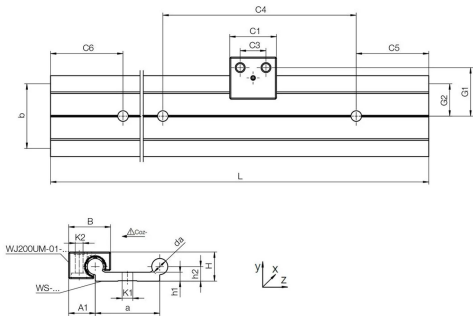

drylin® W-Econ double rail WS-CA

- Suitable for all drylin W single bearing housings and linear carriages
- Lifelong rattle-free due to combination with pre-loaded drylin W linear bearings series WJ200UM-01-Pxx
- Individual bearing clearance adjustment by using WJ200UME-01 bearing housings

h1	4.5 mm
h2	7.5 mm
A1	13 mm
a	18 mm
b	20 mm
C4	60 mm
G1	22 mm
da	6 mm
H	14 mm

Product description

Introducing the drylin® W-Econ double rail WS-CA, designed for seamless compatibility with all drylin® W single bearing housings and linear carriages. Experience lifelong rattle-free performance thanks to its innovative combination with pre-loaded drylin® W linear bearings. Enjoy the flexibility of individual bearing clearance adjustments using WJ200UME-01 bearing housings. Elevate your linear motion solutions with this reliable and efficient product from the drylin® family.

Manufacturing and installation tolerances

H-tolerance	±0,25 mm
da-tolerance	-0,1 mm
a-Tolerance	-0,7 mm

General properties

size	06-20
Design	Double Rail
Hole	Through holes, two parallel hole series

Mechanical properties

max. length	4000 mm
-------------	---------



Dimensions

H	14 mm
da	6 mm
a	18 mm
b	20 mm
h	4.5 mm
h1	4.5 mm
h2	7.5 mm
G1	22 mm
G2	10 mm
A1	13 mm
Q1	16.5 mm
Q2	15 mm
C4	60 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	49.5 mm
Weight	367 g

Certificates and standards

