


drylin W double rail WS-ES

WS-10-40-ES-FG

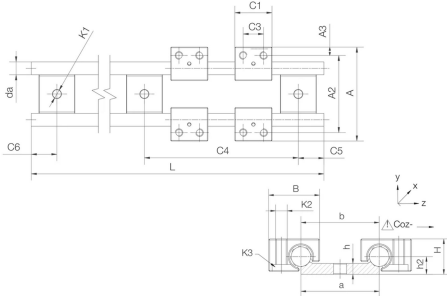

drylin W double rail WS-ES

- Identical connection dimensions to recirculating ball bearing and guideway assemblies size 15 and 20
- Corrosion resistant
- FDA-compliant and EU Regulation 10/2011

k1 thread	M6
A2	60 mm
da	10 mm
C5/C6 (max.)	79.5 mm
C5/C6 (min.)	20 mm
max. length	3000 mm
a	40 mm
b	40 mm
h	5.5 mm
C4	120 mm
h2	9 mm

Product description

Introducing the drylin W double rail WS-ES, a premium product from our trusted brand. Crafted from high-quality stainless steel, this linear system is designed to thrive in extreme environments, making it ideal for industries like food processing, yacht building, and medical applications. Its corrosion resistance ensures longevity, while compliance with FDA and EU regulations guarantees safety. With identical connection dimensions to existing assemblies, upgrading your systems has never been easier. Experience reliability with drylin W.

Manufacturing and installation tolerances

H-tolerance	±0.25 mm
da-tolerance	h9
a-Tolerance	±0.3 mm

Mechanical properties

max. length	3000 mm
-------------	---------

General properties

size	10-40
Design	Double Rail



Dimensions

H	18 mm
da	10 mm
a	40 mm
b	40 mm
h	5.5 mm
h2	9 mm
A2	60 mm
Q1	45.5 mm
Q2	46 mm
C4	120 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	79.5 mm
k1 thread	M6

Certificates and standards

