


drylin W double rail WSQ

WSQ-10-80-UNGEBOHRT

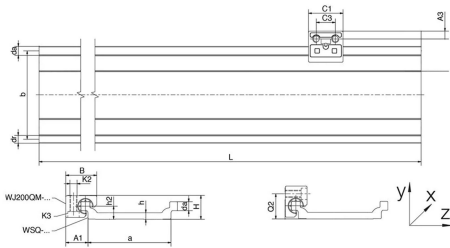

drylin W double rail WSQ

- Design: Double Rail
- Material: Aluminum, hard anodized
- Rail profile: Square
- Max length 4000mm except 06 versions which is 3000mm

Product description

Discover the drylin W double rail WSQ, a reliable solution for smooth linear motion. Designed for versatility, this product is perfect for various applications, offering durability and efficiency. Its innovative design ensures optimal performance, making it an ideal choice for your projects. Experience the quality and reliability of the drylin brand, tailored to meet your needs.

Manufacturing and installation tolerances

H-tolerance	±0,25 mm
da-tolerance	-0,1 mm
a-Tolerance	-0,7 mm

Mechanical properties

Geometrical moment of inertia Iy [mm4]	335000
Geometrical moment of inertia Iz [mm4]	7070
Moment of resistance Wby [mm3]	8300
Moment of resistance Wbz [mm3]	700
max. length	4000 mm

General properties

size	10-80
Design	Double Rail



Dimensions

H	20 mm
da	7.5 mm
a	70 mm
b	74 mm
h	5.5 mm
h1	5.5 mm
h2	11 mm
G1	27 mm
G2	17 mm
A1	25 mm
Q1	26 mm
Q2	21 mm
k1 thread	M6
dr	6.7 mm
Weight	1412 g
a1	40 mm

Certificates and standards

