
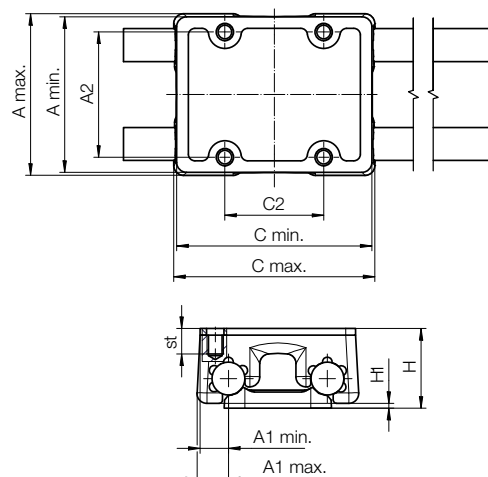


drylin® WW-10-30-T15-01-HYD1

Narrow linear carriage for food technology

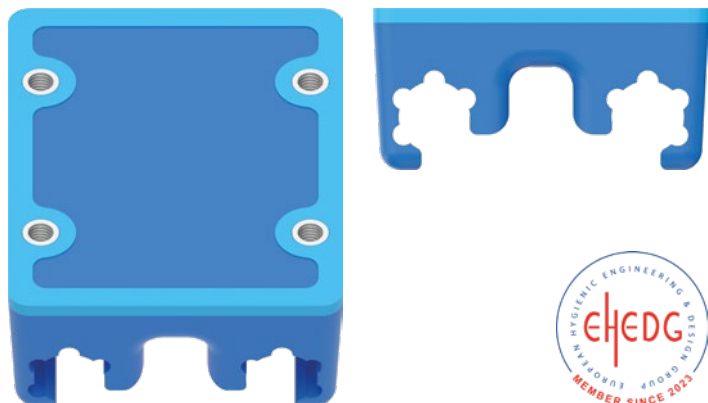

Bacteria and germs don't stand a chance

drylin® W linear carriages with hygienic design offer as little space as possible for bacteria and viruses. Thanks to consistent compliance with the EHEDG production guidelines, the linear carriages can be rinsed without any problems; there are no dead spaces and bevels and radii prevent dirt particles and germs from adhering.

- Surfaces can be rinsed, easy cleaning and germ-free design in a compact type
- The monoblock design can be slid onto the rail in one easy step and is ready for immediate use
- Tested service life: rail WS-10-40-ES-HYD2 in hygienic design, length 350mm, stroke length 270mm, carriage WW-10-40-T20-HYD1 in hygienic design, force 400N, horizontal installation position, speed 0.1m/s, acceleration 0.0143m/s², running performance: 278,000 double cycles.
- Simply wash off with water or use automated cleaning processes (high-pressure or sterilisation processes, dishwashers etc.)

Product range

Part No.	Designation	H [mm]	H1 [mm]	A1		st [mm]	K2	A2 [mm]	A		C2 [mm]	C	
				max. [mm]	min. [mm]				max. [mm]	min. [mm]		max. [mm]	min. [mm]
WW-10-30-T15-01-HYD1	Overhead carriage	24	1.5	8.6	7.6	7	M5	38	47.2	45.3	30	59.2	57.3

Part No.	Stat. load capacity			
	Coy [N]	Coz [N]	Mox [Nm]	Moy [Nm]
WW-10-30-T15-01-HYD1	35	17,5	0,5	0,6

