
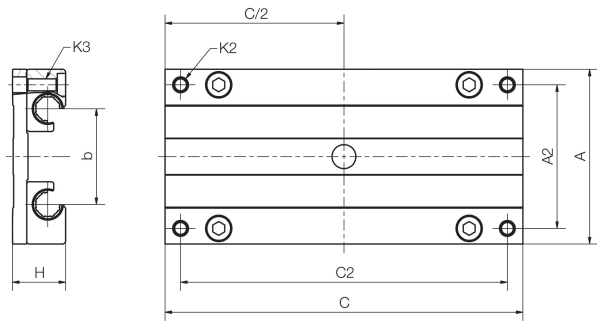


drylin W complete carriage WW-SL-HKA

WW-10-80-15-SL-HKA

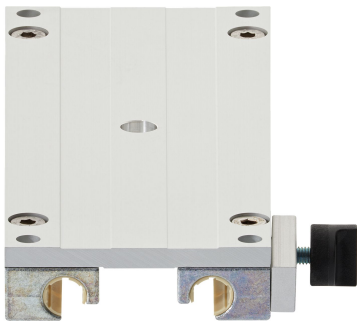

drylin W complete carriage WW-SL-HKA

- Design: round
- Material sliding element: iglidur J
- Camera carriage 3/8" threaded hole
- Material: Die-cast zinc

A2	94 mm
Thread K2	M6
H2	24 mm
C2	137 mm
A	107 mm
C	150 mm

Product description

Introducing the drylin® W complete carriage WW-SL-HKA, designed for smooth and reliable performance. Crafted from durable die-cast zinc, this round carriage features an iglidur® J sliding element for enhanced longevity. It includes a convenient 3/8" threaded hole, making it versatile for various applications. Experience the perfect blend of strength and functionality with this essential component from the drylin® family.

Manufacturing and installation tolerances

H2-Tolerance	±0,25 mm
--------------	----------

Mechanical properties

Static load capacity Coy	4800 N
Static load capacity Coz	2400 N
Static load capacity Mox	178 Nm
Static load capacity Moy	290 Nm
Static load capacity Moz	290 Nm

Dimensions

A	107 mm
C	150 mm
A2	94 mm
C2	137 mm
Thread K2	M6
H2	24 mm



General properties

size	10-80
Design	round
Sliding element material	iglidur® J

Certificates and standards

