


drylin W complete carriage WW-SL

WW-20-80-25-SL

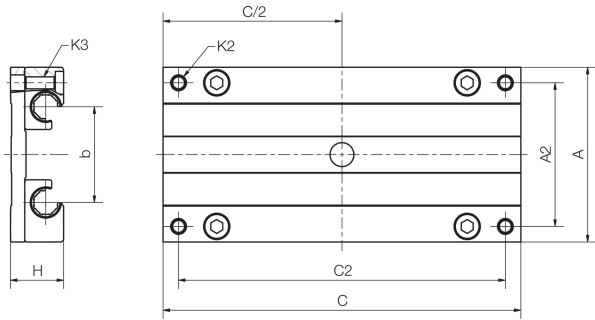

drylin W complete carriage WW-SL

- Camera carriage with $\varnothing$ 10mm plain hole
- Design: round
- Sliding element material: iglidur J
- Material: die-cast zinc
- Smooth movement
- Lubrication-free
- No flexing of the profile

A2	116 mm
Thread K2	M8
H2	44 mm
C2	232 mm
A	134 mm
C	250 mm

Product description

Introducing the drylin® W complete carriage WW-SL, designed for smooth operation and optimal image recordings, making it perfect for camera setups. This lubrication-free system features adjustable braking for customized control and is easy to assemble, ensuring a hassle-free experience. Enjoy almost silent operation without the distraction of balls, and rest assured there's no bending of the profile. Elevate your photography with this reliable and efficient carriage from igus.

Manufacturing and installation tolerances

H2-Tolerance	±0,25 mm
--------------	----------

Mechanical properties

Static load capacity Coy	12800 N
Static load capacity Coz	6400 N
Static load capacity Mox	525 Nm
Static load capacity Moy	1250 Nm
Static load capacity Moz	1250 Nm

Dimensions

A	134 mm
C	250 mm
A2	116 mm
C2	232 mm
Thread K2	M8
H2	44 mm



General properties

size	20-80
Design	round
Sliding element material	iglidur® J

Certificates and standards

