



drylin W complete carriage WWPV

WWPV-06-30-06

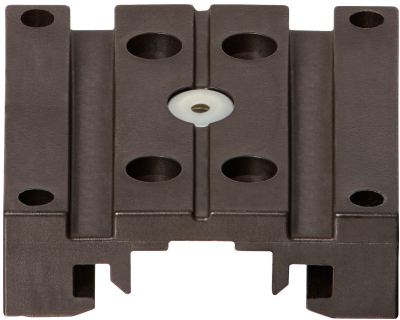

drylin W complete carriage WWPV

- Low weight due to use of aluminium and plastic
- Defined location points
- Integrated ball preloading in carriage
- Variable rail lengths

A2	45 mm
Thread K2	M4
C	60 mm
C2	51 mm
A	54 mm
H2	30 mm
Thread K3	Hexagonal design for M4 hexagon nut (ISO 4035)

Product description

Introducing the drylin W complete carriage WWPV, a lightweight solution crafted from durable aluminium and plastic. This innovative carriage features defined location points for precise positioning and integrated ball preloading for smooth operation. With variable rail lengths, it offers versatility to meet your specific needs. Experience efficiency and reliability with this exceptional product from the trusted drylin family.

Manufacturing and installation tolerances

H2-Tolerance	±0,25 mm
--------------	----------

Mechanical properties

Static load capacity Coy	100 N
Static load capacity Coz	50 N

General properties

size	06-30
Design	square



Dimensions

A	54 mm
C	60 mm
A2	45 mm
C2	51 mm
Thread K2	M4
H2	30 mm