


drylin® W pillow block WXUM-01-ES-FG

WXUM-01-10-ES-FG

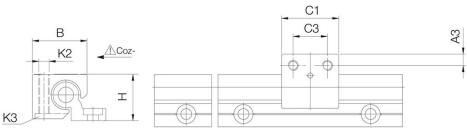

drylin® W pillow block WXUM-01-ES-FG

- Material: stainless steel 1.4408 precision casting
- Material sliding element: iglide® T500

Thread K3	M5
Thread K2	M6
B	26 mm
C1	29 mm
C3	16 mm
A3	6.5 mm

Product description

Introducing the drylin W pillow block WXUM-01-ES-FG, a robust solution designed for durability and performance. Crafted from stainless steel 1.4408 precision casting, it ensures long-lasting strength. The sliding element features iglide T500, offering smooth operation and reduced friction. This pillow block is perfect for a variety of applications, providing reliable support and efficiency in your projects. Upgrade your setup with the quality and innovation of drylin.

Mechanical properties

Static load capacity Coy	3800 N
Static load capacity Coz+	3800 N
Static load capacity Coz-	950 N
Preload housing	0 N

Dimensions

Floating bearing	none
A3	6.5 mm
B	26 mm
C1	29 mm
C3	16 mm
Thread K2	M6
Thread K3	M5



General properties

size	10
Design	round
Sliding element material	iglidur® X
Anti-Reflex	No