


drylin® R liner XUM-01

XUM-01-12

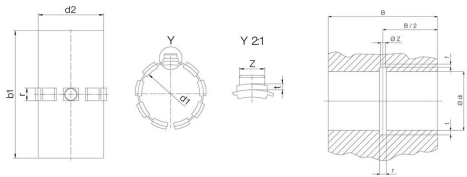

drylin® R liner XUM-01

- Material: iglidur® X
- Version: Enclosed, long design, high temperature
- Resistant to temperature and chemicals on stainless steel and chromed shafts

r	3 mm
Ø z	3 mm
Ø di	14 mm
B	32 mm
Ø d1	12 mm
t	0.8 mm
Ø d2	14 mm
b1	31 mm

Product description

Introducing the drylin R liner XUM-01 from the renowned brand igus. This high-quality liner is designed with an enclosed, long format, making it perfect for high-temperature applications. Crafted from iglidur X material, it boasts excellent resistance to temperature and chemicals, ensuring durability on stainless steel and chromed shafts. Elevate your projects with the reliability and performance of the drylin R liner XUM-01.

Requirements

Mould-resistant according to DIN EN ISO 846 Procedure A	Yes
---	-----

Physical properties

Max. long-term application temperature	250 °C
Lower application temperature	-100 °C

Manufacturing and installation tolerances

d1 tolerance	+0.030 +0.070mm
di tolerance	H7
B tolerance	h10
r1 tolerance	+0,05 mm
t1 tolerance	+0,1 mm
f1 tolerance	+0,5 mm



Dimensions

Ø d1	12 mm
Ø d2	14 mm
b1	31 mm
r	3 mm
t	0.8 mm
Ø z	3 mm
Ø di	14 mm
B	32 mm
t1	1 mm
f1	1.5 mm
Ø Z1	3.1 mm

Certificates and standards



Additional information and diagrams

