

Adaptor M8 male / M12 female A-cod.

4-pol. / 4-pol., conf. 1,2,3,4

Art.No.: 7000-88531-0000000

Weight: 0.015 kg

Country of origin: DE

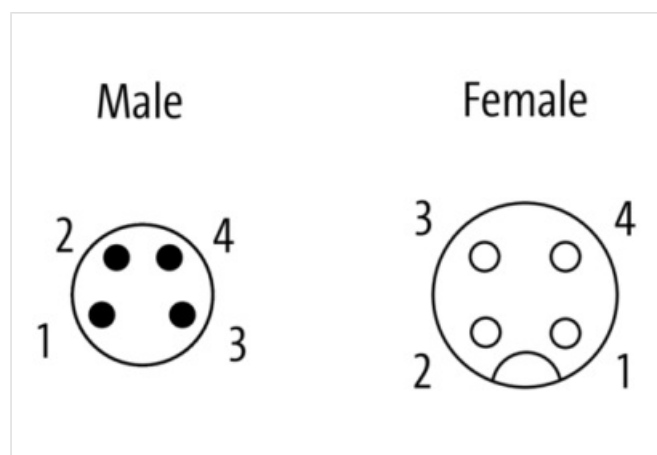
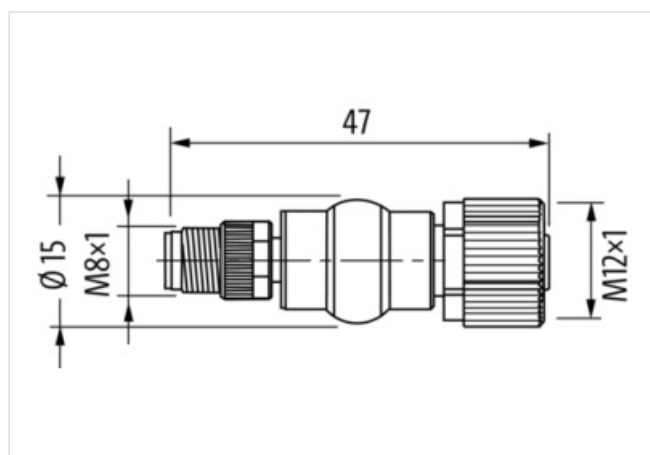
Model designation: MSB04L0-H-T

Adapter

Male - female

M8 – M12, 4-pole

for M8 distribution box 4-pole

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Family construction form	M12
Threaded hole	M12 x 1
Tightening torque	0,6 Nm

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-08

Murrelektronik GmbH | Grabenstraße 29 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Side 2

Family construction form	M8
Threaded hole	M8 x 1
Tightening torque	0,4 Nm

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-88531-0000000
GTIN	4048879118514
EU-Customs tariff number	85366990
US-Customs tariff number	8536694020
ECLASS-6.0	27143423
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440106
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440106
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
ETIM-9.0	EC001855
ETIM-10.0	EC001855
customs tariff number	85366990
EAN	4048879118514
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	30 V

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Rated insulation voltage	800 V

Mechanical data | Material data

housing	PUR
Locking material	Zinc die-casting
Coating locking	Nickel

Mechanical data | Mounting data

Mounting method	Schraubgewinde
-----------------	----------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.