



6 Port unmanaged Gigabit Switch 4 PoE 1 SFP Ports IP20 metal 48V

Art.No.: 58191
Weight: 0.350 kg
Country of origin: TW
Model designation: TREE 6TX 4PoE 1SFP GE 48V

6 Port Unmanaged IP20 PoE Gigabit Switch
48 V power supply
SFP contact holder

Link to Product

Illustration

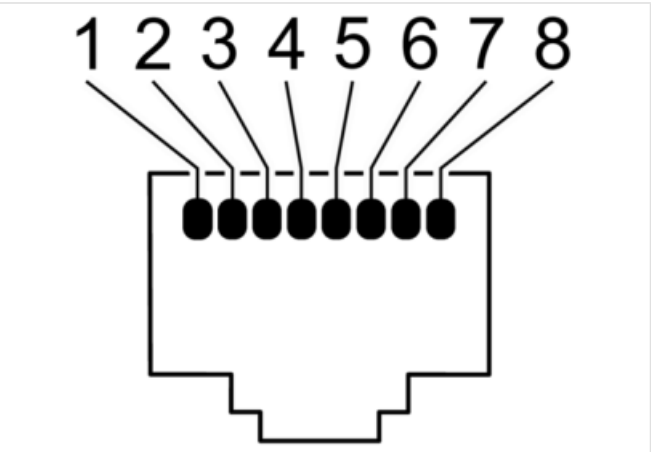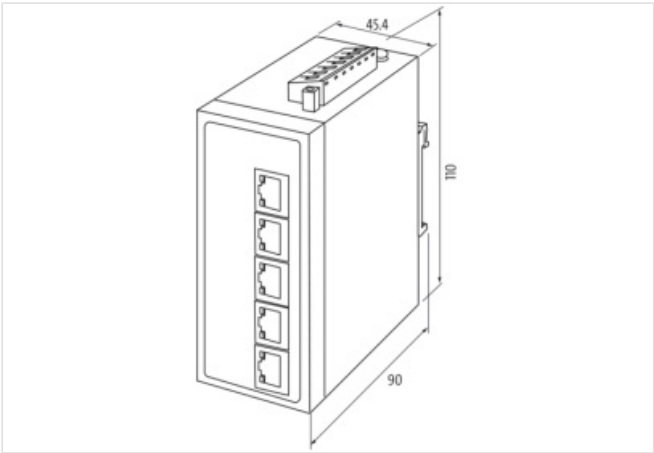

Product may differ from Image



Commercial data	
URL Webshop	https://shop.murrelektronik.com/58191
GTIN	4048879843683
EU-Customs tariff number	85176200
US-Customs tariff number	8517620090
ECLASS-6.1	19170106

ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170106
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-9.0	EC000734
ETIM-10.0	EC000734
customs tariff number	85176200
EAN	4048879843683
Packaging unit	1

Electrical data | Supply

Power consumption max.	7,2 W
PoE voltage amplifier	Yes

Industrial Communication

Data transmission rate max.	1.000 Mbit/s
-----------------------------	--------------

Industrial communication | Ethernet functionality

VLAN unmanaged (IEEE 802.1Q)	Yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	Yes
Auto-crossover	Yes

Diagnostics

Alarm contact	Yes
Diagnostic	No voltage
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Mechanical data | Material data

housing	Metal
Color housing	black

Mechanical data | Mounting data

Height	110 mm
Width	45,4 mm
Depth	89,6 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Ambient temperature (storage, transport)	-40 °C ... 85 °C

Connection type 3

Connection type 1	1
-------------------	---

Connection type 2	6
Connection type 3	X1
Family construction form	POF SC-RJ
No. of poles	2
Gender	female
Color contact carrier	black
PIN 1	RD
PIN 2	TD
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Family construction form	terminal
No. of poles	7
Gender	male
Color contact carrier	green
Connection	Plug-in terminals RK
PIN 1	V 2 +
PIN 2	V 2 -
PIN 3	Relay (NO)
PIN 4	Relay (NO)
PIN 5	V 1 +
PIN 6	V 1 -
PIN 7	FE