

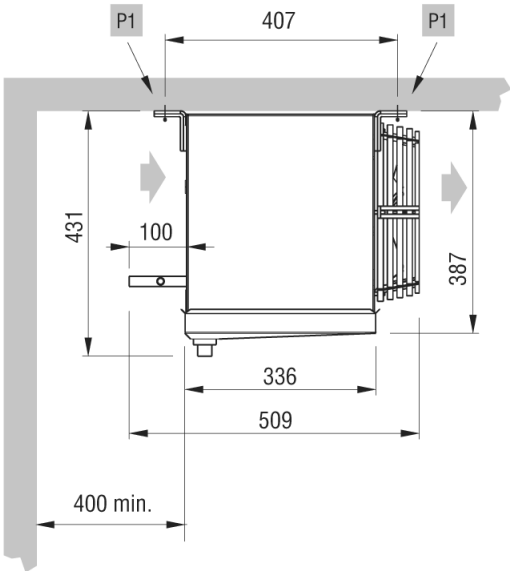


Inlet Air Temperature	[°C]	-22.00	Evaporating temperature	[°C]	-30.00
DT	[K]	8.00	Refrigerant		CO2
Minimum number of units in room		0	Altitude	[m]	0.0
Heat exchanger	Aluminium fin		Casing	Standard	
Fan motor feed	Standard		Type of fan motor	AC motors	
Defrost	Electric				
Selected model:1 x CGC 252E8			ED		
Capacity	[kW]	2.40	Margin	[%]	0.0
DT	[K]	8.0	Tot. air flow	[m³/h]	1680.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	40 (5m)			

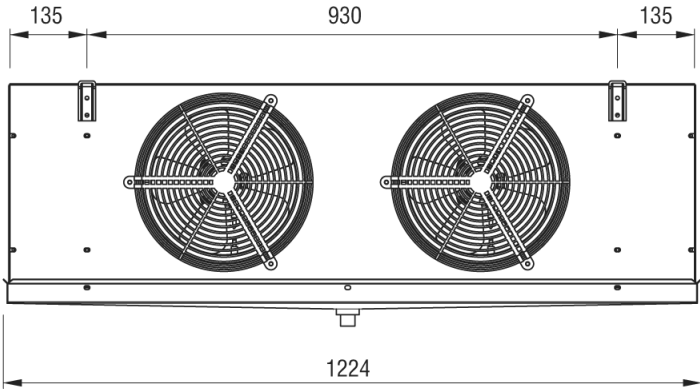

Weight	kg	25.000		[bar]	80
Internal surface	m²	0.92	External surface	m²	10.20
Inlet connection		12.7 mm	Output connection		12.7 mm
Total circuit capacity	dm³	2.1	Fin spacing	mm	8
Drain connection		1" GAS			
Defrost	ED		Electric	W	2250
Fan Motors	n.	2	Diameter	mm	250
Air flow	m³/h	1680	Air throw	m	8.0
Feed	V	230/1/50-60	Rotation speed	rpm	1300
Fan Motor	A	1.36	Absorbed power	W	190
Pres.S.Lev. 5 m.	dB(A)	40			