


Inlet Air Temperature	[°C]	-22.00	Evaporating temperature	[°C]	-30.00
DT	[K]	8.00	Refrigerant		CO2
Minimum number of units in room		0	Altitude	[m]	0.0
Heat exchanger	Aluminium fin		Casing	Standard	
Fan motor feed	Standard		Type of fan motor	AC motors	
Defrost	Electric				
Selected model:1 x CGC 353A8			ED		
Capacity	[kW]	11.57	Margin	[%]	0.0
DT	[K]	8.0	Tot. air flow	[m³/h]	7500.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	55 (5m)			

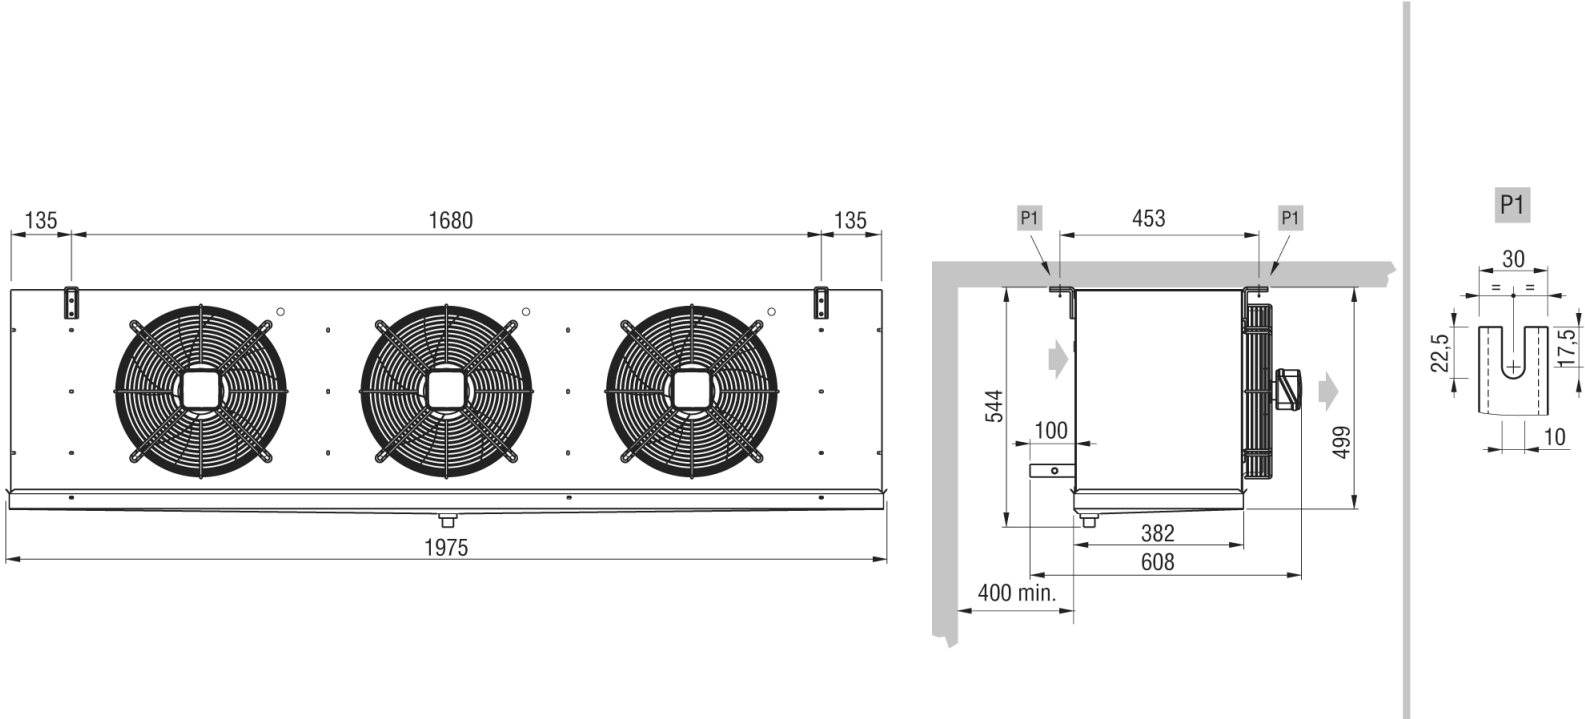

Weight	kg	67.000		[bar]	80
Internal surface	m²	3.36	External surface	m²	37.50
Inlet connection		12.7 mm	Output connection		22.2 mm
Total circuit capacity	dm³	7.9	Fin spacing	mm	8
Drain connection		1" GAS			
Defrost	ED		Electric	W	6300
Fan Motors	n.	3	Diameter	mm	350
Air flow	m³/h	7500	Air throw	m	17.0
Feed	V	230/1/50-60	Rotation speed	rpm	1450
Fan Motor	A	2.88	Absorbed power	W	555
Pres.S.Lev. 5 m.	dB(A)	55			