


Capacity	[KW]	7.00	Minimum Number Of Motor	1
Inlet Air Temperature	[°C]	0.00	Evaporating temperature	[°C] -8.00
DT	[K]	8.00	Refrigerant	CO2
Minimum number of units in room		0	Altitude	[m] 0.0
Heat exchanger	Aluminium fin		Casing	Standard
Fan motor feed	Standard		Type of fan motor	AC motors
Defrost	Absent			

Selected model:* 1 x CGS 34AH4

Capacity	[kW]	7.82	Margin	[%] 11.8
DT	[K]	7.2	Tot. air flow	[m³/h] 3920.0
Tot. Pres.S.Lev.	[dB(A) @[m]]	53 (5m)		

* Provide an appropriate defrosting system and number of defrost cycles

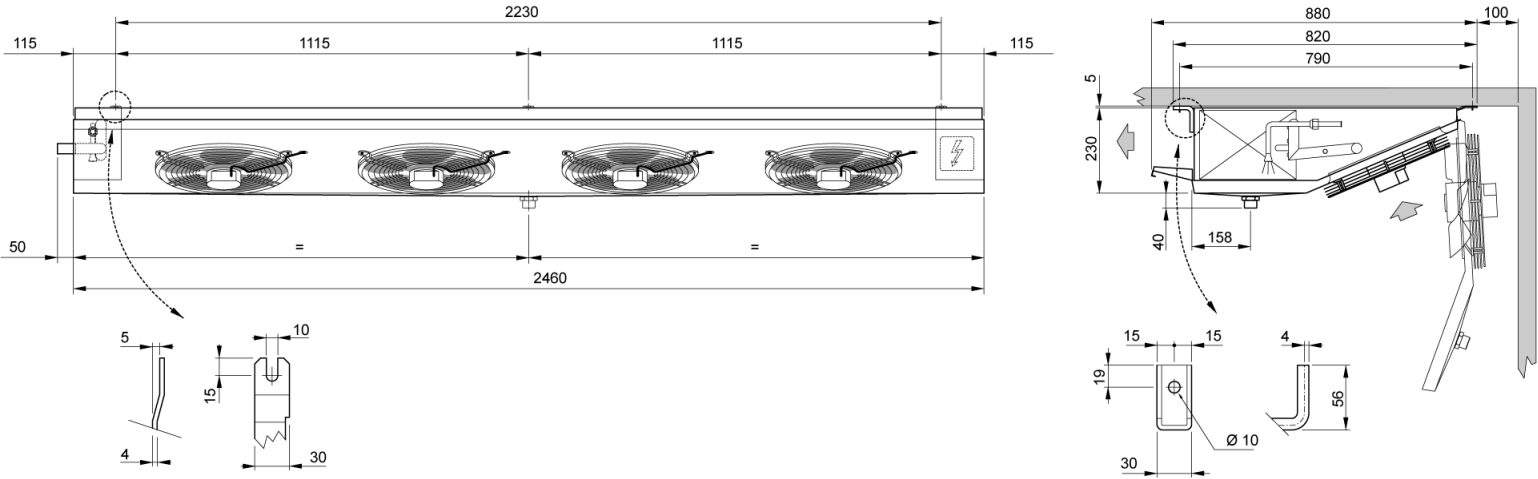

Weight	kg	62.000	PED Category	Cat I
			Design Pressure PS	[bar] 80
Internal surface	m²	2.00	External surface	m² 40.00
Inlet connection		12.7 mm	Output connection	15.9 mm
Total circuit capacity	dm³	4.4	Fin spacing	mm 4
Drain connection		1" GAS		
Fan Motors	n.	4	Diameter	mm 315
Air flow	m³/h	3920	Air throw	m 13.0
Feed	V		Rotation speed	rpm 1340
Fan Motor	A	1.72	Absorbed power	W 424
Pres.S.Lev. 5 m.	dB(A)	53		

* The safety requirements for the use of refrigerants must comply with the provisions of the EN378 standards and the safety data sheets of each fluid used. The risk assessment for the use of A2L mid-flammable refrigerants shall be conducted by the user based on site requirements

We shall not be liable for the performance and the quality of sold products, if fitted or connected fan motor speed regulation or control systems are different from the ones proposed or installed by us.

Heat exchanger

Aluminium fin

EUR 0.00

Casing

Standard

EUR 0.00

Fan motor feed

Standard

EUR 0.00

Type of fan motor

AC motors

EUR 0.00

Defrost

Absent

EUR 0.00

Base Price

EUR 0.00

Surcharge Water Version

EUR 0.00

Total Options

EUR 0.00

Total Price

EUR 0.00



* The safety requirements for the use of refrigerants must comply with the provisions of the EN378 standards and the safety data sheets of each fluid used. The risk assessment for the use of A2L mid-flammable refrigerants shall be conducted by the user based on site requirements

We shall not be liable for the performance and the quality of sold products, if fitted or connected fan motor speed regulation or control systems are different from the ones proposed or installed by us.