


# DIN 7973 — Raised Countersunk Head Tapping Screw with Slot



Catalogue data sheet · 10 sizes · category Bolts and Screws / Raised Head Screws · Source: Bufab public catalogue (bufab.com), compiled by cBallast 2026-09-15. Dimensions in mm unless stated. Confirm the controlling standard revision before procurement.

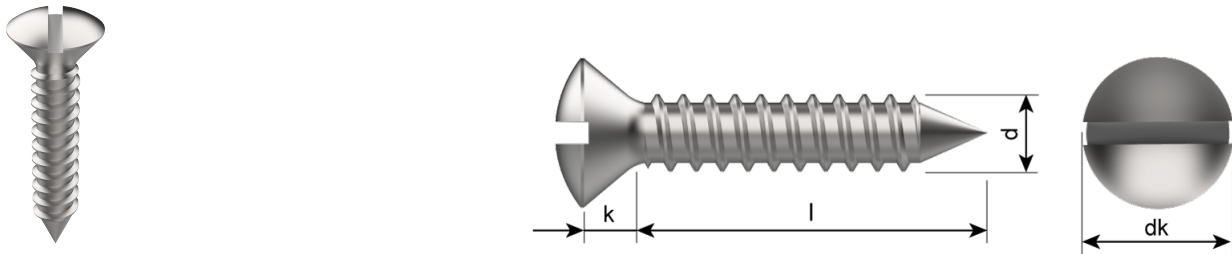

| Article no.  | Designation (Bufab)                                              | Material / class | Size        | Surface finish                   | Thread | Length | A/F | Head / outer Ø |
|--------------|------------------------------------------------------------------|------------------|-------------|----------------------------------|--------|--------|-----|----------------|
| 7973C290091  | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, CH   | CH               | ST2.9 x 9.5 | Zinc Bright Passivation Fe/Zn P1 | 2.9 mm | 9.5 mm |     | 5.5 mm         |
| 7973C290161  | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, CH   | CH               | ST2.9 x 16  | Zinc Bright Passivation Fe/Zn P1 | 2.9 mm | 16 mm  |     | 5.5 mm         |
| 7973C350131  | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, CH   | CH               | ST3.5 x 13  | Zinc Bright Passivation Fe/Zn P1 | 3.5 mm | 13 mm  |     | 6.8 mm         |
| 7973C420161  | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, CH   | CH               | ST4.2 x 16  | Zinc Bright Passivation Fe/Zn P1 | 4.2 mm | 16 mm  |     | 8.1 mm         |
| 7973C480251  | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, CH   | CH               | ST4.8 x 25  | Zinc Bright Passivation Fe/Zn P1 | 4.8 mm | 25 mm  |     | 9.5 mm         |
| 7973CA235013 | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, Stai | Stainless A2-20H | ST3.5 x 13  | Plain (no plating)               | 3.5 mm | 13 mm  |     | 6.8 mm         |
| 7973CA235025 | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, Stai | Stainless A2-20H | ST3.5 x 25  | Plain (no plating)               | 3.5 mm | 25 mm  |     | 6.8 mm         |
| 7973CA242013 | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, Stai | Stainless A2-20H | ST4.2 x 13  | Plain (no plating)               | 4.2 mm | 13 mm  |     | 8.1 mm         |
| 7973CA242019 | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, Stai | Stainless A2-20H | ST4.2 x 19  | Plain (no plating)               | 4.2 mm | 19 mm  |     | 8.1 mm         |
| 7973CA242025 | DIN 7973-C Raised Countersunk Head Tapping Screw with Slot, Stai | Stainless A2-20H | ST4.2 x 25  | Plain (no plating)               | 4.2 mm | 25 mm  |     | 8.1 mm         |

