

DIN 966-Z — Raised Countersunk Head Screw with Pozidriv

Catalogue data sheet · 121 sizes · category Bolts and Screws / Raised Head Screws · Source: Bufab public catalogue (bufab.com), compiled by cBallast 2026-09-15. Dimensions in mm unless stated. Confirm the controlling standard revision before procurement.



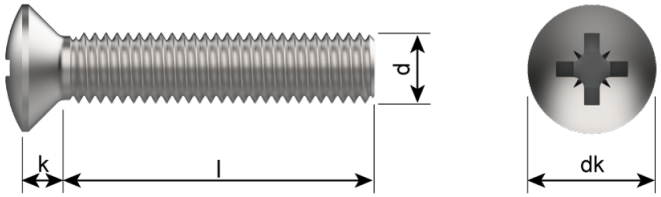

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
9660250041Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M2.5 x 4	Zinc Bright Passivation Fe/Zn P1	2.5 mm	4 mm		4.7 mm
9660250061Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M2.5 x 6	Zinc Bright Passivation Fe/Zn P1	2.5 mm	6 mm		4.7 mm
9660250101Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M2.5 x 10	Zinc Bright Passivation Fe/Zn P1	2.5 mm	10 mm		4.7 mm
966030061Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M3 x 6	Zinc Bright Passivation Fe/Zn P1	3 mm	6 mm		5.6 mm
966030081Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M3 x 8	Zinc Bright Passivation Fe/Zn P1	3 mm	8 mm		5.6 mm
966030101Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M3 x 10	Zinc Bright Passivation Fe/Zn P1	3 mm	10 mm		5.6 mm
966030121Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M3 x 12	Zinc Bright Passivation Fe/Zn P1	3 mm	12 mm		5.6 mm
966030141Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M3 x 14	Zinc Bright Passivation Fe/Zn P1	3 mm	14 mm		5.6 mm
966040051	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 5	Zinc Bright Passivation Fe/Zn P1	4 mm	5 mm		7.5 mm
966040061Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 6	Zinc Bright Passivation Fe/Zn P1	4 mm	6 mm		7.5 mm
966040081Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 8	Zinc Bright Passivation Fe/Zn P1	4 mm	8 mm		7.5 mm
966040101Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 10	Zinc Bright Passivation Fe/Zn P1	4 mm	10 mm		7.5 mm
966040121Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm		7.5 mm
966040161Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 16	Zinc Bright Passivation Fe/Zn P1	4 mm	16 mm		7.5 mm
966040191Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 19	Zinc Bright Passivation Fe/Zn P1	4 mm	19 mm		7.5 mm
966040201Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 20	Zinc Bright Passivation Fe/Zn P1	4 mm	20 mm		7.5 mm
966040251Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M4 x 25	Zinc Bright Passivation Fe/Zn P1	4 mm	25 mm		7.5 mm
966050101Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm		9.2 mm
966050121Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 12	Zinc Bright Passivation Fe/Zn P1	5 mm	12 mm		9.2 mm
966050141Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 14	Zinc Bright Passivation Fe/Zn P1	5 mm	14 mm		9.2 mm
966050161Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 16	Zinc Bright Passivation Fe/Zn P1	5 mm	16 mm		9.2 mm
966050221Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 22	Zinc Bright Passivation Fe/Zn P1	5 mm	22 mm		9.2 mm
966050301Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 30	Zinc Bright Passivation Fe/Zn P1	5 mm	30 mm		9.2 mm
966050401Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M5 x 40	Zinc Bright Passivation Fe/Zn P1	5 mm	40 mm		9.2 mm
966060101Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm		11 mm
966060161Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv,							

Steel 4.8

Steel 4.8	M6 x 16	Zinc Bright Passivation Fe/Zn P1	6 mm	16 mm	11 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
966060201Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm		11 mm
96606022Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 22	Plain (no plating)	6 mm	22 mm		11 mm
966060251Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 25	Zinc Bright Passivation Fe/Zn P1	6 mm	25 mm		11 mm
966060301Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 30	Zinc Bright Passivation Fe/Zn P1	6 mm	30 mm		11 mm
966060351Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 35	Zinc Bright Passivation Fe/Zn P1	6 mm	35 mm		11 mm
966060401Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 40	Zinc Bright Passivation Fe/Zn P1	6 mm	40 mm		11 mm
966060501Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Steel 4.8	Steel 4.8	M6 x 50	Zinc Bright Passivation Fe/Zn P1	6 mm	50 mm		11 mm
966A2025006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M2.5 x 6	Plain (no plating)	2.5 mm	6 mm		4.7 mm
966A2025008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M2.5 x 8	Plain (no plating)	2.5 mm	8 mm		4.7 mm
966A203005Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 5	Plain (no plating)	3 mm	5 mm		5.6 mm
966A203006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 6	Plain (no plating)	3 mm	6 mm		5.6 mm
966A203008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 8	Plain (no plating)	3 mm	8 mm		5.6 mm
966A203010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 10	Plain (no plating)	3 mm	10 mm		5.6 mm
966A203012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 12	Plain (no plating)	3 mm	12 mm		5.6 mm
966A203016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 16	Plain (no plating)	3 mm	16 mm		5.6 mm
966A203020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 20	Plain (no plating)	3 mm	20 mm		5.6 mm
966A203025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 25	Plain (no plating)	3 mm	25 mm		5.6 mm
966A203030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M3 x 30	Plain (no plating)	3 mm	30 mm		5.6 mm
966A204006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 6	Plain (no plating)	4 mm	6 mm		7.5 mm
966A204008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 8	Plain (no plating)	4 mm	8 mm		7.5 mm
966A204010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 10	Plain (no plating)	4 mm	10 mm		7.5 mm
966A204012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm		7.5 mm
966A204016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 16	Plain (no plating)	4 mm	16 mm		7.5 mm
966A204018Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 18	Plain (no plating)	4 mm	18 mm		7.5 mm
966A204020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 20	Plain (no plating)	4 mm	20 mm		7.5 mm
966A204025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 25	Plain (no plating)	4 mm	25 mm		7.5 mm
966A204030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 30	Plain (no plating)	4 mm	30 mm		7.5 mm
966A204035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 35	Plain (no plating)	4 mm	35 mm		7.5 mm
966A204040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 40	Plain (no plating)	4 mm	40 mm		7.5 mm
966A204060Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M4 x 60	Plain (no plating)	4 mm	60 mm		7.5 mm
966A205006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 6	Plain (no plating)	5 mm	6 mm		9.2 mm
966A205008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 8	Plain (no plating)	5 mm	8 mm		9.2 mm
966A205010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 10	Plain (no plating)	5 mm	10 mm		9.2 mm
966A205012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 12	Plain (no plating)	5 mm	12 mm		9.2 mm
966A205016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 16	Plain (no plating)	5 mm	16 mm		9.2 mm
966A205020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm		9.2 mm
966A205025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 25	Plain (no plating)	5 mm	25 mm		9.2 mm
966A205030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 30	Plain (no plating)	5 mm	30 mm		9.2 mm
966A205035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 35	Plain (no plating)	5 mm	35 mm		9.2 mm
966A205040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 40	Plain (no plating)	5 mm	40 mm		9.2 mm
966A205050Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M5 x 50	Plain (no plating)	5 mm	50 mm		9.2 mm
966A206010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 10	Plain (no plating)	6 mm	10 mm		11 mm
966A206012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 12	Plain (no plating)	6 mm	12 mm		11 mm
966A206016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 16	Plain (no plating)	6 mm	16 mm		11 mm
966A206020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 20	Plain (no plating)	6 mm	20 mm		11 mm
966A206025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv,							

Stainless

Stainless A2-70	M6 x 25	Plain (no plating)	6 mm	25 mm	11 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
966A206030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 30	Plain (no plating)	6 mm	30 mm		11 mm
966A206035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm		11 mm
966A206040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm		11 mm
966A206050Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm		11 mm
966A206070Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M6 x 70	Plain (no plating)	6 mm	70 mm		11 mm
966A208030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm		14.5 mm
966A208050Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A2-70	M8 x 50	Plain (no plating)	8 mm	50 mm		14.5 mm
966A4025006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M2.5 x 6	Plain (no plating)	2.5 mm	6 mm		4.7 mm
966A4025010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M2.5 x 10	Plain (no plating)	2.5 mm	10 mm		4.7 mm
966A403004Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 4	Plain (no plating)	3 mm	4 mm		5.6 mm
966A403005Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 5	Plain (no plating)	3 mm	5 mm		5.6 mm
966A403006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 6	Plain (no plating)	3 mm	6 mm		5.6 mm
966A403008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 8	Plain (no plating)	3 mm	8 mm		5.6 mm
966A403010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 10	Plain (no plating)	3 mm	10 mm		5.6 mm
966A403012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 12	Plain (no plating)	3 mm	12 mm		5.6 mm
966A403016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 16	Plain (no plating)	3 mm	16 mm		5.6 mm
966A403020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 20	Plain (no plating)	3 mm	20 mm		5.6 mm
966A403030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M3 x 30	Plain (no plating)	3 mm	30 mm		5.6 mm
966A404005Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 5	Plain (no plating)	4 mm	5 mm		7.5 mm
966A404008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 8	Plain (no plating)	4 mm	8 mm		7.5 mm
966A404010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 10	Plain (no plating)	4 mm	10 mm		7.5 mm
966A404012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 12	Plain (no plating)	4 mm	12 mm		7.5 mm
966A404016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 16	Plain (no plating)	4 mm	16 mm		7.5 mm
966A404018Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 18	Plain (no plating)	4 mm	18 mm		7.5 mm
966A404020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 20	Plain (no plating)	4 mm	20 mm		7.5 mm
966A404025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 25	Plain (no plating)	4 mm	25 mm		7.5 mm
966A404030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 30	Plain (no plating)	4 mm	30 mm		7.5 mm
966A404035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 35	Plain (no plating)	4 mm	35 mm		7.5 mm
966A404040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M4 x 40	Plain (no plating)	4 mm	40 mm		7.5 mm
966A405006Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 6	Plain (no plating)	5 mm	6 mm		9.2 mm
966A405008Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 8	Plain (no plating)	5 mm	8 mm		9.2 mm
966A405010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 10	Plain (no plating)	5 mm	10 mm		9.2 mm
966A405012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 12	Plain (no plating)	5 mm	12 mm		9.2 mm
966A405016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 16	Plain (no plating)	5 mm	16 mm		9.2 mm
966A405020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 20	Plain (no plating)	5 mm	20 mm		9.2 mm
966A405025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 25	Plain (no plating)	5 mm	25 mm		9.2 mm
966A405030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 30	Plain (no plating)	5 mm	30 mm		9.2 mm
966A405035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 35	Plain (no plating)	5 mm	35 mm		9.2 mm
966A405040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M5 x 40	Plain (no plating)	5 mm	40 mm		9.2 mm
966A406010Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 10	Plain (no plating)	6 mm	10 mm		11 mm
966A406012Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 12	Plain (no plating)	6 mm	12 mm		11 mm
966A406016Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 16	Plain (no plating)	6 mm	16 mm		11 mm
966A406020Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 20	Plain (no plating)	6 mm	20 mm		11 mm
966A406025Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm		11 mm
966A406030Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 30	Plain (no plating)	6 mm	30 mm		11 mm
966A406035Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv,							

Stainless

Stainless A4-70	M6 x 35	Plain (no plating)	6 mm	35 mm	11 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
966A406040Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 40	Plain (no plating)	6 mm	40 mm		11 mm
966A406050Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 50	Plain (no plating)	6 mm	50 mm		11 mm
966A406060Z	DIN 966-Z Raised Countersunk Head Screw with Pozidriv, Stainless	Stainless A4-70	M6 x 60	Plain (no plating)	6 mm	60 mm		11 mm