

ISO 7380-1 — Button Head with Hex Drive

Catalogue data sheet · 792 sizes · category Bolts and Screws / Socket Head Screws · Source: Bufab public catalogue (bufab.com), compiled by cBallast 2026-09-15. Dimensions in mm unless stated. Confirm the controlling standard revision before procurement.



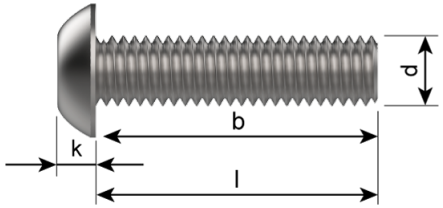



Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73800050351	ISO 7380-1 Button Head with Hex Drive, Steel 4.8, 04.8 M5 x 35	Steel 4.8	04.8 M5 x 35	Zinc Bright Passivation Fe/Zn P1	5 mm	35 mm	3 mm	9.5 mm
73801002003	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2 x 3	Steel 10.9	010.9 M2 x 3	Plain (no plating)	2 mm	3 mm	1.3 mm	3.5 mm
73801002004	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2 x 4	Steel 10.9	010.9 M2 x 4	Plain (no plating)	2 mm	4 mm	1.3 mm	3.5 mm
738010020051	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2 x 5	Steel 10.9	010.9 M2 x 5	Zinc Bright Passivation Fe/Zn P1	2 mm	5 mm	1.3 mm	3.5 mm
73801002006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2 x 6	Steel 10.9	010.9 M2 x 6	Plain (no plating)	2 mm	6 mm	1.3 mm	3.5 mm
738010020081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2 x 8	Steel 10.9	010.9 M2 x 8	Zinc Bright Passivation Fe/Zn P1	2 mm	8 mm	1.3 mm	3.5 mm
738010025003	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2.5 x	Steel 10.9	010.9 M2.5 x 3	Plain (no plating)	2.5 mm	3 mm	1.5 mm	4.5 mm
738010025004	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2.5 x	Steel 10.9	010.9 M2.5 x 4	Plain (no plating)	2.5 mm	4 mm	1.5 mm	4.5 mm
7380100250051	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2.5 x	Steel 10.9	010.9 M2.5 x 5	Zinc Bright Passivation Fe/Zn P1	2.5 mm	5 mm	1.5 mm	4.5 mm
738010025006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2.5 x	Steel 10.9	010.9 M2.5 x 6	Plain (no plating)	2.5 mm	6 mm	1.5 mm	4.5 mm
7380100250061	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M2.5 x	Steel 10.9	010.9 M2.5 x 6	Zinc Bright Passivation Fe/Zn P1	2.5 mm	6 mm	1.5 mm	4.5 mm
73801003004	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 4, Plain	Steel 10.9	M3 x 4	Plain (no plating)	3 mm	4 mm	2 mm	5.7 mm
738010030041	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 4, Zinc	Steel 10.9	M3 x 4	Zinc Bright Passivation Fe/Zn P1	3 mm	4 mm	2 mm	5.7 mm
73801003005	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 5, Plain	Steel 10.9	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
738010030051	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 5, Zinc	Steel 10.9	M3 x 5	Zinc Bright Passivation Fe/Zn P1	3 mm	5 mm	2 mm	5.7 mm
73801003006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 6, Plain	Steel 10.9	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
738010030061	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 6, Zinc	Steel 10.9	M3 x 6	Zinc Bright Passivation Fe/Zn P1	3 mm	6 mm	2 mm	5.7 mm
73801003008	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 8, Plain	Steel 10.9	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm
738010030081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 8, Zinc	Steel 10.9	M3 x 8	Zinc Bright Passivation Fe/Zn P1	3 mm	8 mm	2 mm	5.7 mm
73801003010	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 10, Plai	Steel 10.9	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	5.7 mm
738010030101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 10, Zinc	Steel 10.9	M3 x 10	Zinc Bright Passivation Fe/Zn P1	3 mm	10 mm	2 mm	5.7 mm
73801003012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 12, Plai	Steel 10.9	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
738010030121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 12, Zinc	Steel 10.9	M3 x 12	Zinc Bright Passivation Fe/Zn P1	3 mm	12 mm	2 mm	5.7 mm
73801003014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 14, Plai	Steel 10.9	M3 x 14	Plain (no plating)	3 mm	14 mm	2 mm	5.7 mm
738010030141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 14, Zinc	Steel 10.9	M3 x 14	Zinc Bright Passivation Fe/Zn P1	3 mm	14 mm	2 mm	5.7 mm
73801003016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x							

16, Plai

Steel 10.9	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
738010030161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 16, Zinc	Steel 10.9	M3 x 16	Zinc Bright Passivation Fe/Zn P1	3 mm	16 mm	2 mm	5.7 mm
73801003018	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 18, Plai	Steel 10.9	M3 x 18	Plain (no plating)	3 mm	18 mm	2 mm	5.7 mm
73801003020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 20, Plai	Steel 10.9	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	5.7 mm
738010030201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 20, Zinc	Steel 10.9	M3 x 20	Zinc Bright Passivation Fe/Zn P1	3 mm	20 mm	2 mm	5.7 mm
73801003025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 25, Plai	Steel 10.9	M3 x 25	Plain (no plating)	3 mm	25 mm	2 mm	5.7 mm
738010030251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 25, Zinc	Steel 10.9	M3 x 25	Zinc Bright Passivation Fe/Zn P1	3 mm	25 mm	2 mm	5.7 mm
73801003030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 30, Plai	Steel 10.9	M3 x 30	Plain (no plating)	3 mm	30 mm	2 mm	5.7 mm
738010030301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M3 x 30, Zinc	Steel 10.9	M3 x 30	Zinc Bright Passivation Fe/Zn P1	3 mm	30 mm	2 mm	5.7 mm
73801004005	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 5	Steel 10.9	010.9 M4 x 5	Plain (no plating)	4 mm	5 mm	2.5 mm	7.5 mm
738010040051	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 5	Steel 10.9	010.9 M4 x 5	Zinc Bright Passivation Fe/Zn P1	4 mm	5 mm	2.5 mm	7.5 mm
73801004006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 6	Steel 10.9	010.9 M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	7.5 mm
738010040061	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 6	Steel 10.9	010.9 M4 x 6	Zinc Bright Passivation Fe/Zn P1	4 mm	6 mm	2.5 mm	7.5 mm
73801004008	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 8	Steel 10.9	010.9 M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
738010040081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 8	Steel 10.9	010.9 M4 x 8	Zinc Bright Passivation Fe/Zn P1	4 mm	8 mm	2.5 mm	7.5 mm
738010040081F	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 8	Steel 10.9	010.9 M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
73801004010	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 10	Steel 10.9	010.9 M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
738010040101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 10	Steel 10.9	010.9 M4 x 10	Zinc Bright Passivation Fe/Zn P1	4 mm	10 mm	2.5 mm	7.5 mm
73801004012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
738010040121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm	2.5 mm	7.5 mm
738010040121F	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
738010040121FL	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm	2.5 mm	7.5 mm
738010040121SST096W	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm	2.5 mm	7.5 mm
73801004012NB	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 12	Steel 10.9	010.9 M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
73801004014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 14	Steel 10.9	010.9 M4 x 14	Plain (no plating)	4 mm	14 mm	2.5 mm	7.5 mm
738010040141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 14	Steel 10.9	010.9 M4 x 14	Zinc Bright Passivation Fe/Zn P1	4 mm	14 mm	2.5 mm	7.5 mm
73801004016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 16	Steel 10.9	010.9 M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	7.5 mm
738010040161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 16	Steel 10.9	010.9 M4 x 16	Zinc Bright Passivation Fe/Zn P1	4 mm	16 mm	2.5 mm	7.5 mm
73801004018	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 18	Steel 10.9	010.9 M4 x 18	Plain (no plating)	4 mm	18 mm	2.5 mm	7.5 mm
73801004020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 20	Steel 10.9	010.9 M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	7.5 mm
738010040201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 20	Steel 10.9	010.9 M4 x 20	Zinc Bright Passivation Fe/Zn P1	4 mm	20 mm	2.5 mm	7.5 mm
738010040201SST200	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 20	Steel 10.9	010.9 M4 x 20	Zinc Bright Passivation Fe/Zn P1	4 mm	20 mm	2.5 mm	7.5 mm
73801004022	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 22	Steel 10.9	010.9 M4 x 22	Plain (no plating)	4 mm	22 mm	2.5 mm	7.5 mm
73801004025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 25	Steel 10.9	010.9 M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	7.5 mm
738010040251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 25	Steel 10.9	010.9 M4 x 25	Zinc Bright Passivation Fe/Zn P1	4 mm	25 mm	2.5 mm	7.5 mm
73801004030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 30	Steel 10.9	010.9 M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	7.5 mm
738010040301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 30	Steel 10.9	010.9 M4 x 30	Zinc Bright Passivation Fe/Zn P1	4 mm	30 mm	2.5 mm	7.5 mm
73801004035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 35	Steel 10.9	010.9 M4 x 35	Plain (no plating)	4 mm	35 mm	2.5 mm	7.5 mm
738010040351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 35	Steel 10.9	010.9 M4 x 35	Zinc Bright Passivation Fe/Zn P1	4 mm	35 mm	2.5 mm	7.5 mm
73801004040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 40	Steel 10.9	010.9 M4 x 40	Plain (no plating)	4 mm	40 mm	2.5 mm	7.5 mm
738010040401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 40	Steel 10.9	010.9 M4 x 40	Zinc Bright Passivation Fe/Zn P1	4 mm	40 mm	2.5 mm	7.5 mm
73801004050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 50	Steel 10.9	010.9 M4 x 50	Plain (no plating)	4 mm	50 mm	2.5 mm	7.5 mm
738010040501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M4 x 50	Steel 10.9	010.9 M4 x 50	Zinc Bright Passivation Fe/Zn P1	4 mm	50 mm	2.5 mm	7.5 mm
73801005004	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 4	Steel 10.9	010.9 M5 x 4	Plain (no plating)	5 mm	4 mm	3 mm	9.5 mm
7380100500451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 4	Steel 10.9	010.9 M5 x 4.5	Zinc Bright Passivation Fe/Zn P1	5 mm	4.5 mm	3 mm	9.5 mm
73801005006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 6	Steel 10.9	010.9 M5 x 6	Plain (no plating)	5 mm	6 mm	3 mm	9.5 mm
738010050061	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9							

M5 x 6,

Steel 10.9	010.9 M5 x 6	Zinc Bright Passivation Fe/Zn P1	5 mm	6 mm	3 mm	9.5 mm	

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73801005008	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 8	Steel 10.9	010.9 M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	9.5 mm
738010050081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 8	Steel 10.9	010.9 M5 x 8	Zinc Bright Passivation Fe/Zn P1	5 mm	8 mm	3 mm	9.5 mm
73801005010	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 10	Steel 10.9	010.9 M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	9.5 mm
738010050101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 10	Steel 10.9	010.9 M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm	3 mm	9.5 mm
738010050101NP	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 10	Steel 10.9	010.9 M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm	3 mm	9.5 mm
738010050103	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 10	Steel 10.9	010.9 M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	9.5 mm
73801005012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 12	Steel 10.9	010.9 M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
738010050121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 12	Steel 10.9	010.9 M5 x 12	Zinc Bright Passivation Fe/Zn P1	5 mm	12 mm	3 mm	9.5 mm
73801005014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 14	Steel 10.9	010.9 M5 x 14	Plain (no plating)	5 mm	14 mm	3 mm	9.5 mm
738010050141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 14	Steel 10.9	010.9 M5 x 14	Zinc Bright Passivation Fe/Zn P1	5 mm	14 mm	3 mm	9.5 mm
738010050141SST0	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 14	Steel 10.9	010.9 M5 x 14	Zinc Bright Passivation Fe/Zn P1	5 mm	14 mm	3 mm	9.5 mm
73801005015	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 15	Steel 10.9	010.9 M5 x 15	Plain (no plating)	5 mm	15 mm	3 mm	9.5 mm
73801005016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 16	Steel 10.9	010.9 M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	9.5 mm
738010050161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 16	Steel 10.9	010.9 M5 x 16	Zinc Bright Passivation Fe/Zn P1	5 mm	16 mm	3 mm	9.5 mm
738010050181	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 18	Steel 10.9	010.9 M5 x 18	Zinc Bright Passivation Fe/Zn P1	5 mm	18 mm	3 mm	9.5 mm
73801005020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 20	Steel 10.9	010.9 M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	9.5 mm
738010050201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 20	Steel 10.9	010.9 M5 x 20	Zinc Bright Passivation Fe/Zn P1	5 mm	20 mm	3 mm	9.5 mm
73801005025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 25	Steel 10.9	010.9 M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
738010050251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 25	Steel 10.9	010.9 M5 x 25	Zinc Bright Passivation Fe/Zn P1	5 mm	25 mm	3 mm	9.5 mm
738010050251CR6	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 25	Steel 10.9	010.9 M5 x 25	Zinc Bright Passivation Fe/Zn P1	5 mm	25 mm	3 mm	9.5 mm
73801005030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 30	Steel 10.9	010.9 M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	9.5 mm
738010050301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 30	Steel 10.9	010.9 M5 x 30	Zinc Bright Passivation Fe/Zn P1	5 mm	30 mm	3 mm	9.5 mm
738010050301H	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 30/30	Steel 10.9	010.9 M5 x 30/30	Zinc Bright Passivation Fe/Zn P1	5 mm	30 mm	3 mm	9.5 mm
73801005035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 35	Steel 10.9	010.9 M5 x 35	Plain (no plating)	5 mm	35 mm	3 mm	9.5 mm
738010050351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 35	Steel 10.9	010.9 M5 x 35	Zinc Bright Passivation Fe/Zn P1	5 mm	35 mm	3 mm	9.5 mm
73801005040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 40	Steel 10.9	010.9 M5 x 40	Plain (no plating)	5 mm	40 mm	3 mm	9.5 mm
738010050401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 40	Steel 10.9	010.9 M5 x 40	Zinc Bright Passivation Fe/Zn P1	5 mm	40 mm	3 mm	9.5 mm
73801005040FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 40	Steel 10.9	010.9 M5 x 40/40	Plain (no plating)	5 mm	40 mm	3 mm	9.5 mm
738010050451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 45	Steel 10.9	010.9 M5 x 45	Zinc Bright Passivation Fe/Zn P1	5 mm	45 mm	3 mm	9.5 mm
738010050451FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 45	Steel 10.9	010.9 M5 x 45/45	Zinc Bright Passivation Fe/Zn P1	5 mm	45 mm	3 mm	9.5 mm
73801005050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 50	Steel 10.9	010.9 M5 x 50	Plain (no plating)	5 mm	50 mm	3 mm	9.5 mm
738010050501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 50	Steel 10.9	010.9 M5 x 50	Zinc Bright Passivation Fe/Zn P1	5 mm	50 mm	3 mm	9.5 mm
73801006006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 6	Steel 10.9	010.9 M6 x 6	Plain (no plating)	6 mm	6 mm	4 mm	10.5 mm
738010060061	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 6	Steel 10.9	010.9 M6 x 6	Zinc Bright Passivation Fe/Zn P1	6 mm	6 mm	4 mm	10.5 mm
73801006008	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 8	Steel 10.9	010.9 M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
738010060081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 8	Steel 10.9	010.9 M6 x 8	Zinc Bright Passivation Fe/Zn P1	6 mm	8 mm	4 mm	10.5 mm
73801006010	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 10	Steel 10.9	010.9 M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	10.5 mm
738010060101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 10	Steel 10.9	010.9 M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm	4 mm	10.5 mm
738010060101SST0	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 10	Steel 10.9	010.9 M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm	4 mm	10.5 mm
73801006012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 12	Steel 10.9	010.9 M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
738010060121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 12	Steel 10.9	010.9 M6 x 12	Zinc Bright Passivation Fe/Zn P1	6 mm	12 mm	4 mm	10.5 mm
73801006014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 14	Steel 10.9	010.9 M6 x 14	Plain (no plating)	6 mm	14 mm	4 mm	10.5 mm
738010060141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 14	Steel 10.9	010.9 M6 x 14	Zinc Bright Passivation Fe/Zn P1	6 mm	14 mm	4 mm	10.5 mm
738010060151	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 15	Steel 10.9	010.9 M6 x 15	Zinc Bright Passivation Fe/Zn P1	6 mm	15 mm	4 mm	10.5 mm
73801006016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 16	Steel 10.9	010.9 M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	10.5 mm
738010060161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 16							

M6 x 16

Steel 10.9	010.9 M6 x 16	Zinc Bright Passivation Fe/Zn P1	6 mm	16 mm	4 mm	10.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73801006016ZB	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 16	Steel 10.9	010.9 M6 x 16	Zinc Bright Passivation Fe/Zn P1	6 mm	16 mm	4 mm	10.5 mm
73801006018	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 18	Steel 10.9	010.9 M6 x 18	Plain (no plating)	6 mm	18 mm	4 mm	10.5 mm
738010060181	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 18	Steel 10.9	010.9 M6 x 18	Zinc Bright Passivation Fe/Zn P1	6 mm	18 mm	4 mm	10.5 mm
73801006020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 20	Steel 10.9	010.9 M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
738010060201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 20	Steel 10.9	010.9 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	10.5 mm
738010060201CR6	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 20	Steel 10.9	010.9 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	10.5 mm
738010060201SST0	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 20	Steel 10.9	010.9 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	10.5 mm
73801006022	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 22	Steel 10.9	010.9 M6 x 22	Plain (no plating)	6 mm	22 mm	4 mm	10.5 mm
738010060221	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 22	Steel 10.9	010.9 M6 x 22	Zinc Bright Passivation Fe/Zn P1	6 mm	22 mm	4 mm	10.5 mm
73801006025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 25	Steel 10.9	010.9 M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	10.5 mm
738010060251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 25	Steel 10.9	010.9 M6 x 25	Zinc Bright Passivation Fe/Zn P1	6 mm	25 mm	4 mm	10.5 mm
738010060251SST400	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 25	Steel 10.9	010.9 M6 x 25	Zinc Bright Passivation Fe/Zn P1	6 mm	25 mm	4 mm	10.5 mm
73801006030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 30	Steel 10.9	010.9 M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	10.5 mm
738010060301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 30	Steel 10.9	010.9 M6 x 30	Zinc Bright Passivation Fe/Zn P1	6 mm	30 mm	4 mm	10.5 mm
73801006035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 35	Steel 10.9	010.9 M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	10.5 mm
738010060351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 35	Steel 10.9	010.9 M6 x 35	Zinc Bright Passivation Fe/Zn P1	6 mm	35 mm	4 mm	10.5 mm
738010060351FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 35	Steel 10.9	010.9 M6 x 35/35	Zinc Bright Passivation Fe/Zn P1	6 mm	35 mm	4 mm	10.5 mm
738010060351SST400	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 35	Steel 10.9	010.9 M6 x 35	Zinc Bright Passivation Fe/Zn P1	6 mm	35 mm	4 mm	10.5 mm
73801006040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 40	Steel 10.9	010.9 M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	10.5 mm
738010060401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 40	Steel 10.9	010.9 M6 x 40	Zinc Bright Passivation Fe/Zn P1	6 mm	40 mm	4 mm	10.5 mm
73801006040FT1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 40	Steel 10.9	010.9 M6 x 40/40	Zinc Bright Passivation Fe/Zn P1	6 mm	40 mm	4 mm	10.5 mm
73801006040I	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 40	Steel 10.9	010.9 M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	10.5 mm
73801006045	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 45	Steel 10.9	010.9 M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	10.5 mm
738010060451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 45	Steel 10.9	010.9 M6 x 45	Zinc Bright Passivation Fe/Zn P1	6 mm	45 mm	4 mm	10.5 mm
738010060451FL	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 45	Steel 10.9	010.9 M6 x 45/45	Zinc Bright Passivation Fe/Zn P1	6 mm	45 mm	4 mm	10.5 mm
738010060451FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 45	Steel 10.9	010.9 M6 x 45/45	Zinc Bright Passivation Fe/Zn P1	6 mm	45 mm	4 mm	10.5 mm
73801006050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 50	Steel 10.9	010.9 M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
738010060501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 50	Steel 10.9	010.9 M6 x 50	Zinc Bright Passivation Fe/Zn P1	6 mm	50 mm	4 mm	10.5 mm
738010060501FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 50	Steel 10.9	010.9 M6 x 50/50	Zinc Bright Passivation Fe/Zn P1	6 mm	50 mm	4 mm	10.5 mm
738010060504	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 50	Steel 10.9	010.9 M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
73801006055	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 55	Steel 10.9	010.9 M6 x 55	Plain (no plating)	6 mm	55 mm	4 mm	10.5 mm
738010060551	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 55	Steel 10.9	010.9 M6 x 55	Zinc Bright Passivation Fe/Zn P1	6 mm	55 mm	4 mm	10.5 mm
73801006060	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 60	Steel 10.9	010.9 M6 x 60	Plain (no plating)	6 mm	60 mm	4 mm	10.5 mm
738010060601	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 60	Steel 10.9	010.9 M6 x 60	Zinc Bright Passivation Fe/Zn P1	6 mm	60 mm	4 mm	10.5 mm
73801006070	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 70	Steel 10.9	010.9 M6 x 70	Plain (no plating)	6 mm	70 mm	4 mm	10.5 mm
738010060701	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 70	Steel 10.9	010.9 M6 x 70	Zinc Bright Passivation Fe/Zn P1	6 mm	70 mm	4 mm	10.5 mm
73801006070FT1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 70	Steel 10.9	010.9 M6 x 70/70	Zinc Bright Passivation Fe/Zn P1	6 mm	70 mm	4 mm	10.5 mm
738010060801	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 80	Steel 10.9	010.9 M6 x 80	Zinc Bright Passivation Fe/Zn P1	6 mm	80 mm	4 mm	10.5 mm
738010080081	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 8	Steel 10.9	010.9 M8 x 8	Zinc Bright Passivation Fe/Zn P1	8 mm	8 mm	5 mm	14 mm
73801008010	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 10	Steel 10.9	010.9 M8 x 10	Plain (no plating)	8 mm	10 mm	5 mm	14 mm
738010080101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 10	Steel 10.9	010.9 M8 x 10	Zinc Bright Passivation Fe/Zn P1	8 mm	10 mm	5 mm	14 mm
738010080101I	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 10	Steel 10.9	010.9 M8 x 10	Zinc Bright Passivation Fe/Zn P1	8 mm	10 mm	5 mm	14 mm
73801008012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 12	Steel 10.9	010.9 M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	14 mm
738010080121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 12	Steel 10.9	010.9 M8 x 12	Zinc Bright Passivation Fe/Zn P1	8 mm	12 mm	5 mm	14 mm
73801008014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 14	Steel 10.9	010.9 M8 x 14	Plain (no plating)	8 mm	14 mm	5 mm	14 mm
738010080141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9							

M8 x 14

Steel 10.9	010.9 M8 x 14	Zinc Bright Passivation Fe/Zn P1	8 mm	14 mm	5 mm	14 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73801008016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 16	Steel 10.9	010.9 M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	14 mm
738010080161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 16	Steel 10.9	010.9 M8 x 16	Zinc Bright Passivation Fe/Zn P1	8 mm	16 mm	5 mm	14 mm
738010080161IFL	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 16	Steel 10.9	010.9 M8 x 16	Zinc Bright Passivation Fe/Zn P1	8 mm	16 mm	5 mm	14 mm
738010080161SST200	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 16	Steel 10.9	010.9 M8 x 16	Zinc Bright Passivation Fe/Zn P1	8 mm	16 mm	5 mm	14 mm
73801008018	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 18	Steel 10.9	010.9 M8 x 18	Plain (no plating)	8 mm	18 mm	5 mm	14 mm
738010080181	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 18	Steel 10.9	010.9 M8 x 18	Zinc Bright Passivation Fe/Zn P1	8 mm	18 mm	5 mm	14 mm
73801008020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 20	Steel 10.9	010.9 M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
738010080201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 20	Steel 10.9	010.9 M8 x 20	Zinc Bright Passivation Fe/Zn P1	8 mm	20 mm	5 mm	14 mm
738010080201SST200	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 20	Steel 10.9	010.9 M8 x 20	Zinc Bright Passivation Fe/Zn P1	8 mm	20 mm	5 mm	14 mm
738010080202	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 20, Hot	Steel 10.9	M8 x 20	HOT DIP GALVANIZED ISO FIT	8 mm	20 mm	5 mm	14 mm
73801008020I	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 20	Steel 10.9	010.9 M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
73801008022	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 22	Steel 10.9	010.9 M8 x 22	Plain (no plating)	8 mm	22 mm	5 mm	14 mm
738010080221	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 22	Steel 10.9	010.9 M8 x 22	Zinc Bright Passivation Fe/Zn P1	8 mm	22 mm	5 mm	14 mm
73801008025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 25	Steel 10.9	010.9 M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	14 mm
738010080251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 25	Steel 10.9	010.9 M8 x 25	Zinc Bright Passivation Fe/Zn P1	8 mm	25 mm	5 mm	14 mm
738010080251SST200	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 25	Steel 10.9	010.9 M8 x 25	Zinc Bright Passivation Fe/Zn P1	8 mm	25 mm	5 mm	14 mm
738010080251SST400	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 25	Steel 10.9	010.9 M8 x 25	Zinc Bright Passivation Fe/Zn P1	8 mm	25 mm	5 mm	14 mm
738010080252	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 25, Hot	Steel 10.9	M8 x 25	HOT DIP GALVANIZED ISO FIT	8 mm	25 mm	5 mm	14 mm
73801008025GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 25	Steel 10.9	010.9 M8 x 25	GEOMET 500A	8 mm	25 mm	5 mm	14 mm
73801008030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 30	Steel 10.9	010.9 M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	14 mm
738010080301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 30	Steel 10.9	010.9 M8 x 30	Zinc Bright Passivation Fe/Zn P1	8 mm	30 mm	5 mm	14 mm
738010080302	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 30, Hot	Steel 10.9	M8 x 30	HOT DIP GALVANIZED ISO FIT	8 mm	30 mm	5 mm	14 mm
73801008030GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 30	Steel 10.9	010.9 M8 x 30	GEOMET 500A	8 mm	30 mm	5 mm	14 mm
73801008035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 35	Steel 10.9	010.9 M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm
738010080351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 35	Steel 10.9	010.9 M8 x 35	Zinc Bright Passivation Fe/Zn P1	8 mm	35 mm	5 mm	14 mm
738010080352	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 35, Hot	Steel 10.9	M8 x 35	HOT DIP GALVANIZED ISO FIT	8 mm	35 mm	5 mm	14 mm
73801008040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 40	Steel 10.9	010.9 M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	14 mm
738010080401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 40	Steel 10.9	010.9 M8 x 40	Zinc Bright Chromating Fe/Zn C1	8 mm	40 mm	5 mm	14 mm
7380100804018SST96	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 40	Steel 10.9	010.9 M8 x 40	Zinc Bright Passivation Fe/Zn P1	8 mm	40 mm	5 mm	14 mm
738010080401FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 40	Steel 10.9	010.9 M8 x 40/40	Zinc Bright Passivation Fe/Zn P1	8 mm	40 mm	5 mm	14 mm
73801008045	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 45	Steel 10.9	010.9 M8 x 45	Plain (no plating)	8 mm	45 mm	5 mm	14 mm
738010080451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 45	Steel 10.9	010.9 M8 x 45	Zinc Bright Passivation Fe/Zn P1	8 mm	45 mm	5 mm	14 mm
738010080451SST400	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 45	Steel 10.9	010.9 M8 x 45	Zinc Bright Passivation Fe/Zn P1	8 mm	45 mm	5 mm	14 mm
73801008050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 50	Steel 10.9	010.9 M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	14 mm
738010080501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 50	Steel 10.9	010.9 M8 x 50	Zinc Bright Passivation Fe/Zn P1	8 mm	50 mm	5 mm	14 mm
738010080501FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 50	Steel 10.9	010.9 M8 x 50/50	Zinc Bright Passivation Fe/Zn P1	8 mm	50 mm	5 mm	14 mm
738010080502	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 50, Hot	Steel 10.9	M8 x 50	HOT DIP GALVANIZED ISO FIT	8 mm	50 mm	5 mm	14 mm
73801008050H1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 50	Steel 10.9	010.9 M8 x 50/50	Zinc Bright Passivation Fe/Zn P1	8 mm	50 mm	5 mm	14 mm
73801008055	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 55	Steel 10.9	010.9 M8 x 55	Plain (no plating)	8 mm	55 mm	5 mm	14 mm
738010080551	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 55	Steel 10.9	010.9 M8 x 55	Zinc Bright Passivation Fe/Zn P1	8 mm	55 mm	5 mm	14 mm
73801008055FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 55	Steel 10.9	010.9 M8 x 55/55	Plain (no plating)	8 mm	55 mm	5 mm	14 mm
73801008060	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 60	Steel 10.9	010.9 M8 x 60	Plain (no plating)	8 mm	60 mm	5 mm	14 mm
738010080601	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 60	Steel 10.9	010.9 M8 x 60	Zinc Bright Passivation Fe/Zn P1	8 mm	60 mm	5 mm	14 mm
738010080602	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 60, Hot	Steel 10.9	M8 x 60	HOT DIP GALVANIZED ISO FIT	8 mm	60 mm	5 mm	14 mm
73801008060H1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 60	Steel 10.9	010.9 M8 x 60/60	Zinc Bright Passivation Fe/Zn P1	8 mm	60 mm	5 mm	14 mm
73801008065	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9							

M8 x 65

Steel 10.9	010.9 M8 x 65	Plain (no plating)	8 mm	65 mm	5 mm	14 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
738010080651	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 65	Steel 10.9	010.9 M8 x 65	Zinc Bright Passivation Fe/Zn P1	8 mm	65 mm	5 mm	14 mm
73801008070	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 70	Steel 10.9	010.9 M8 x 70	Plain (no plating)	8 mm	70 mm	5 mm	14 mm
738010080701	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 70	Steel 10.9	010.9 M8 x 70	Zinc Bright Passivation Fe/Zn P1	8 mm	70 mm	5 mm	14 mm
738010080702	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 70, Hot	Steel 10.9	M8 x 70	HOT DIP GALVANIZED ISO FIT	8 mm	70 mm	5 mm	14 mm
738010080751	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 75	Steel 10.9	010.9 M8 x 75	Zinc Bright Passivation Fe/Zn P1	8 mm	75 mm	5 mm	14 mm
73801008080	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 80	Steel 10.9	010.9 M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	14 mm
738010080801	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 80	Steel 10.9	010.9 M8 x 80	Zinc Bright Passivation Fe/Zn P1	8 mm	80 mm	5 mm	14 mm
73801008080GEO5	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 80	Steel 10.9	010.9 M8 x 80	GEOMET 500B	8 mm	80 mm	5 mm	14 mm
73801008080H1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 80	Steel 10.9	010.9 M8 x 80/80	Zinc Bright Passivation Fe/Zn P1	8 mm	80 mm	5 mm	14 mm
738010080901	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 90	Steel 10.9	010.9 M8 x 90	Zinc Bright Passivation Fe/Zn P1	8 mm	90 mm	5 mm	14 mm
738010080902	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 90, Hot	Steel 10.9	M8 x 90	HOT DIP GALVANIZED ISO FIT	8 mm	90 mm	5 mm	14 mm
73801008100	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 100	Steel 10.9	010.9 M8 x 100	Plain (no plating)	8 mm	100 mm	5 mm	14 mm
738010081001	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M8 x 100	Steel 10.9	010.9 M8 x 100	Zinc Bright Passivation Fe/Zn P1	8 mm	100 mm	5 mm	14 mm
738010081002	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M8 x 100, Hot	Steel 10.9	M8 x 100	HOT DIP GALVANIZED ISO FIT	8 mm	100 mm	5 mm	14 mm
73801010012	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 12	Plain (no plating)	10 mm	12 mm	6 mm	17.5 mm
738010100121	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 12	Zinc Bright Passivation Fe/Zn P1	10 mm	12 mm	6 mm	17.5 mm
73801010014	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 14	Plain (no plating)	10 mm	14 mm	6 mm	17.5 mm
738010100141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 14	Zinc Bright Passivation Fe/Zn P1	10 mm	14 mm	6 mm	17.5 mm
73801010016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 16	Plain (no plating)	10 mm	16 mm	6 mm	17.5 mm
738010100161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 16	Zinc Bright Passivation Fe/Zn P1	10 mm	16 mm	6 mm	17.5 mm
738010100181	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 18	Zinc Bright Passivation Fe/Zn P1	10 mm	18 mm	6 mm	17.5 mm
73801010020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	17.5 mm
738010100201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 20	Zinc Bright Passivation Fe/Zn P1	10 mm	20 mm	6 mm	17.5 mm
73801010020GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 20	GEOMET 500A	10 mm	20 mm	6 mm	17.5 mm
73801010020ZB	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 20	Zinc Bright Passivation Fe/Zn P1	10 mm	20 mm	6 mm	17.5 mm
73801010022	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 22	Plain (no plating)	10 mm	22 mm	6 mm	17.5 mm
738010100221	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 22	Zinc Bright Passivation Fe/Zn P1	10 mm	22 mm	6 mm	17.5 mm
73801010025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	17.5 mm
738010100251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 2	Steel 10.9	010.9 M10 x 25	Zinc Bright Passivation Fe/Zn P1	10 mm	25 mm	6 mm	17.5 mm
738010100252	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 25, Hot	Steel 10.9	M10 x 25	HOT DIP GALVANIZED ISO FIT	10 mm	25 mm	6 mm	17.5 mm
73801010030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	17.5 mm
738010100301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 30	Zinc Bright Passivation Fe/Zn P1	10 mm	30 mm	6 mm	17.5 mm
738010100302	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 30, Hot	Steel 10.9	M10 x 30	HOT DIP GALVANIZED ISO FIT	10 mm	30 mm	6 mm	17.5 mm
73801010030GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 30	GEOMET 500A	10 mm	30 mm	6 mm	17.5 mm
73801010035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	17.5 mm
738010100351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 35	Zinc Bright Passivation Fe/Zn P1	10 mm	35 mm	6 mm	17.5 mm
738010100352	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 35, Hot	Steel 10.9	M10 x 35	HOT DIP GALVANIZED ISO FIT	10 mm	35 mm	6 mm	17.5 mm
73801010035GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 3	Steel 10.9	010.9 M10 x 35	GEOMET 500A	10 mm	35 mm	6 mm	17.5 mm
73801010040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 4	Steel 10.9	010.9 M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	17.5 mm
738010100401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 4	Steel 10.9	010.9 M10 x 40	Zinc Bright Passivation Fe/Zn P1	10 mm	40 mm	6 mm	17.5 mm
738010100402	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 40, Hot	Steel 10.9	M10 x 40	HOT DIP GALVANIZED ISO FIT	10 mm	40 mm	6 mm	17.5 mm
73801010040GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 4	Steel 10.9	010.9 M10 x 40	GEOMET 500A	10 mm	40 mm	6 mm	17.5 mm
73801010045	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 4	Steel 10.9	010.9 M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	17.5 mm
738010100451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 4	Steel 10.9	010.9 M10 x 45	Zinc Bright Passivation Fe/Zn P1	10 mm	45 mm	6 mm	17.5 mm
73801010050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 5	Steel 10.9	010.9 M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	17.5 mm
738010100501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9							

M10 x 5

Steel 10.9	010.9 M10 x 50	Zinc Bright Passivation Fe/Zn P1	10 mm	50 mm	6 mm	17.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
738010100502	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 50, Hot	Steel 10.9	M10 x 50	HOT DIP GALVANIZED ISO FIT	10 mm	50 mm	6 mm	17.5 mm
73801010055	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 5	Steel 10.9	010.9 M10 x 55	Plain (no plating)	10 mm	55 mm	6 mm	17.5 mm
738010100551	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 5	Steel 10.9	010.9 M10 x 55	Zinc Bright Passivation Fe/Zn P1	10 mm	55 mm	6 mm	17.5 mm
738010100552	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 55, Hot	Steel 10.9	M10 x 55	HOT DIP GALVANIZED ISO FIT	10 mm	55 mm	6 mm	17.5 mm
73801010055GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 5	Steel 10.9	010.9 M10 x 55	GEOMET 500A	10 mm	55 mm	6 mm	17.5 mm
73801010060	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 6	Steel 10.9	010.9 M10 x 60	Plain (no plating)	10 mm	60 mm	6 mm	17.5 mm
738010100601	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 6	Steel 10.9	010.9 M10 x 60	Zinc Bright Passivation Fe/Zn P1	10 mm	60 mm	6 mm	17.5 mm
738010100602	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 60, Hot	Steel 10.9	M10 x 60	HOT DIP GALVANIZED ISO FIT	10 mm	60 mm	6 mm	17.5 mm
73801010065	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 6	Steel 10.9	010.9 M10 x 65	Plain (no plating)	10 mm	65 mm	6 mm	17.5 mm
738010100651	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 6	Steel 10.9	010.9 M10 x 65	Zinc Bright Passivation Fe/Zn P1	10 mm	65 mm	6 mm	17.5 mm
73801010065H	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 6	Steel 10.9	010.9 M10 x 65/65	Plain (no plating)	10 mm	65 mm	6 mm	17.5 mm
73801010070	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 7	Steel 10.9	010.9 M10 x 70	Plain (no plating)	10 mm	70 mm	6 mm	17.5 mm
738010100701	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 7	Steel 10.9	010.9 M10 x 70	Zinc Bright Passivation Fe/Zn P1	10 mm	70 mm	6 mm	17.5 mm
738010100701FT	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 7	Steel 10.9	010.9 M10 x 70/70	Zinc Bright Passivation Fe/Zn P1	10 mm	70 mm	6 mm	17.5 mm
738010100702	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 70, Hot	Steel 10.9	M10 x 70	HOT DIP GALVANIZED ISO FIT	10 mm	70 mm	6 mm	17.5 mm
73801010075	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 7	Steel 10.9	010.9 M10 x 75	Plain (no plating)	10 mm	75 mm	6 mm	17.5 mm
738010100751	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 7	Steel 10.9	010.9 M10 x 75	Zinc Bright Passivation Fe/Zn P1	10 mm	75 mm	6 mm	17.5 mm
73801010080	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 8	Steel 10.9	010.9 M10 x 80	Plain (no plating)	10 mm	80 mm	6 mm	17.5 mm
738010100801	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 8	Steel 10.9	010.9 M10 x 80	Zinc Bright Passivation Fe/Zn P1	10 mm	80 mm	6 mm	17.5 mm
738010100802	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 80, Hot	Steel 10.9	M10 x 80	HOT DIP GALVANIZED ISO FIT	10 mm	80 mm	6 mm	17.5 mm
73801010090	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 9	Steel 10.9	010.9 M10 x 90	Plain (no plating)	10 mm	90 mm	6 mm	17.5 mm
738010100901	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 9	Steel 10.9	010.9 M10 x 90	Zinc Bright Passivation Fe/Zn P1	10 mm	90 mm	6 mm	17.5 mm
738010100902	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M10 x 90, Hot	Steel 10.9	M10 x 90	HOT DIP GALVANIZED ISO FIT	10 mm	90 mm	6 mm	17.5 mm
738010101001	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 100	Zinc Bright Passivation Fe/Zn P1	10 mm	100 mm	6 mm	17.5 mm
738010101101	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 110	Zinc Bright Passivation Fe/Zn P1	10 mm	110 mm	6 mm	17.5 mm
738010101201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 120	Zinc Bright Passivation Fe/Zn P1	10 mm	120 mm	6 mm	17.5 mm
738010101301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M10 x 1	Steel 10.9	010.9 M10 x 130	Zinc Bright Passivation Fe/Zn P1	10 mm	130 mm	6 mm	17.5 mm
738010120141	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 1	Steel 10.9	010.9 M12 x 14	Zinc Bright Passivation Fe/Zn P1	12 mm	14 mm	8 mm	21 mm
73801012016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 1	Steel 10.9	010.9 M12 x 16	Plain (no plating)	12 mm	16 mm	8 mm	21 mm
738010120161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 1	Steel 10.9	010.9 M12 x 16	Zinc Bright Passivation Fe/Zn P1	12 mm	16 mm	8 mm	21 mm
73801012020	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 2	Steel 10.9	010.9 M12 x 20	Plain (no plating)	12 mm	20 mm	8 mm	21 mm
738010120201	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 2	Steel 10.9	010.9 M12 x 20	Zinc Bright Passivation Fe/Zn P1	12 mm	20 mm	8 mm	21 mm
73801012020GEO5A	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 2	Steel 10.9	010.9 M12 x 20	GEOMET 500A	12 mm	20 mm	8 mm	21 mm
73801012025	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 2	Steel 10.9	010.9 M12 x 25	Plain (no plating)	12 mm	25 mm	8 mm	21 mm
738010120251	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 2	Steel 10.9	010.9 M12 x 25	Zinc Bright Passivation Fe/Zn P1	12 mm	25 mm	8 mm	21 mm
73801012030	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 3	Steel 10.9	010.9 M12 x 30	Plain (no plating)	12 mm	30 mm	8 mm	21 mm
738010120301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 3	Steel 10.9	010.9 M12 x 30	Zinc Bright Passivation Fe/Zn P1	12 mm	30 mm	8 mm	21 mm
738010120302	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 30, Hot	Steel 10.9	M12 x 30	HOT DIP GALVANIZED ISO FIT	12 mm	30 mm	8 mm	21 mm
738010120331	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 3	Steel 10.9	010.9 M12 x 33	Zinc Bright Passivation Fe/Zn P1	12 mm	33 mm	8 mm	21 mm
73801012035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 3	Steel 10.9	010.9 M12 x 35	Plain (no plating)	12 mm	35 mm	8 mm	21 mm
738010120351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 3	Steel 10.9	010.9 M12 x 35	Zinc Bright Passivation Fe/Zn P1	12 mm	35 mm	8 mm	21 mm
738010120352	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 35, Hot	Steel 10.9	M12 x 35	HOT DIP GALVANIZED ISO FIT	12 mm	35 mm	8 mm	21 mm
73801012040	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 4	Steel 10.9	010.9 M12 x 40	Plain (no plating)	12 mm	40 mm	8 mm	21 mm
738010120401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 4	Steel 10.9	010.9 M12 x 40	Zinc Bright Passivation Fe/Zn P1	12 mm	40 mm	8 mm	21 mm
738010120401SST1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 4	Steel 10.9	010.9 M12 x 40	Zinc Bright Passivation Fe/Zn P1	12 mm	40 mm	8 mm	21 mm
738010120402	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 20							

40, Hot

Steel 10.9	M12 x 40	HOT DIP GALVANIZED ISO FIT	12 mm	40 mm	8 mm	21 mm	

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73801012045	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 4	Steel 10.9	010.9 M12 x 45	Plain (no plating)	12 mm	45 mm	8 mm	21 mm
738010120451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 4	Steel 10.9	010.9 M12 x 45	Zinc Bright Passivation Fe/Zn P1	12 mm	45 mm	8 mm	21 mm
738010120452	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 45, Hot	Steel 10.9	M12 x 45	HOT DIP GALVANIZED ISO FIT	12 mm	45 mm	8 mm	21 mm
73801012050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 5	Steel 10.9	010.9 M12 x 50	Plain (no plating)	12 mm	50 mm	8 mm	21 mm
738010120501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 5	Steel 10.9	010.9 M12 x 50	Zinc Bright Passivation Fe/Zn P1	12 mm	50 mm	8 mm	21 mm
738010120502	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 50, Hot	Steel 10.9	M12 x 50	HOT DIP GALVANIZED ISO FIT	12 mm	50 mm	8 mm	21 mm
73801012050FT1	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 5	Steel 10.9	010.9 M12 x 50/50	Zinc Bright Passivation Fe/Zn P1	12 mm	50 mm	8 mm	21 mm
738010120552	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 55, Hot	Steel 10.9	M12 x 55	HOT DIP GALVANIZED ISO FIT	12 mm	55 mm	8 mm	21 mm
73801012060	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 6	Steel 10.9	010.9 M12 x 60	Plain (no plating)	12 mm	60 mm	8 mm	21 mm
738010120601	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 6	Steel 10.9	010.9 M12 x 60	Zinc Bright Passivation Fe/Zn P1	12 mm	60 mm	8 mm	21 mm
738010120602	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 60, Hot	Steel 10.9	M12 x 60	HOT DIP GALVANIZED ISO FIT	12 mm	60 mm	8 mm	21 mm
73801012065	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 6	Steel 10.9	010.9 M12 x 65	Plain (no plating)	12 mm	65 mm	8 mm	21 mm
738010120701	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 7	Steel 10.9	010.9 M12 x 70	Zinc Bright Passivation Fe/Zn P1	12 mm	70 mm	8 mm	21 mm
738010120702	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 70, Hot	Steel 10.9	M12 x 70	HOT DIP GALVANIZED ISO FIT	12 mm	70 mm	8 mm	21 mm
738010120752	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 75, Hot	Steel 10.9	M12 x 75	HOT DIP GALVANIZED ISO FIT	12 mm	75 mm	8 mm	21 mm
73801012080	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 8	Steel 10.9	010.9 M12 x 80	Plain (no plating)	12 mm	80 mm	8 mm	21 mm
738010120801	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 8	Steel 10.9	010.9 M12 x 80	Zinc Bright Passivation Fe/Zn P1	12 mm	80 mm	8 mm	21 mm
738010120802	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 80, Hot	Steel 10.9	M12 x 80	HOT DIP GALVANIZED ISO FIT	12 mm	80 mm	8 mm	21 mm
738010120901	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 9	Steel 10.9	010.9 M12 x 90	Zinc Bright Passivation Fe/Zn P1	12 mm	90 mm	8 mm	21 mm
738010120902	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M12 x 90, Hot	Steel 10.9	M12 x 90	HOT DIP GALVANIZED ISO FIT	12 mm	90 mm	8 mm	21 mm
73801012100	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 1	Steel 10.9	010.9 M12 x 100	Plain (no plating)	12 mm	100 mm	8 mm	21 mm
738010121001	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M12 x 1	Steel 10.9	010.9 M12 x 100	Zinc Bright Passivation Fe/Zn P1	12 mm	100 mm	8 mm	21 mm
738010160151	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 1	Steel 10.9	010.9 M16 x 15	Zinc Bright Passivation Fe/Zn P1	16 mm	15 mm	10 mm	28 mm
738010160301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 3	Steel 10.9	010.9 M16 x 30	Zinc Bright Passivation Fe/Zn P1	16 mm	30 mm	10 mm	28 mm
73801016035	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 3	Steel 10.9	010.9 M16 x 35	Plain (no plating)	16 mm	35 mm	10 mm	28 mm
738010160351	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 3	Steel 10.9	010.9 M16 x 35	Zinc Bright Passivation Fe/Zn P1	16 mm	35 mm	10 mm	28 mm
738010160352	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M16 x 35, Hot	Steel 10.9	M16 x 35	HOT DIP GALVANIZED ISO FIT	16 mm	35 mm	10 mm	28 mm
738010160401	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 4	Steel 10.9	010.9 M16 x 40	Zinc Bright Passivation Fe/Zn P1	16 mm	40 mm	10 mm	28 mm
738010160402	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M16 x 40, Hot	Steel 10.9	M16 x 40	HOT DIP GALVANIZED ISO FIT	16 mm	40 mm	10 mm	28 mm
738010160451	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 4	Steel 10.9	010.9 M16 x 45	Zinc Bright Passivation Fe/Zn P1	16 mm	45 mm	10 mm	28 mm
73801016050	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 5	Steel 10.9	010.9 M16 x 50	Plain (no plating)	16 mm	50 mm	10 mm	28 mm
738010160501	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 5	Steel 10.9	010.9 M16 x 50	Zinc Bright Passivation Fe/Zn P1	16 mm	50 mm	10 mm	28 mm
738010160502	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, M16 x 50, Hot	Steel 10.9	M16 x 50	HOT DIP GALVANIZED ISO FIT	16 mm	50 mm	10 mm	28 mm
738010160551	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 5	Steel 10.9	010.9 M16 x 55	Zinc Bright Passivation Fe/Zn P1	16 mm	55 mm	10 mm	28 mm
73801016060	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 6	Steel 10.9	010.9 M16 x 60	Plain (no plating)	16 mm	60 mm	10 mm	28 mm
738010160601	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 6	Steel 10.9	010.9 M16 x 60	Zinc Bright Passivation Fe/Zn P1	16 mm	60 mm	10 mm	28 mm
738010160651	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 6	Steel 10.9	010.9 M16 x 65	Zinc Bright Passivation Fe/Zn P1	16 mm	65 mm	10 mm	28 mm
738010160701	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 7	Steel 10.9	010.9 M16 x 70	Zinc Bright Passivation Fe/Zn P1	16 mm	70 mm	10 mm	28 mm
738010160801	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M16 x 8	Steel 10.9	010.9 M16 x 80	Zinc Bright Passivation Fe/Zn P1	16 mm	80 mm	10 mm	28 mm
73801203012	ISO 7380-1 Button Head with Hex Drive, Steel 12.9, M3 x 12, Plai	Steel 12.9	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
73801206016	ISO 7380-1 Button Head with Hex Drive, Steel 12.9, 012.9 M6 x 16	Steel 12.9	012.9 M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	10.5 mm
738021005016	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 16	Steel 10.9	010.9 M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	
7380210050161	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 16	Steel 10.9	010.9 M5 x 16	Zinc Bright Passivation Fe/Zn P1	5 mm	16 mm	3 mm	9.5 mm
7380210050301	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M5 x 30	Steel 10.9	010.9 M5 x 30	Zinc Bright Passivation Fe/Zn P1	5 mm	30 mm	3 mm	
738021006006	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9 M6 x 6	Steel 10.9	010.9 M6 x 6	Plain (no plating)	6 mm	6 mm	4 mm	10.5 mm
738021006008	ISO 7380-1 Button Head with Hex Drive, Steel 10.9, 010.9							

M6 x 8,

Steel 10.9	010.9 M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73808025061SST07	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8	Steel 8.8	08.8 M2.5 x 6	Zinc Bright Passivation Fe/Zn P1	2.5 mm	6 mm	1.5 mm	4.5 mm
2	M2.5 x 6							
73808030061SST14	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, M3 x 6,	Steel 8.8	M3 x 6	Zinc Bright Passivation Fe/Zn P1	3 mm	6 mm	2 mm	5.7 mm
4	SST 14							
73808040041	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 4	Zinc Bright Passivation Fe/Zn P1	4 mm	4 mm	2.5 mm	7.5 mm
	x 4, Z							
73808040081SST07	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 8	Zinc Bright Passivation Fe/Zn P1	4 mm	8 mm	2.5 mm	7.5 mm
2	x 8, S							
73808040101	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 10	Zinc Bright Passivation Fe/Zn P1	4 mm	10 mm	2.5 mm	7.5 mm
	x 10							
73808040121SST20	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm	2.5 mm	7.5 mm
0	x 12							
73808040201SST07	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 20	Zinc Bright Passivation Fe/Zn P1	4 mm	20 mm	2.5 mm	7.5 mm
2	x 20							
73808040251SST07	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M4	Steel 8.8	08.8 M4 x 25	Zinc Bright Passivation Fe/Zn P1	4 mm	25 mm	2.5 mm	7.5 mm
2	x 25							
73808050061	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M5	Steel 8.8	08.8 M5 x 6	Zinc Bright Passivation Fe/Zn P1	5 mm	6 mm	3 mm	9.5 mm
	x 6, Z							
7380805016	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M5	Steel 8.8	08.8 M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	9.5 mm
	x 16							
73808050161	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M5	Steel 8.8	08.8 M5 x 16	Zinc Bright Passivation Fe/Zn P1	5 mm	16 mm	3 mm	9.5 mm
	x 16							
73808050201SST07	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M5	Steel 8.8	08.8 M5 x 20	Zinc Bright Passivation Fe/Zn P1	5 mm	20 mm	3 mm	9.5 mm
2	x 20							
7380805025	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M5	Steel 8.8	08.8 M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
	x 25							
73808060081FT	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M6	Steel 8.8	08.8 M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
	x 8, P							
73808060121	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M6	Steel 8.8	08.8 M6 x 12	Zinc Bright Passivation Fe/Zn P1	6 mm	12 mm	4 mm	10.5 mm
	x 12							
7380806014	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M6	Steel 8.8	08.8 M6 x 14	Plain (no plating)	6 mm	14 mm	4 mm	10.5 mm
	x 14							
73808060201	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M6	Steel 8.8	08.8 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	10.5 mm
	x 20							
7380806050	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M6	Steel 8.8	08.8 M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
	x 50							
73808080351	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M8	Steel 8.8	08.8 M8 x 35	Zinc Bright Passivation Fe/Zn P1	8 mm	35 mm	5 mm	14 mm
	x 35							
7380808065	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8 M8	Steel 8.8	08.8 M8 x 65	Plain (no plating)	8 mm	65 mm	5 mm	14 mm
	x 65							
73808100141	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8	Steel 8.8	08.8 M10 x 14	Zinc Bright Passivation Fe/Zn P1	10 mm	14 mm	6 mm	17.5 mm
	M10 x 14							
73808100301	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8	Steel 8.8	08.8 M10 x 30	Zinc Bright Passivation Fe/Zn P1	10 mm	30 mm	6 mm	17.5 mm
	M10 x 30							
73808120301	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8	Steel 8.8	08.8 M12 x 30	Zinc Bright Passivation Fe/Zn P1	12 mm	30 mm	8 mm	21 mm
	M12 x 30							
73808120351	ISO 7380-1 Button Head with Hex Drive, Steel 8.8, 08.8	Steel 8.8	08.8 M12 x 35	Zinc Bright Passivation Fe/Zn P1	12 mm	35 mm	8 mm	21 mm
	M12 x 35							
7380A202003	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M2	Stainless A2	M2 x 3	Plain (no plating)	2 mm	3 mm	1.3 mm	3.5 mm
	x 3							
7380A202004	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M2	Stainless A2	M2 x 4	Plain (no plating)	2 mm	4 mm	1.3 mm	3.5 mm
	x 4							
7380A202004FL	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M2	Stainless A2	M2 x 4	Plain (no plating)	2 mm	4 mm	1.3 mm	3.5 mm
	x 4							
7380A202005	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 5	Plain (no plating)	2 mm	5 mm	1.3 mm	3.5 mm
	M2 x 5							
7380A202006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 6	Plain (no plating)	2 mm	6 mm	1.3 mm	3.5 mm
	M2 x 6							
7380A202008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 8	Plain (no plating)	2 mm	8 mm	1.3 mm	3.5 mm
	M2 x 8							
7380A202010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 10	Plain (no plating)	2 mm	10 mm	1.3 mm	3.5 mm
	M2 x 10							
7380A202012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 12	Plain (no plating)	2 mm	12 mm	1.3 mm	3.5 mm
	M2 x 12							
7380A202016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 16	Plain (no plating)	2 mm	16 mm	1.3 mm	3.5 mm
	M2 x 16							
7380A202020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2 x 20	Plain (no plating)	2 mm	20 mm	1.3 mm	3.5 mm
	M2 x 20							
7380A2025003	ISO 7380-1 Button Head with Hex Drive, Stainless A2,	Stainless A2	M2.5 x 3	Plain (no plating)	2.5 mm	3 mm	1.5 mm	4.5 mm
	M2.5 x 3							
7380A2025004	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 4	Plain (no plating)	2.5 mm	4 mm	1.5 mm	4.5 mm
	M2.5 x 4							
7380A2025005	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 5	Plain (no plating)	2.5 mm	5 mm	1.5 mm	4.5 mm
	M2.5 x 5							
7380A2025006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 6	Plain (no plating)	2.5 mm	6 mm	1.5 mm	4.5 mm
	M2.5 x 6							
7380A2025008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 8	Plain (no plating)	2.5 mm	8 mm	1.5 mm	4.5 mm
	M2.5 x 8							
7380A2025010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 10	Plain (no plating)	2.5 mm	10 mm	1.5 mm	4.5 mm
	M2.5 x 1							
7380A2025012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 12	Plain (no plating)	2.5 mm	12 mm	1.5 mm	4.5 mm
	M2.5 x 1							
7380A2025014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 14	Plain (no plating)	2.5 mm	14 mm	1.5 mm	4.5 mm
	M2.5 x 1							
7380A2025016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 16	Plain (no plating)	2.5 mm	16 mm	1.5 mm	4.5 mm
	M2.5 x 1							
7380A2025020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,	Stainless A2-70	M2.5 x 20	Plain (no plating)	2.5 mm	20 mm	1.5 mm	4.5 mm
	M2.5 x 2							
7380A203003	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M3	Stainless A2	M3 x 3	Plain (no plating)	3 mm	3 mm	2 mm	5.7 mm
	x 3							
7380A203004	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,							

M3 x 4

Stainless A2-70	M3 x 4	Plain (no plating)	3 mm	4 mm	2 mm	5.7 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A203005	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 5	Stainless A2-70	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
7380A20300570	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M3 x 5	Stainless A2	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
7380A203006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 6	Stainless A2-70	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
7380A203006C20	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M3 x 6	Stainless A2	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
7380A203008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 8	Stainless A2-70	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm
7380A20300870	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M3 x 8	Stainless A2	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm
7380A203010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 10	Stainless A2-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	5.7 mm
7380A20301070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 10	Stainless A2-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	5.7 mm
7380A203010PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 10	Stainless A2-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	5.7 mm
7380A203012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 12	Stainless A2-70	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
7380A20301270	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 12	Stainless A2-70	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
7380A203014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 14	Stainless A2-70	M3 x 14	Plain (no plating)	3 mm	14 mm	2 mm	5.7 mm
7380A203016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 16	Stainless A2-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A20301670	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 16	Stainless A2-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A203016PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 16	Stainless A2-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A203018	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 18	Stainless A2-70	M3 x 18	Plain (no plating)	3 mm	18 mm	2 mm	5.7 mm
7380A203020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 20	Stainless A2-70	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	5.7 mm
7380A20302070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 20	Stainless A2-70	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	5.7 mm
7380A203022	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 22	Stainless A2-70	M3 x 22	Plain (no plating)	3 mm	22 mm	2 mm	5.7 mm
7380A203025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 25	Stainless A2-70	M3 x 25	Plain (no plating)	3 mm	25 mm	2 mm	5.7 mm
7380A203030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 30	Stainless A2-70	M3 x 30	Plain (no plating)	3 mm	30 mm	2 mm	5.7 mm
7380A203035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 35	Stainless A2-70	M3 x 35	Plain (no plating)	3 mm	35 mm	2 mm	5.7 mm
7380A203040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 40	Stainless A2-70	M3 x 40	Plain (no plating)	3 mm	40 mm	2 mm	5.7 mm
7380A203050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M3 x 50	Stainless A2-70	M3 x 50	Plain (no plating)	3 mm	50 mm	2 mm	5.7 mm
7380A204004	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 4	Stainless A2-70	M4 x 4	Plain (no plating)	4 mm	4 mm	2.5 mm	7.5 mm
7380A204005	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 5	Stainless A2-70	M4 x 5	Plain (no plating)	4 mm	5 mm	2.5 mm	7.5 mm
7380A204006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 6	Stainless A2-70	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	7.5 mm
7380A204006W	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M4 x 6	Stainless A2	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	7.5 mm
7380A204008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 8	Stainless A2-70	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
7380A20400870	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M4 x 8	Stainless A2	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
7380A204010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 10	Stainless A2-70	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
7380A20401070	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M4 x 10	Stainless A2	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
7380A204012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 12	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
7380A20401270	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 12	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
7380A204012PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 12	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
7380A204014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 14	Stainless A2-70	M4 x 14	Plain (no plating)	4 mm	14 mm	2.5 mm	7.5 mm
7380A204016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 16	Stainless A2-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	7.5 mm
7380A20401670	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 16	Stainless A2-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	7.5 mm
7380A204018	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 18	Stainless A2-70	M4 x 18	Plain (no plating)	4 mm	18 mm	2.5 mm	7.5 mm
7380A204020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 20	Stainless A2-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	7.5 mm
7380A204020PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 20	Stainless A2-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	7.5 mm
7380A204022	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 22	Stainless A2-70	M4 x 22	Plain (no plating)	4 mm	22 mm	2.5 mm	7.5 mm
7380A204025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 25	Stainless A2-70	M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	7.5 mm
7380A20402570	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 25	Stainless A2-70	M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	7.5 mm
7380A204025PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 25	Stainless A2-70	M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	7.5 mm
7380A204030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,							

M4 x 30

Stainless A2-70	M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	7.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A204030PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 30	Stainless A2-70	M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	7.5 mm
7380A204035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 35	Stainless A2-70	M4 x 35	Plain (no plating)	4 mm	35 mm	2.5 mm	7.5 mm
7380A204040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 40	Stainless A2-70	M4 x 40	Plain (no plating)	4 mm	40 mm	2.5 mm	7.5 mm
7380A204040FT	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 40/	Stainless A2-70	M4 x 40/40	Plain (no plating)	4 mm	40 mm	2.5 mm	7.5 mm
7380A204045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 45	Stainless A2-70	M4 x 45	Plain (no plating)	4 mm	45 mm	2.5 mm	7.5 mm
7380A204050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 50	Stainless A2-70	M4 x 50	Plain (no plating)	4 mm	50 mm	2.5 mm	7.5 mm
7380A204060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 60	Stainless A2-70	M4 x 60	Plain (no plating)	4 mm	60 mm	2.5 mm	7.5 mm
7380A204065	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M4 x 65	Stainless A2-70	M4 x 65	Plain (no plating)	4 mm	65 mm	2.5 mm	7.5 mm
7380A205005	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 5	Stainless A2-70	M5 x 5	Plain (no plating)	5 mm	5 mm	3 mm	9.5 mm
7380A205006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 6	Stainless A2-70	M5 x 6	Plain (no plating)	5 mm	6 mm	3 mm	9.5 mm
7380A205008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 8	Stainless A2-70	M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	9.5 mm
7380A205010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 10	Stainless A2-70	M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	9.5 mm
7380A205010PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M5 x 10	Stainless A2	M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	9.5 mm
7380A205012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 12	Stainless A2-70	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A205012BULK	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M5 x 12	Stainless A2	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A205012F	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M5 x 12	Stainless A2	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A205014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 14	Stainless A2-70	M5 x 14	Plain (no plating)	5 mm	14 mm	3 mm	9.5 mm
7380A205016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 16	Stainless A2-70	M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	9.5 mm
7380A205018	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 18	Stainless A2-70	M5 x 18	Plain (no plating)	5 mm	18 mm	3 mm	9.5 mm
7380A205020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 20	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	9.5 mm
7380A205020FL	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 20	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	9.5 mm
7380A205020I	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 20	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	9.5 mm
7380A205025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 25	Stainless A2-70	M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
7380A205025F	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 25	Stainless A2-70	M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
7380A205030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 30	Stainless A2-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	9.5 mm
7380A205035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 35	Stainless A2-70	M5 x 35	Plain (no plating)	5 mm	35 mm	3 mm	9.5 mm
7380A205040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 40	Stainless A2-70	M5 x 40	Plain (no plating)	5 mm	40 mm	3 mm	9.5 mm
7380A205045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 45	Stainless A2-70	M5 x 45	Plain (no plating)	5 mm	45 mm	3 mm	9.5 mm
7380A205050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 50	Stainless A2-70	M5 x 50	Plain (no plating)	5 mm	50 mm	3 mm	9.5 mm
7380A205055	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 55	Stainless A2-70	M5 x 55	Plain (no plating)	5 mm	55 mm	3 mm	9.5 mm
7380A205060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 60	Stainless A2-70	M5 x 60	Plain (no plating)	5 mm	60 mm	3 mm	9.5 mm
7380A205070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 70	Stainless A2-70	M5 x 70	Plain (no plating)	5 mm	70 mm	3 mm	9.5 mm
7380A205080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 80	Stainless A2-70	M5 x 80	Plain (no plating)	5 mm	80 mm	3 mm	9.5 mm
7380A205100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M5 x 100	Stainless A2-70	M5 x 100	Plain (no plating)	5 mm	100 mm	3 mm	9.5 mm
7380A206006	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 6	Stainless A2-70	M6 x 6	Plain (no plating)	6 mm	6 mm	4 mm	10.5 mm
7380A206008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 8	Stainless A2-70	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
7380A206008F	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 8	Stainless A2	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
7380A206008PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 8	Stainless A2	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
7380A206010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 10	Stainless A2-70	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	10.5 mm
7380A206010DRI	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 10	Stainless A2	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	10.5 mm
7380A206010PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 10	Stainless A2	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	10.5 mm
7380A206012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 12	Stainless A2-70	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380A206012PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 12	Stainless A2	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380A206012SD	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 12	Stainless A2	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380A206014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 14	Stainless A2-70	M6 x 14	Plain (no plating)	6 mm	14 mm	4 mm	10.5 mm
7380A206016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,							

M6 x 16

Stainless A2-70	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	10.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A20601650FT	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M6 x 16	Stainless A2	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	10.5 mm
7380A206018	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 18	Stainless A2-70	M6 x 18	Plain (no plating)	6 mm	18 mm	4 mm	10.5 mm
7380A206020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 20	Stainless A2-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
7380A206020PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 20	Stainless A2-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
7380A206022	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 22	Stainless A2-70	M6 x 22	Plain (no plating)	6 mm	22 mm	4 mm	10.5 mm
7380A206023	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 23	Stainless A2-70	M6 x 23	Plain (no plating)	6 mm	23 mm	4 mm	10.5 mm
7380A206025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 25	Stainless A2-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	10.5 mm
7380A206025PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 25	Stainless A2-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	10.5 mm
7380A206030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 30	Stainless A2-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	10.5 mm
7380A206035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 35	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	10.5 mm
7380A20603570	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 35	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	10.5 mm
7380A206035PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 35	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	10.5 mm
7380A206038	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 38	Stainless A2-70	M6 x 38	Plain (no plating)	6 mm	38 mm	4 mm	10.5 mm
7380A206040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 40	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	10.5 mm
7380A206040PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 40	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	10.5 mm
7380A206043	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 43	Stainless A2-70	M6 x 43	Plain (no plating)	6 mm	43 mm	4 mm	10.5 mm
7380A206045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 45	Stainless A2-70	M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	10.5 mm
7380A206045F	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 45	Stainless A2-70	M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	10.5 mm
7380A206050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 50	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
7380A206050PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 50	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
7380A206060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 60	Stainless A2-70	M6 x 60	Plain (no plating)	6 mm	60 mm	4 mm	10.5 mm
7380A206065	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 65	Stainless A2-70	M6 x 65	Plain (no plating)	6 mm	65 mm	4 mm	10.5 mm
7380A206070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 70	Stainless A2-70	M6 x 70	Plain (no plating)	6 mm	70 mm	4 mm	10.5 mm
7380A206075	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 75	Stainless A2-70	M6 x 75	Plain (no plating)	6 mm	75 mm	4 mm	10.5 mm
7380A206075FT	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 75/	Stainless A2-70	M6 x 75/75	Plain (no plating)	6 mm	75 mm	4 mm	10.5 mm
7380A206080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 80	Stainless A2-70	M6 x 80	Plain (no plating)	6 mm	80 mm	4 mm	10.5 mm
7380A206090	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 90	Stainless A2-70	M6 x 90	Plain (no plating)	6 mm	90 mm	4 mm	10.5 mm
7380A206100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 100	Stainless A2-70	M6 x 100	Plain (no plating)	6 mm	100 mm	4 mm	10.5 mm
7380A206120	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M6 x 120	Stainless A2-70	M6 x 120	Plain (no plating)	6 mm	120 mm	4 mm	10.5 mm
7380A208007	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M8 x 7	Stainless A2	M8 x 7	Plain (no plating)	8 mm	7 mm	5 mm	14 mm
7380A208008	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 8	Stainless A2-70	M8 x 8	Plain (no plating)	8 mm	8 mm	5 mm	14 mm
7380A208010	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 10	Stainless A2-70	M8 x 10	Plain (no plating)	8 mm	10 mm	5 mm	14 mm
7380A208012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 12	Stainless A2-70	M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	14 mm
7380A208014	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 14	Stainless A2-70	M8 x 14	Plain (no plating)	8 mm	14 mm	5 mm	14 mm
7380A208016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 16	Stainless A2-70	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	14 mm
7380A208016PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M8 x 16	Stainless A2	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	14 mm
7380A208018	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M8 x 18	Stainless A2	M8 x 18	Plain (no plating)	8 mm	18 mm	5 mm	14 mm
7380A208020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 20	Stainless A2-70	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
7380A208025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 25	Stainless A2-70	M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	14 mm
7380A208030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 30	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	14 mm
7380A208030DRG	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 30	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	14 mm
7380A208034DRG	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 34	Stainless A2-70	M8 x 34	Plain (no plating)	8 mm	34 mm	5 mm	14 mm
7380A208035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 35	Stainless A2-70	M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm
7380A208035F	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 35	Stainless A2-70	M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm
7380A208035PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 35	Stainless A2-70	M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm
7380A208035W	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,							

M8 x 35

Stainless A2-70	M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A208040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 40	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	14 mm
7380A208040PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 40	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	14 mm
7380A208045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 45	Stainless A2-70	M8 x 45	Plain (no plating)	8 mm	45 mm	5 mm	14 mm
7380A208050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 50	Stainless A2-70	M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	14 mm
7380A208050PIN	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 50	Stainless A2-70	M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	14 mm
7380A208055	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 55	Stainless A2-70	M8 x 55	Plain (no plating)	8 mm	55 mm	5 mm	14 mm
7380A208060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 60	Stainless A2-70	M8 x 60	Plain (no plating)	8 mm	60 mm	5 mm	14 mm
7380A208065	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 65	Stainless A2-70	M8 x 65	Plain (no plating)	8 mm	65 mm	5 mm	14 mm
7380A208065FT	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 65/	Stainless A2-70	M8 x 65/65	Plain (no plating)	8 mm	65 mm	5 mm	14 mm
7380A208070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 70	Stainless A2-70	M8 x 70	Plain (no plating)	8 mm	70 mm	5 mm	14 mm
7380A208075	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 75	Stainless A2-70	M8 x 75	Plain (no plating)	8 mm	75 mm	5 mm	14 mm
7380A208080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 80	Stainless A2-70	M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	14 mm
7380A208090	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 90	Stainless A2-70	M8 x 90	Plain (no plating)	8 mm	90 mm	5 mm	14 mm
7380A208100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 100	Stainless A2-70	M8 x 100	Plain (no plating)	8 mm	100 mm	5 mm	14 mm
7380A208100F	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 100	Stainless A2-70	M8 x 100/100	Plain (no plating)	8 mm	100 mm	5 mm	14 mm
7380A208110	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 110	Stainless A2-70	M8 x 110	Plain (no plating)	8 mm	110 mm	5 mm	14 mm
7380A208120	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M8 x 120	Stainless A2-70	M8 x 120	Plain (no plating)	8 mm	120 mm	5 mm	14 mm
7380A210010	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M10 x 10	Stainless A2	M10 x 10	Plain (no plating)	10 mm	10 mm	6 mm	17.5 mm
7380A210012	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 12	Stainless A2-70	M10 x 12	Plain (no plating)	10 mm	12 mm	6 mm	17.5 mm
7380A210016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 16	Stainless A2-70	M10 x 16	Plain (no plating)	10 mm	16 mm	6 mm	17.5 mm
7380A210020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 20	Stainless A2-70	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	17.5 mm
7380A210020DRI	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M10 x 20	Stainless A2	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	17.5 mm
7380A210022	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 22	Stainless A2-70	M10 x 22	Plain (no plating)	10 mm	22 mm	6 mm	17.5 mm
7380A210025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 25	Stainless A2-70	M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	17.5 mm
7380A210030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 30	Stainless A2-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	17.5 mm
7380A210035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 35	Stainless A2-70	M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	17.5 mm
7380A210040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 40	Stainless A2-70	M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	17.5 mm
7380A210045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 45	Stainless A2-70	M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	17.5 mm
7380A210050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 50	Stainless A2-70	M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	17.5 mm
7380A210050PT	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 50	Stainless A2-70	M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	17.5 mm
7380A210055	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 55	Stainless A2-70	M10 x 55	Plain (no plating)	10 mm	55 mm	6 mm	17.5 mm
7380A210060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 60	Stainless A2-70	M10 x 60	Plain (no plating)	10 mm	60 mm	6 mm	17.5 mm
7380A210065	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 65	Stainless A2-70	M10 x 65	Plain (no plating)	10 mm	65 mm	6 mm	17.5 mm
7380A210070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 70	Stainless A2-70	M10 x 70	Plain (no plating)	10 mm	70 mm	6 mm	17.5 mm
7380A210075	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 75	Stainless A2-70	M10 x 75	Plain (no plating)	10 mm	75 mm	6 mm	17.5 mm
7380A210080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 80	Stainless A2-70	M10 x 80	Plain (no plating)	10 mm	80 mm	6 mm	17.5 mm
7380A210090	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 90	Stainless A2-70	M10 x 90	Plain (no plating)	10 mm	90 mm	6 mm	17.5 mm
7380A210095	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 95	Stainless A2-70	M10 x 95	Plain (no plating)	10 mm	95 mm	6 mm	17.5 mm
7380A210100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 10	Stainless A2-70	M10 x 100	Plain (no plating)	10 mm	100 mm	6 mm	17.5 mm
7380A210110	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 11	Stainless A2-70	M10 x 110	Plain (no plating)	10 mm	110 mm	6 mm	17.5 mm
7380A210120	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M10 x 12	Stainless A2-70	M10 x 120	Plain (no plating)	10 mm	120 mm	6 mm	17.5 mm
7380A212016	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 16	Stainless A2-70	M12 x 16	Plain (no plating)	12 mm	16 mm	8 mm	21 mm
7380A212020	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 20	Stainless A2-70	M12 x 20	Plain (no plating)	12 mm	20 mm	8 mm	21 mm
7380A212025	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 25	Stainless A2-70	M12 x 25	Plain (no plating)	12 mm	25 mm	8 mm	21 mm
7380A212030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 30	Stainless A2-70	M12 x 30	Plain (no plating)	12 mm	30 mm	8 mm	21 mm
7380A212035	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70,							

M12 x 35

Stainless A2-70	M12 x 35	Plain (no plating)	12 mm	35 mm	8 mm	21 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A212040	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 40	Stainless A2-70	M12 x 40	Plain (no plating)	12 mm	40 mm	8 mm	21 mm
7380A212045	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 45	Stainless A2-70	M12 x 45	Plain (no plating)	12 mm	45 mm	8 mm	21 mm
7380A212050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 50	Stainless A2-70	M12 x 50	Plain (no plating)	12 mm	50 mm	8 mm	21 mm
7380A212055	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 55	Stainless A2-70	M12 x 55	Plain (no plating)	12 mm	55 mm	8 mm	21 mm
7380A212060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 60	Stainless A2-70	M12 x 60	Plain (no plating)	12 mm	60 mm	8 mm	21 mm
7380A212070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 70	Stainless A2-70	M12 x 70	Plain (no plating)	12 mm	70 mm	8 mm	21 mm
7380A212075	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 75	Stainless A2-70	M12 x 75	Plain (no plating)	12 mm	75 mm	8 mm	21 mm
7380A212080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 80	Stainless A2-70	M12 x 80	Plain (no plating)	12 mm	80 mm	8 mm	21 mm
7380A212090	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 90	Stainless A2-70	M12 x 90	Plain (no plating)	12 mm	90 mm	8 mm	21 mm
7380A212100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 10	Stainless A2-70	M12 x 100	Plain (no plating)	12 mm	100 mm	8 mm	21 mm
7380A212100FT	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 10	Stainless A2-70	M12 x 100/100	Plain (no plating)	12 mm	100 mm	8 mm	21 mm
7380A212110	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 11	Stainless A2-70	M12 x 110	Plain (no plating)	12 mm	110 mm	8 mm	21 mm
7380A212120	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M12 x 12	Stainless A2-70	M12 x 120	Plain (no plating)	12 mm	120 mm	8 mm	21 mm
7380A216025	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M16 x 25	Stainless A2	M16 x 25	Plain (no plating)	16 mm	25 mm	10 mm	28 mm
7380A216030	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 30	Stainless A2-70	M16 x 30	Plain (no plating)	16 mm	30 mm	10 mm	28 mm
7380A216035	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M16 x 35	Stainless A2	M16 x 35	Plain (no plating)	16 mm	35 mm	10 mm	28 mm
7380A216040	ISO 7380-1 Button Head with Hex Drive, Stainless A2, M16 x 40	Stainless A2	M16 x 40	Plain (no plating)	16 mm	40 mm	10 mm	28 mm
7380A216050	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 50	Stainless A2-70	M16 x 50	Plain (no plating)	16 mm	50 mm	10 mm	28 mm
7380A216055	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 55	Stainless A2-70	M16 x 55	Plain (no plating)	16 mm	55 mm	10 mm	28 mm
7380A216060	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 60	Stainless A2-70	M16 x 60	Plain (no plating)	16 mm	60 mm	10 mm	28 mm
7380A216070	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 70	Stainless A2-70	M16 x 70	Plain (no plating)	16 mm	70 mm	10 mm	28 mm
7380A216080	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 80	Stainless A2-70	M16 x 80	Plain (no plating)	16 mm	80 mm	10 mm	28 mm
7380A216090	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 90	Stainless A2-70	M16 x 90	Plain (no plating)	16 mm	90 mm	10 mm	28 mm
7380A216100	ISO 7380-1 Button Head with Hex Drive, Stainless A2-70, M16 x 10	Stainless A2-70	M16 x 100	Plain (no plating)	16 mm	100 mm	10 mm	28 mm
7380A402004	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2 x 4	Stainless A4-70	M2 x 4	Plain (no plating)	2 mm	4 mm	1.3 mm	3.5 mm
7380A402005	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M2 x 5	Stainless A4	M2 x 5	Plain (no plating)	2 mm	5 mm	1.3 mm	3.5 mm
7380A402006	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2 x 6	Stainless A4-70	M2 x 6	Plain (no plating)	2 mm	6 mm	1.3 mm	3.5 mm
7380A402008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2 x 8	Stainless A4-70	M2 x 8	Plain (no plating)	2 mm	8 mm	1.3 mm	3.5 mm
7380A402012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2 x 12	Stainless A4-70	M2 x 12	Plain (no plating)	2 mm	12 mm	1.3 mm	3.5 mm
7380A4025004	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M2.5 x 4	Stainless A4	M2.5 x 4	Plain (no plating)	2.5 mm	4 mm	1.5 mm	4.5 mm
7380A4025005	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M2.5 x 5	Stainless A4	M2.5 x 5	Plain (no plating)	2.5 mm	5 mm	1.5 mm	4.5 mm
7380A4025006	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2.5 x 6	Stainless A4-70	M2.5 x 6	Plain (no plating)	2.5 mm	6 mm	1.5 mm	4.5 mm
7380A4025008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2.5 x 8	Stainless A4-70	M2.5 x 8	Plain (no plating)	2.5 mm	8 mm	1.5 mm	4.5 mm
7380A4025010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2.5 x 1	Stainless A4-70	M2.5 x 10	Plain (no plating)	2.5 mm	10 mm	1.5 mm	4.5 mm
7380A4025012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2.5 x 1	Stainless A4-70	M2.5 x 12	Plain (no plating)	2.5 mm	12 mm	1.5 mm	4.5 mm
7380A4025016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M2.5 x 1	Stainless A4-70	M2.5 x 16	Plain (no plating)	2.5 mm	16 mm	1.5 mm	4.5 mm
7380A403003	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 3	Stainless A4-70	M3 x 3	Plain (no plating)	3 mm	3 mm	2 mm	5.7 mm
7380A403004	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 4	Stainless A4-70	M3 x 4	Plain (no plating)	3 mm	4 mm	2 mm	5.7 mm
7380A403005	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 5	Stainless A4-70	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
7380A40300580	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3 x 5	Stainless A4	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
7380A40300580W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3 x 5	Stainless A4	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	5.7 mm
7380A403006	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 6	Stainless A4-70	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
7380A40300670	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3 x 6	Stainless A4	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
7380A40300680W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3 x 6	Stainless A4	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	5.7 mm
7380A403008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 8	Stainless A4-70	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm
7380A40300880	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3							

x 8

Stainless A4	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A40300880W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M3 x 8	Stainless A4	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	5.7 mm
7380A403010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 10	Stainless A4-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	5.7 mm
7380A403012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 12	Stainless A4-70	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
7380A40301280	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M3 x 12	Stainless A4-80	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm
7380A403014	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 14	Stainless A4-70	M3 x 14	Plain (no plating)	3 mm	14 mm	2 mm	5.7 mm
7380A403016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 16	Stainless A4-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A40301670	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 16	Stainless A4-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A403016FT	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 16	Stainless A4-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	5.7 mm
7380A403020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 20	Stainless A4-70	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	5.7 mm
7380A403025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 25	Stainless A4-70	M3 x 25	Plain (no plating)	3 mm	25 mm	2 mm	5.7 mm
7380A403030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 30	Stainless A4-70	M3 x 30	Plain (no plating)	3 mm	30 mm	2 mm	5.7 mm
7380A403035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M3 x 35	Stainless A4-70	M3 x 35	Plain (no plating)	3 mm	35 mm	2 mm	5.7 mm
7380A404004	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M4 x 4	Stainless A4	M4 x 4	Plain (no plating)	4 mm	4 mm	2.5 mm	7.5 mm
7380A404005	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 5	Stainless A4-70	M4 x 5	Plain (no plating)	4 mm	5 mm	2.5 mm	7.5 mm
7380A404006	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 6	Stainless A4-70	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	7.5 mm
7380A404008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 8	Stainless A4-70	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
7380A40400880	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M4 x 8	Stainless A4	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	7.5 mm
7380A404010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 10	Stainless A4-70	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
7380A40401080	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M4 x 10	Stainless A4	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
7380A40401080W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M4 x 10	Stainless A4	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	7.5 mm
7380A404012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 12	Stainless A4-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
7380A40401280	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M4 x 12	Stainless A4-80	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	7.5 mm
7380A404014	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 14	Stainless A4-70	M4 x 14	Plain (no plating)	4 mm	14 mm	2.5 mm	7.5 mm
7380A404016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 16	Stainless A4-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	7.5 mm
7380A404016FL	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 16	Stainless A4-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	7.5 mm
7380A404018	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 18	Stainless A4-70	M4 x 18	Plain (no plating)	4 mm	18 mm	2.5 mm	7.5 mm
7380A40401880	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M4 x 18	Stainless A4-80	M4 x 18	Plain (no plating)	4 mm	18 mm	2.5 mm	7.5 mm
7380A404020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 20	Stainless A4-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	7.5 mm
7380A40402070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 20	Stainless A4-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	7.5 mm
7380A404025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 25	Stainless A4-70	M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	7.5 mm
7380A404030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 30	Stainless A4-70	M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	7.5 mm
7380A404035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 35	Stainless A4-70	M4 x 35	Plain (no plating)	4 mm	35 mm	2.5 mm	7.5 mm
7380A404040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 40	Stainless A4-70	M4 x 40	Plain (no plating)	4 mm	40 mm	2.5 mm	7.5 mm
7380A404045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 45	Stainless A4-70	M4 x 45	Plain (no plating)	4 mm	45 mm	2.5 mm	7.5 mm
7380A404050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 50	Stainless A4-70	M4 x 50	Plain (no plating)	4 mm	50 mm	2.5 mm	7.5 mm
7380A404060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M4 x 60	Stainless A4-70	M4 x 60	Plain (no plating)	4 mm	60 mm	2.5 mm	7.5 mm
7380A405005	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M5 x 5	Stainless A4	M5 x 5	Plain (no plating)	5 mm	5 mm	3 mm	9.5 mm
7380A405006	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 6	Stainless A4-70	M5 x 6	Plain (no plating)	5 mm	6 mm	3 mm	9.5 mm
7380A405008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 8	Stainless A4-70	M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	9.5 mm
7380A405010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 10	Stainless A4-70	M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	9.5 mm
7380A405012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 12	Stainless A4-70	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A40501270	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M5 x 12	Stainless A4	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A40501280W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M5 x 12	Stainless A4	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A405012C20	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M5 x 12	Stainless A4	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	9.5 mm
7380A405016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 16	Stainless A4-70	M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	9.5 mm
7380A405020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70,							

M5 x 20

Stainless A4-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	9.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A405025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 25	Stainless A4-70	M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
7380A40502570	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 25	Stainless A4-70	M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	9.5 mm
7380A405030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 30	Stainless A4-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	9.5 mm
7380A40503070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 30	Stainless A4-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	9.5 mm
7380A405035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 35	Stainless A4-70	M5 x 35	Plain (no plating)	5 mm	35 mm	3 mm	9.5 mm
7380A405040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 40	Stainless A4-70	M5 x 40	Plain (no plating)	5 mm	40 mm	3 mm	9.5 mm
7380A405045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 45	Stainless A4-70	M5 x 45	Plain (no plating)	5 mm	45 mm	3 mm	9.5 mm
7380A405050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 50	Stainless A4-70	M5 x 50	Plain (no plating)	5 mm	50 mm	3 mm	9.5 mm
7380A405055	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 55	Stainless A4-70	M5 x 55	Plain (no plating)	5 mm	55 mm	3 mm	9.5 mm
7380A405060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 60	Stainless A4-70	M5 x 60	Plain (no plating)	5 mm	60 mm	3 mm	9.5 mm
7380A405070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 70	Stainless A4-70	M5 x 70	Plain (no plating)	5 mm	70 mm	3 mm	9.5 mm
7380A405080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M5 x 80	Stainless A4-70	M5 x 80	Plain (no plating)	5 mm	80 mm	3 mm	9.5 mm
7380A406006	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M6 x 6	Stainless A4	M6 x 6	Plain (no plating)	6 mm	6 mm	4 mm	10.5 mm
7380A40600670	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M6 x 6	Stainless A4	M6 x 6	Plain (no plating)	6 mm	6 mm	4 mm	10.5 mm
7380A406008	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 8	Stainless A4-70	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	10.5 mm
7380A406010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 10	Stainless A4-70	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	10.5 mm
7380A406012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 12	Stainless A4-70	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380A40601280	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M6 x 12	Stainless A4	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380A406014	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 14	Stainless A4-70	M6 x 14	Plain (no plating)	6 mm	14 mm	4 mm	10.5 mm
7380A406016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 16	Stainless A4-70	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	10.5 mm
7380A406020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 20	Stainless A4-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
7380A40602080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M6 x 20	Stainless A4-80	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
7380A40602080W	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M6 x 20	Stainless A4-80	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	10.5 mm
7380A406025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 25	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	10.5 mm
7380A406030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 30	Stainless A4-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	10.5 mm
7380A406035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 35	Stainless A4-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	10.5 mm
7380A406040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 40	Stainless A4-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	10.5 mm
7380A406045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 45	Stainless A4-70	M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	10.5 mm
7380A406050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 50	Stainless A4-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	10.5 mm
7380A406055	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 55	Stainless A4-70	M6 x 55	Plain (no plating)	6 mm	55 mm	4 mm	10.5 mm
7380A406060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 60	Stainless A4-70	M6 x 60	Plain (no plating)	6 mm	60 mm	4 mm	10.5 mm
7380A406065	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 65	Stainless A4-70	M6 x 65	Plain (no plating)	6 mm	65 mm	4 mm	10.5 mm
7380A406070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 70	Stainless A4-70	M6 x 70	Plain (no plating)	6 mm	70 mm	4 mm	10.5 mm
7380A406075	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 75	Stainless A4-70	M6 x 75	Plain (no plating)	6 mm	75 mm	4 mm	10.5 mm
7380A406080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 80	Stainless A4-70	M6 x 80	Plain (no plating)	6 mm	80 mm	4 mm	10.5 mm
7380A406090	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 90	Stainless A4-70	M6 x 90	Plain (no plating)	6 mm	90 mm	4 mm	10.5 mm
7380A406100	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M6 x 100	Stainless A4-70	M6 x 100	Plain (no plating)	6 mm	100 mm	4 mm	10.5 mm
7380A406120	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M6 x 120	Stainless A4-80	M6 x 120	Plain (no plating)	6 mm	120 mm	4 mm	10.5 mm
7380A408008	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 8	Stainless A4	M8 x 8	Plain (no plating)	8 mm	8 mm	5 mm	14 mm
7380A408010	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 10	Stainless A4-70	M8 x 10	Plain (no plating)	8 mm	10 mm	5 mm	14 mm
7380A408012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 12	Stainless A4-70	M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	14 mm
7380A40801270	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 12	Stainless A4	M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	14 mm
7380A40801280W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 12	Stainless A4	M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	14 mm
7380A408014	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 14	Stainless A4-70	M8 x 14	Plain (no plating)	8 mm	14 mm	5 mm	14 mm
7380A408016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 16	Stainless A4-70	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	14 mm
7380A40801670	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8							

x 16

Stainless A4	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	14 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A408020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 20	Stainless A4-70	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
7380A40802070	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 20	Stainless A4	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
7380A40802080	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 20	Stainless A4	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
7380A40802080W	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M8 x 20	Stainless A4	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	14 mm
7380A408025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 25	Stainless A4-70	M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	14 mm
7380A40802580	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M8 x 25	Stainless A4-80	M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	14 mm
7380A408030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 30	Stainless A4-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	14 mm
7380A40803070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 30	Stainless A4-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	14 mm
7380A408035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 35	Stainless A4-70	M8 x 35	Plain (no plating)	8 mm	35 mm	5 mm	14 mm
7380A408040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 40	Stainless A4-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	14 mm
7380A408045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 45	Stainless A4-70	M8 x 45	Plain (no plating)	8 mm	45 mm	5 mm	14 mm
7380A408050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 50	Stainless A4-70	M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	14 mm
7380A408055	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 55	Stainless A4-70	M8 x 55	Plain (no plating)	8 mm	55 mm	5 mm	14 mm
7380A408060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 60	Stainless A4-70	M8 x 60	Plain (no plating)	8 mm	60 mm	5 mm	14 mm
7380A408065	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 65	Stainless A4-70	M8 x 65	Plain (no plating)	8 mm	65 mm	5 mm	14 mm
7380A408070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 70	Stainless A4-70	M8 x 70	Plain (no plating)	8 mm	70 mm	5 mm	14 mm
7380A408075	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 75	Stainless A4-70	M8 x 75	Plain (no plating)	8 mm	75 mm	5 mm	14 mm
7380A408080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 80	Stainless A4-70	M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	14 mm
7380A40808070FT	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 80/	Stainless A4-70	M8 x 80/80	Plain (no plating)	8 mm	80 mm	5 mm	14 mm
7380A40808080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M8 x 80	Stainless A4-80	M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	14 mm
7380A408090	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 90/	Stainless A4-70	M8 x 90/90	Plain (no plating)	8 mm	90 mm	5 mm	14 mm
7380A408100	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 100	Stainless A4-70	M8 x 100	Plain (no plating)	8 mm	100 mm	5 mm	14 mm
7380A408110	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 110	Stainless A4-70	M8 x 110	Plain (no plating)	8 mm	110 mm	5 mm	14 mm
7380A408140THD30	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M8 x 140	Stainless A4-70	M8 x 140/30	Plain (no plating)	8 mm	140 mm	5 mm	14 mm
7380A410012	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 12	Stainless A4-70	M10 x 12	Plain (no plating)	10 mm	12 mm	6 mm	17.5 mm
7380A410015	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M10 x 15	Stainless A4	M10 x 15	Plain (no plating)	10 mm	15 mm	6 mm	17.5 mm
7380A410016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 16	Stainless A4-70	M10 x 16	Plain (no plating)	10 mm	16 mm	6 mm	17.5 mm
7380A41001680	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M10 x 16	Stainless A4	M10 x 16	Plain (no plating)	10 mm	16 mm	6 mm	17.5 mm
7380A410020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 20	Stainless A4-70	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	17.5 mm
7380A410025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 25	Stainless A4-70	M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	17.5 mm
7380A41002570	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M10 x 25	Stainless A4	M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	17.5 mm
7380A410030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 30	Stainless A4-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	17.5 mm
7380A410035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 35	Stainless A4-70	M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	17.5 mm
7380A410040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 40	Stainless A4-70	M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	17.5 mm
7380A41004080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M10 x 40	Stainless A4-80	M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	17.5 mm
7380A410045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 45	Stainless A4-70	M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	17.5 mm
7380A410045DRI	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 45	Stainless A4-70	M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	17.5 mm
7380A410045DRII	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 45	Stainless A4-70	M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	17.5 mm
7380A410050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 50	Stainless A4-70	M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	17.5 mm
7380A41005080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M10 x 50	Stainless A4-80	M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	17.5 mm
7380A410055	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 55	Stainless A4-70	M10 x 55	Plain (no plating)	10 mm	55 mm	6 mm	17.5 mm
7380A41005580	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M10 x 55	Stainless A4-80	M10 x 55	Plain (no plating)	10 mm	55 mm	6 mm	17.5 mm
7380A410060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 60	Stainless A4-70	M10 x 60	Plain (no plating)	10 mm	60 mm	6 mm	17.5 mm
7380A410065	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 65	Stainless A4-70	M10 x 65	Plain (no plating)	10 mm	65 mm	6 mm	17.5 mm
7380A410070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 70	Stainless A4-70	M10 x 70	Plain (no plating)	10 mm	70 mm	6 mm	17.5 mm
7380A410075	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70,							

M10 x 75

Stainless A4-70	M10 x 75	Plain (no plating)	10 mm	75 mm	6 mm	17.5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A410080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 80	Stainless A4-70	M10 x 80	Plain (no plating)	10 mm	80 mm	6 mm	17.5 mm
7380A410090	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 90	Stainless A4-70	M10 x 90	Plain (no plating)	10 mm	90 mm	6 mm	17.5 mm
7380A410100	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 10	Stainless A4-70	M10 x 100	Plain (no plating)	10 mm	100 mm	6 mm	17.5 mm
7380A41010080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M10 x 10	Stainless A4-80	M10 x 100	Plain (no plating)	10 mm	100 mm	6 mm	17.5 mm
7380A410110	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 11	Stainless A4-70	M10 x 110	Plain (no plating)	10 mm	110 mm	6 mm	17.5 mm
7380A410120	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M10 x 12	Stainless A4-70	M10 x 120	Plain (no plating)	10 mm	120 mm	6 mm	17.5 mm
7380A412016	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 16	Stainless A4-70	M12 x 16	Plain (no plating)	12 mm	16 mm	8 mm	21 mm
7380A412020	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 20	Stainless A4-70	M12 x 20	Plain (no plating)	12 mm	20 mm	8 mm	21 mm
7380A412025	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 25	Stainless A4-70	M12 x 25	Plain (no plating)	12 mm	25 mm	8 mm	21 mm
7380A412030	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 30	Stainless A4-70	M12 x 30	Plain (no plating)	12 mm	30 mm	8 mm	21 mm
7380A412035	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 35	Stainless A4-70	M12 x 35	Plain (no plating)	12 mm	35 mm	8 mm	21 mm
7380A412040	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 40	Stainless A4-70	M12 x 40	Plain (no plating)	12 mm	40 mm	8 mm	21 mm
7380A412045	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 45	Stainless A4-70	M12 x 45	Plain (no plating)	12 mm	45 mm	8 mm	21 mm
7380A412050	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 50	Stainless A4-70	M12 x 50	Plain (no plating)	12 mm	50 mm	8 mm	21 mm
7380A412055	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 55	Stainless A4-70	M12 x 55	Plain (no plating)	12 mm	55 mm	8 mm	21 mm
7380A412060	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 60	Stainless A4-70	M12 x 60	Plain (no plating)	12 mm	60 mm	8 mm	21 mm
7380A412070	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 70	Stainless A4-70	M12 x 70	Plain (no plating)	12 mm	70 mm	8 mm	21 mm
7380A412075	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 75	Stainless A4-70	M12 x 75	Plain (no plating)	12 mm	75 mm	8 mm	21 mm
7380A412080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 80	Stainless A4-70	M12 x 80	Plain (no plating)	12 mm	80 mm	8 mm	21 mm
7380A412090	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 90	Stainless A4-70	M12 x 90	Plain (no plating)	12 mm	90 mm	8 mm	21 mm
7380A412100	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 10	Stainless A4-70	M12 x 100	Plain (no plating)	12 mm	100 mm	8 mm	21 mm
7380A412110	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 11	Stainless A4-70	M12 x 110	Plain (no plating)	12 mm	110 mm	8 mm	21 mm
7380A412120	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 12	Stainless A4-70	M12 x 120	Plain (no plating)	12 mm	120 mm	8 mm	21 mm
7380A412180	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M12 x 18	Stainless A4-70	M12 x 180	Plain (no plating)	12 mm	180 mm	8 mm	21 mm
7380A416015	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M16 x 15	Stainless A4	M16 x 15	Plain (no plating)	16 mm	15 mm	10 mm	28 mm
7380A41606080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-80, M16 x 60	Stainless A4-80	M16 x 60	Plain (no plating)	16 mm	60 mm	10 mm	28 mm
7380A416080	ISO 7380-1 Button Head with Hex Drive, Stainless A4-70, M16 x 80	Stainless A4-70	M16 x 80	Plain (no plating)	16 mm	80 mm	10 mm	28 mm
7380A4L0601280	ISO 7380-1 Button Head with Hex Drive, Stainless A4, M6 x 12	Stainless A4	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380B06012	ISO 7380-1 Button Head with Hex Drive, Brass, M6 x 12, Plain	Brass	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	10.5 mm
7380T03012	ISO 7380-1 Button Head with Hex Drive, TITANIUM GR.2, M3 x 12, P	TITANIUM GR.2	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	5.7 mm