
ISO 7380-2 — Button Head with Hex Drive and Flange

Catalogue data sheet · 295 sizes · category Bolts and Screws / Socket Head Screws · Source: Bufab public catalogue (bufab.com), compiled by cBallast 2026-09-15. Dimensions in mm unless stated. Confirm the controlling standard revision before procurement.



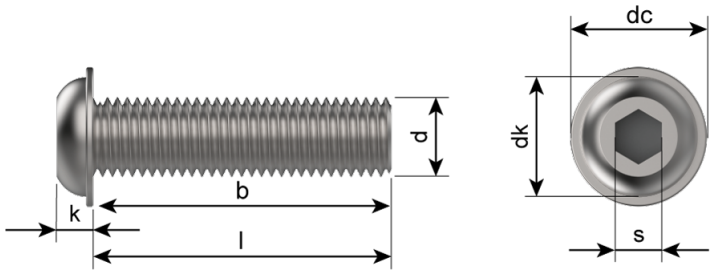

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380-2A208040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-7	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
73801004006F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
73801004006FL	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
73801005008F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	
738010050101F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm	3 mm	
73801005010F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	
738010050121F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 12	Zinc Bright Passivation Fe/Zn P1	5 mm	12 mm	3 mm	
738010050161F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 16	Zinc Bright Passivation Fe/Zn P1	5 mm	16 mm	3 mm	
73801005016F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	
738010050201F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 20	Zinc Bright Passivation Fe/Zn P1	5 mm	20 mm	3 mm	
73801005020F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	
738010050251F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 25	Zinc Bright Passivation Fe/Zn P1	5 mm	25 mm	3 mm	
738010060121F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Zinc Bright Passivation Fe/Zn P1	6 mm	12 mm	4 mm	
738010060121FL	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Zinc Bright Passivation Fe/Zn P1	6 mm	12 mm	4 mm	
73801006012F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
73801006012FL	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
738010060161F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 16	Zinc Bright Passivation Fe/Zn P1	6 mm	16 mm	4 mm	
73801006016F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
738010060201F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	
73801006020F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	
738010060251F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 25	Zinc Bright Passivation Fe/Zn P1	6 mm	25 mm	4 mm	
73801006025F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
738010060301F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 30	Zinc Bright Passivation Fe/Zn P1	6 mm	30 mm	4 mm	
73801006030F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	
738010060351F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 35	Zinc Bright Passivation Fe/Zn P1	6 mm	35 mm	4 mm	
738010060401F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel							

10.9, 01

Steel 10.9	010.9 M6 x 40	Zinc Bright Passivation Fe/Zn P1	6 mm	40 mm	4 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
738010080121F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 12	Zinc Bright Passivation Fe/Zn P1	8 mm	12 mm	5 mm	
738010080161F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 16	Zinc Bright Passivation Fe/Zn P1	8 mm	16 mm	5 mm	
73801008016F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	
73801008020F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
73801008040F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
73801008050F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	
73801010020F	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	
73802010080141	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 14	Zinc Bright Passivation Fe/Zn P1	8 mm	14 mm	5 mm	
738021003008	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-M3	Steel 10.9	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	
7380210030081	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-M3	Steel 10.9	M3 x 8	Zinc Bright Passivation Fe/Zn P1	3 mm	8 mm	2 mm	
738021003010	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-M3	Steel 10.9	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	
738021004006	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
7380210040061	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 6	Zinc Bright Passivation Fe/Zn P1	4 mm	6 mm	2.5 mm	
738021004008	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
7380210040081	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 8	Zinc Bright Passivation Fe/Zn P1	4 mm	8 mm	2.5 mm	
738021004010	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	
7380210040101	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 10	Zinc Bright Passivation Fe/Zn P1	4 mm	10 mm	2.5 mm	
738021004012	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	
7380210040121	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 12	Zinc Bright Passivation Fe/Zn P1	4 mm	12 mm	2.5 mm	
7380210040141	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 14	Zinc Bright Passivation Fe/Zn P1	4 mm	14 mm	2.5 mm	
738021004016	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	
7380210040161	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 16	Zinc Bright Passivation Fe/Zn P1	4 mm	16 mm	2.5 mm	
738021005008	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	
7380210050081	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 8	Zinc Bright Passivation Fe/Zn P1	5 mm	8 mm	3 mm	
738021005010	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	
7380210050101	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm	3 mm	
738021005012	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	
7380210050121	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 12	Zinc Bright Passivation Fe/Zn P1	5 mm	12 mm	3 mm	
738021005020	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	
7380210050251	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 25	Zinc Bright Passivation Fe/Zn P1	5 mm	25 mm	3 mm	
738021005030	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	
7380210060081	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 8	Zinc Bright Passivation Fe/Zn P1	6 mm	8 mm	4 mm	
738021006010	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
7380210060101	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm	4 mm	
7380210060101FL	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm	4 mm	
738021006010I	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
738021006012	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
7380210060121	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 12	Zinc Bright Passivation Fe/Zn P1	6 mm	12 mm	4 mm	
738021006016	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
7380210060161	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 16	Zinc Bright Passivation Fe/Zn P1	6 mm	16 mm	4 mm	
738021006020	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	
7380210060201	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 20	Zinc Bright Passivation Fe/Zn P1	6 mm	20 mm	4 mm	
738021006025	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
7380210060251	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 25	Zinc Bright Passivation Fe/Zn P1	6 mm	25 mm	4 mm	
7380210060301	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 30	Zinc Bright Passivation Fe/Zn P1	6 mm	30 mm	4 mm	
738021006035	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01							

10.9, 01

Steel 10.9	010.9 M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380210060401	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 40	Zinc Bright Passivation Fe/Zn P1	6 mm	40 mm	4 mm	
7380210060451	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 45	Zinc Bright Passivation Fe/Zn P1	6 mm	45 mm	4 mm	
7380210060501	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 50	Zinc Bright Passivation Fe/Zn P1	6 mm	50 mm	4 mm	
7380210060601	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 60	Zinc Bright Passivation Fe/Zn P1	6 mm	60 mm	4 mm	
738021006061	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 6	Zinc Bright Passivation Fe/Zn P1	6 mm	6 mm	4 mm	
738021008012	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	
738021008016	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	
7380210080161	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 16	Zinc Bright Passivation Fe/Zn P1	8 mm	16 mm	5 mm	
738021008020	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
7380210080201	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 20	Zinc Bright Passivation Fe/Zn P1	8 mm	20 mm	5 mm	
738021008025	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	
7380210080251	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 25	Zinc Bright Passivation Fe/Zn P1	8 mm	25 mm	5 mm	
738021008030	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	
7380210080351	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 35	Zinc Bright Passivation Fe/Zn P1	8 mm	35 mm	5 mm	
7380210080401	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 40	Zinc Bright Passivation Fe/Zn P1	8 mm	40 mm	5 mm	
7380210080501	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 50	Zinc Bright Passivation Fe/Zn P1	8 mm	50 mm	5 mm	
7380210080601	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 60	Zinc Bright Chromating Fe/Zn C1	8 mm	60 mm	5 mm	
7380210100201	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 20	Zinc Bright Passivation Fe/Zn P1	10 mm	20 mm	6 mm	
7380210100251	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 25	Zinc Bright Passivation Fe/Zn P1	10 mm	25 mm	6 mm	
738021010030	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	
738021010035	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	
7380210100351	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 35	Zinc Bright Passivation Fe/Zn P1	10 mm	35 mm	6 mm	
738021010040	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	
7380210100401	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 40	Zinc Bright Passivation Fe/Zn P1	10 mm	40 mm	6 mm	
7380210100601	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 60	Zinc Bright Passivation Fe/Zn P1	10 mm	60 mm	6 mm	
7380210120351	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M12 x 35	Zinc Bright Passivation Fe/Zn P1	12 mm	35 mm	8 mm	
7380210120401	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M12 x 40	Zinc Bright Passivation Fe/Zn P1	12 mm	40 mm	8 mm	
7380210120501	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M12 x 50	Zinc Bright Passivation Fe/Zn P1	12 mm	50 mm	8 mm	
7380210120601	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M12 x 60	Zinc Bright Passivation Fe/Zn P1	12 mm	60 mm	8 mm	
738028080121	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 8.8-08	Steel 8.8	08.8 M8 x 12	Zinc Bright Passivation Fe/Zn P1	8 mm	12 mm	5 mm	
73802A203004	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 4	Plain (no plating)	3 mm	4 mm	2 mm	
73802A203008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	
73802A203018	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 18	Plain (no plating)	3 mm	18 mm	2 mm	
73802A204006	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
73802A204008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
73802A204010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	
73802A204012	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	
73802A204014	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 14	Plain (no plating)	4 mm	14 mm	2.5 mm	
73802A204016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	
73802A204020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	
73802A204030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	
73802A204050	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 50	Plain (no plating)	4 mm	50 mm	2.5 mm	
73802A205008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	
73802A205010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	
73802A205012	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	
73802A205012DRI	ISO 7380-2 Button Head with Hex Drive and Flange,							

Stainless A2,

Stainless A2	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73802A205016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	
73802A205020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	
73802A205025	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 25	Plain (no plating)	5 mm	25 mm	3 mm	
73802A205030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	
73802A205040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 40	Plain (no plating)	5 mm	40 mm	3 mm	
73802A205070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 70	Plain (no plating)	5 mm	70 mm	3 mm	
73802A205070DRI	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 70	Plain (no plating)	5 mm	70 mm	3 mm	
73802A206008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	
73802A206010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
73802A206012	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
73802A206014	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 14	Plain (no plating)	6 mm	14 mm	4 mm	
73802A206016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
73802A206020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	
73802A206025	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
73802A206030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	
73802A206035	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	
73802A206040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	
73802A206050	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	
73802A208016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	
73802A208020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
73802A208025	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2-70	M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	
73802A208030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	
73802A208040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
73802A210020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	
73802A212020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M12 x 20	Plain (no plating)	12 mm	20 mm	8 mm	
73802A403010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	
73802A403014	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M3 x 14	Plain (no plating)	3 mm	14 mm	2 mm	
73802A403030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M3 x 30	Plain (no plating)	3 mm	30 mm	2 mm	
73802A404008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
73802A40401080	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	
73802A404012	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	
73802A404016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	
73802A405005	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M5 x 5	Plain (no plating)	5 mm	5 mm	3 mm	
73802A405016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	
73802A406008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	
73802A406010/10	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
73802A40601270	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
73802A406016/16	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
73802A406020/20	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	
73802A406025	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
73802A40602570	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
73802A406030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	
73802A406040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	
73802A406045	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	
73802A406075	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 75	Plain (no plating)	6 mm	75 mm	4 mm	
73802A408020	ISO 7380-2 Button Head with Hex Drive and Flange,							

Stainless A4,

Stainless A4	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
73802A40802080W	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
73802A408030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M8 x 30/30	Plain (no plating)	8 mm	30 mm	5 mm	
73802A40806570	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M8 x 65	Plain (no plating)	8 mm	65 mm	5 mm	
73802A41001670	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 16	Plain (no plating)	10 mm	16 mm	6 mm	
73802A41002070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	
73802A41002570	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	
73802A41003070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	
73802A41003570	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	
73802A410040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	
73802A41206570FT	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M12 x 65/65	Plain (no plating)	12 mm	65 mm	8 mm	
7380A203004F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M3 x 4	Plain (no plating)	3 mm	4 mm	2 mm	
7380A203005F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	
7380A203006F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M3 x 6	Plain (no plating)	3 mm	6 mm	2 mm	
7380A203008F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M3 x 8	Plain (no plating)	3 mm	8 mm	2 mm	
7380A203010F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 10	Plain (no plating)	3 mm	10 mm	2 mm	
7380A203012F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 12	Plain (no plating)	3 mm	12 mm	2 mm	
7380A203014F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 14	Plain (no plating)	3 mm	14 mm	2 mm	
7380A203016F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 16	Plain (no plating)	3 mm	16 mm	2 mm	
7380A203020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	
7380A203025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 25	Plain (no plating)	3 mm	25 mm	2 mm	
7380A204006F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
7380A204006FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
7380A204008F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
7380A204010F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 10	Plain (no plating)	4 mm	10 mm	2.5 mm	
7380A204012F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	
7380A204016F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 16	Plain (no plating)	4 mm	16 mm	2.5 mm	
7380A204020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	
7380A204025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 25	Plain (no plating)	4 mm	25 mm	2.5 mm	
7380A204030F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 30	Plain (no plating)	4 mm	30 mm	2.5 mm	
7380A204035F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 35	Plain (no plating)	4 mm	35 mm	2.5 mm	
7380A204040F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 40	Plain (no plating)	4 mm	40 mm	2.5 mm	
7380A204050F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 50	Plain (no plating)	4 mm	50 mm	2.5 mm	
7380A204060F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M4 x 60	Plain (no plating)	4 mm	60 mm	2.5 mm	
7380A205006F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 6	Plain (no plating)	5 mm	6 mm	3 mm	
7380A205006FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 6	Plain (no plating)	5 mm	6 mm	3 mm	
7380A205008F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 8	Plain (no plating)	5 mm	8 mm	3 mm	
7380A205010F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M5 x 10	Plain (no plating)	5 mm	10 mm	3 mm	
7380A205016F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 16	Plain (no plating)	5 mm	16 mm	3 mm	
7380A205018F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 18	Plain (no plating)	5 mm	18 mm	3 mm	
7380A205020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	
7380A205030F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	
7380A205035F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 35	Plain (no plating)	5 mm	35 mm	3 mm	
7380A205040F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 40	Plain (no plating)	5 mm	40 mm	3 mm	
7380A205050F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 50	Plain (no plating)	5 mm	50 mm	3 mm	
7380A205065F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M5 x 65	Plain (no plating)	5 mm	65 mm	3 mm	
7380A205070F	ISO 7380-2 Button Head with Hex Drive and Flange,							

Stainless A2-7

Stainless A2-70	M5 x 70	Plain (no plating)	5 mm	70 mm	3 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380A206010F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
7380A206012F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 12	Plain (no plating)	6 mm	12 mm	4 mm	
7380A206016F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
7380A206016FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M6 x 16	Plain (no plating)	6 mm	16 mm	4 mm	
7380A206020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 20	Plain (no plating)	6 mm	20 mm	4 mm	
7380A206025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
7380A206030F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm	
7380A206035F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	
7380A206040F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	
7380A206040FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	
7380A206050F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	
7380A206060F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 60	Plain (no plating)	6 mm	60 mm	4 mm	
7380A206070F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 70	Plain (no plating)	6 mm	70 mm	4 mm	
7380A206120F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 120	Plain (no plating)	6 mm	120 mm	4 mm	
7380A208010F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 10	Plain (no plating)	8 mm	10 mm	5 mm	
7380A208012F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 12	Plain (no plating)	8 mm	12 mm	5 mm	
7380A208016F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	
7380A208020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
7380A208020FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
7380A208025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 25	Plain (no plating)	8 mm	25 mm	5 mm	
7380A208030F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	
7380A208030FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 30	Plain (no plating)	8 mm	30 mm	5 mm	
7380A208040F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
7380A208045F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 45	Plain (no plating)	8 mm	45 mm	5 mm	
7380A208050F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	
7380A208060F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 60	Plain (no plating)	8 mm	60 mm	5 mm	
7380A208070F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 70	Plain (no plating)	8 mm	70 mm	5 mm	
7380A208080F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	
7380A208090F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 90	Plain (no plating)	8 mm	90 mm	5 mm	
7380A210020F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M10 x 20	Plain (no plating)	10 mm	20 mm	6 mm	
7380A210025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M10 x 25	Plain (no plating)	10 mm	25 mm	6 mm	
7380A210030F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	
7380A210035F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 35	Plain (no plating)	10 mm	35 mm	6 mm	
7380A210040F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 40	Plain (no plating)	10 mm	40 mm	6 mm	
7380A210045F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 45	Plain (no plating)	10 mm	45 mm	6 mm	
7380A210050F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 50	Plain (no plating)	10 mm	50 mm	6 mm	
7380A405008FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
7380A405012FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4	Stainless A4	M5 x 12	Plain (no plating)	5 mm	12 mm	3 mm	
7380A406025F	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
7380A406025FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M6 x 25	Plain (no plating)	6 mm	25 mm	4 mm	
7380A410030FL	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	
7380F10040201	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 20	Plain (no plating)	4 mm	20 mm	2.5 mm	
7380F10040301	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 30	Zinc Bright Passivation Fe/Zn P1	4 mm	30 mm	2.5 mm	
7380F10080201	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 20	Zinc Bright Passivation Fe/Zn P1	8 mm	20 mm	5 mm	
7380FA204006	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2	Stainless A2	M4 x 6	Plain (no plating)	4 mm	6 mm	2.5 mm	
7380FA206030	ISO 7380-2 Button Head with Hex Drive and Flange,							

Stainless A2-7

Stainless A2-70	M6 x 30	Plain (no plating)	6 mm	30 mm	4 mm

Article no.	Designation (Bufab)	Material / class	Size	Surface finish	Thread	Length	A/F	Head / outer Ø
7380FA206035	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 35	Plain (no plating)	6 mm	35 mm	4 mm	
7380FA206040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 40	Plain (no plating)	6 mm	40 mm	4 mm	
7380FA206045	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 45	Plain (no plating)	6 mm	45 mm	4 mm	
7380FA206050	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 50	Plain (no plating)	6 mm	50 mm	4 mm	
7380FA206065	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 65/65	Plain (no plating)	6 mm	65 mm	4 mm	
7380FA206070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 70/70	Plain (no plating)	6 mm	70 mm	4 mm	
7380FA208040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
7380FA208050	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 50	Plain (no plating)	8 mm	50 mm	5 mm	
7380FA208060	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 60	Plain (no plating)	8 mm	60 mm	5 mm	
7380FA208070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 70	Plain (no plating)	8 mm	70 mm	5 mm	
7380FA208080	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 80	Plain (no plating)	8 mm	80 mm	5 mm	
7380FA208090	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 90	Plain (no plating)	8 mm	90 mm	5 mm	
7380FA208100	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 100	Plain (no plating)	8 mm	100 mm	5 mm	
7380FA210030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M10 x 30	Plain (no plating)	10 mm	30 mm	6 mm	
K6SF1004012	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M4 x 12	Plain (no plating)	4 mm	12 mm	2.5 mm	
K6SF10050103	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 10	Zinc Bright Passivation Fe/Zn P1	5 mm	10 mm	3 mm	
K6SF10050251TX	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M5 x 25	Zinc Bright Passivation Fe/Zn P1	5 mm	25 mm	3 mm	
K6SF10060101FL	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 10	Zinc Bright Passivation Fe/Zn P1	6 mm	10 mm	4 mm	
K6SF1006060	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M6 x 60	Plain (no plating)	6 mm	60 mm	4 mm	
K6SF10080501	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M8 x 50	Zinc Bright Passivation Fe/Zn P1	8 mm	50 mm	5 mm	
K6SF10100251	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M10 x 25	Zinc Bright Passivation Fe/Zn P1	10 mm	25 mm	6 mm	
K6SF10120401	ISO 7380-2 Button Head with Hex Drive and Flange, Steel 10.9-01	Steel 10.9	010.9 M12 x 40	Zinc Bright Passivation Fe/Zn P1	12 mm	40 mm	8 mm	
K6SFA203005	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M3 x 5	Plain (no plating)	3 mm	5 mm	2 mm	
K6SFA203020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M3 x 20	Plain (no plating)	3 mm	20 mm	2 mm	
K6SFA204004	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M4 x 4	Plain (no plating)	4 mm	4 mm	2.5 mm	
K6SFA204008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
K6SFA206008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M6 x 8	Plain (no plating)	6 mm	8 mm	4 mm	
K6SFA206010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M6 x 10	Plain (no plating)	6 mm	10 mm	4 mm	
K6SFA206070	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 70	Plain (no plating)	6 mm	70 mm	4 mm	
K6SFA206090	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M6 x 90	Plain (no plating)	6 mm	90 mm	4 mm	
K6SFA208008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M8 x 8	Plain (no plating)	8 mm	8 mm	5 mm	
K6SFA208016	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M8 x 16	Plain (no plating)	8 mm	16 mm	5 mm	
K6SFA208020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M8 x 20	Plain (no plating)	8 mm	20 mm	5 mm	
K6SFA208040	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2-70	Stainless A2-70	M8 x 40	Plain (no plating)	8 mm	40 mm	5 mm	
K6SFA210012	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A2,	Stainless A2	M10 x 12	Plain (no plating)	10 mm	12 mm	6 mm	
K6SFA404008	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4,	Stainless A4	M4 x 8	Plain (no plating)	4 mm	8 mm	2.5 mm	
K6SFA405020	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M5 x 20	Plain (no plating)	5 mm	20 mm	3 mm	
K6SFA405030	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4-70	Stainless A4-70	M5 x 30	Plain (no plating)	5 mm	30 mm	3 mm	
K6SFA408010	ISO 7380-2 Button Head with Hex Drive and Flange, Stainless A4,	Stainless A4	M8 x 10	Plain (no plating)	8 mm	10 mm	5 mm	