


# Rittal – The System.

Faster – better – everywhere.

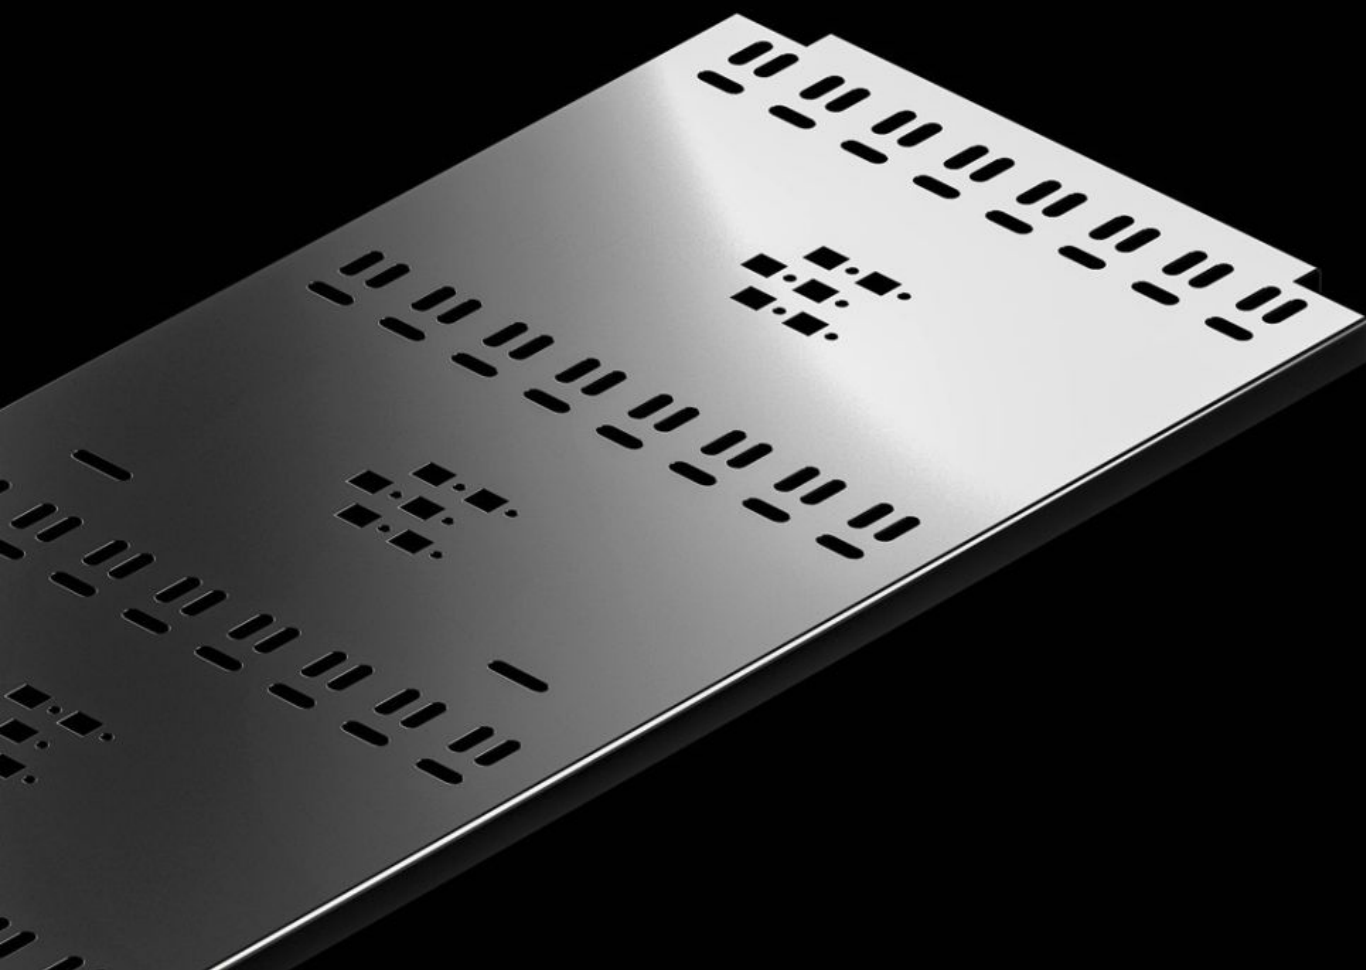

## DK 7888.322 Cable route

State: 23/07/2026 (Source: [rittal.com/com-en](http://rittal.com/com-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# DK 7888.322 - Cable route for TX CableNet

For rear, side attachment of a cable tray to mounting frames inside rack systems TX, allows vertical cable management independently of the enclosure frame.

## Features

|                               |                                                                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model No.                     | DK 7888.322                                                                                                                                                                |
| Product description           | For vertical cable routing and strain relief.                                                                                                                              |
| Material                      | Sheet steel                                                                                                                                                                |
| Surface finish                | Spray-finished                                                                                                                                                             |
| Colour                        | RAL 9005                                                                                                                                                                   |
| Supply includes               | Assembly parts                                                                                                                                                             |
| To fit                        | Enclosure type: TX CableNet<br>Height: = 2,200 mm                                                                                                                          |
| Packs of                      | 1 pc(s).                                                                                                                                                                   |
| Net weight                    | 8 kg                                                                                                                                                                       |
| Gross weight                  | 10 kg                                                                                                                                                                      |
| PCF per pack (cradle-to-gate) | 38.1 kg CO2 eq (Cat B)                                                                                                                                                     |
| Note on PCF category          | Category B: PCF value (cradle-to-gate) based on the product weight, approximately calculated and self-declared                                                             |
| Customs tariff number         | 73269098                                                                                                                                                                   |
| ETIM 9                        | EC000322                                                                                                                                                                   |
| ECLASS 8.0                    | 27400604                                                                                                                                                                   |
| Product description           | Cable tray for TX CableNet, H: 2200 mm, W: 308 mm, for vertical cable routing and strain relief, integrated multi-function perforation for attachment using clip elements. |