


# Rittal – The System.

Faster – better – everywhere.

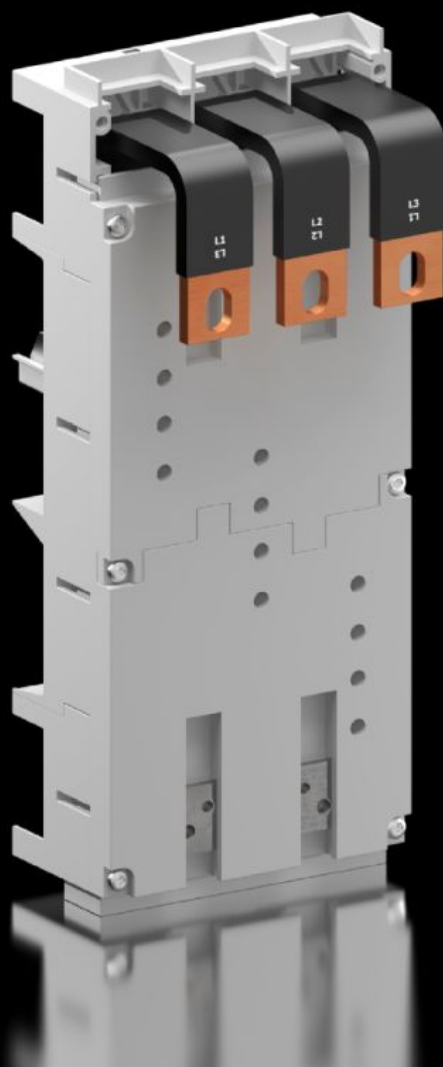

## SV 9345.730

# Circuit-Breaker Component Adaptors

State: 7/23/2026 (Source: [rittal.com/us-en](http://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# SV 9345.730 - Circuit-Breaker Component Adaptors 3-pole

Circuit breaker adaptor for the universal, simplified assembly of circuit-breakers.



## Features

|                                               |                                                                                                                          |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Model No.                                     | SV 9345.730                                                                                                              |
| Material                                      | Polyamide<br>Fire protection corresponding to UL 94-V0                                                                   |
| Color                                         | RAL 7035                                                                                                                 |
| Supply includes                               | Connection straps<br>Sliding Blocks                                                                                      |
| Rated current max.                            | 400 A                                                                                                                    |
| Rated operating voltage                       | 690 V, 3~                                                                                                                |
| Note                                          | Cable outlet: Switch outlet or as outgoing cable from the switchgear<br>The technical data may vary for UL applications. |
| Electrical UL ratings (SCCR)                  | 65 kA - 480 V, circuit breaker max. 400 A, DIVQ/7                                                                        |
| Cable outlet                                  | Bottom                                                                                                                   |
| For bar systems with center-to-center spacing | 60 mm                                                                                                                    |
| Number of poles                               | 3-pole                                                                                                                   |
| Dimensions                                    | Width: 140 mm<br>Height: 345 mm<br>Width: 5.51 "<br>Height: 13.6 "                                                       |

# Features

|                              |                                                                                                                                                                                                                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Suitable for busbars         | Height: 5, 10 mm<br>Height: 0.2, 0.39 "                                                                                                                                                                                          |
| To fit manufacturer (model)  | Eaton (NZM3, NZM3 UL/400 A)<br>GE (FG400)<br>Mitsubishi (NF400-SEW/HEW/REW)<br>Schneider Electric (NS(X)400, NSJ400)<br>Schrack (MC3)<br>Siemens (VL400, VL400X UL, VL400 UL, 3VA23, 3VA63)<br>Terasaki (E400, S400, H400, L400) |
| Approvals                    | UL                                                                                                                                                                                                                               |
| Packaging unit               | 1 pc(s).                                                                                                                                                                                                                         |
| Net weight                   | 2.831 kg                                                                                                                                                                                                                         |
| Gross weight                 | 2.963 kg                                                                                                                                                                                                                         |
| Copper weight (kg per piece) | 1.533                                                                                                                                                                                                                            |
| Customs tariff number        | 85369095                                                                                                                                                                                                                         |
| ETIM 9                       | EC001531                                                                                                                                                                                                                         |
| ECLASS 8.0                   | 27370304                                                                                                                                                                                                                         |
| Product description          | SV Circuit-breaker component adaptor, 400 A, 690 V, 3-pole, cable outlet bottom, with connection straps                                                                                                                          |

# Approvals

|              |                                                           |
|--------------|-----------------------------------------------------------|
| Approvals    | ABS<br>DNV<br>Lloyds Register<br>UL + C-UL (listed)       |
| Explanations | Declaration of conformity<br>Declaration of conformity UK |