



### PRODUCT DETAILS

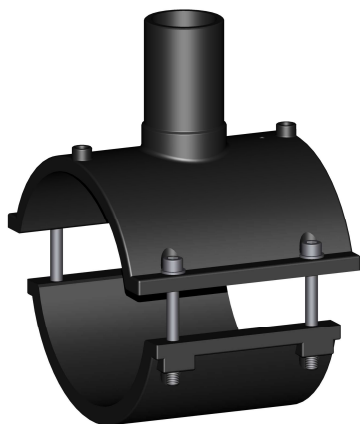

### DIMENSIONS AND WEIGHT

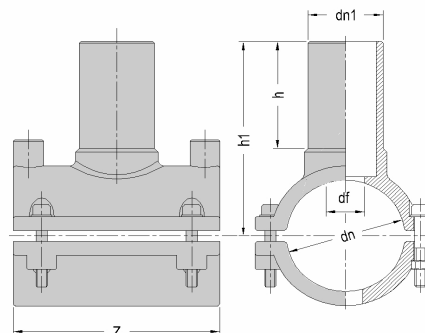

|                    |                   |
|--------------------|-------------------|
| ITEM               | <b>2120162063</b> |
| dn [mm]            | 200               |
| dn1 [mm]           | 63                |
| SDR                | 11                |
| PN                 | 16                |
| MATERIAL           | PE100             |
| TRADEMARK          | EURO              |
| MANUFACTURING TYPE | INJECTION MOULDED |
| USE                | WATER-GAS         |
| QUANTITY PER BOX   | 1                 |

NOTE:

|     |      |     |                        |
|-----|------|-----|------------------------|
| dn  | [mm] | 200 |                        |
| dn1 | [mm] | 63  |                        |
| h   | [mm] | 90  |                        |
| h1  | [mm] | 225 |                        |
| Z   | [mm] | 160 |                        |
| df  | [mm] | 48  |                        |
|     |      |     | <b>WEIGHT [g] 1890</b> |

Tolerance: +/- 5% excluding dn dn1

### MARKING AND LABEL on fitting



PE100 d200x63 SDR11 PN16

### STANDARDS AND APPROVALS

EN 12201  
 EN 1555  
 ISO 15494  
 DVGW  
 WRAS

### WELDING INFORMATION

|                    |      |                         |                                  |
|--------------------|------|-------------------------|----------------------------------|
| RESISTANCE [Ohm]   | 0,96 | Weldability barcode     | 05211815-200-8-20-096-6-225-74-4 |
| VOLTAGE [V]        | 20   |                         |                                  |
| FUSION TIME [sec]  | 225  | CIRCUIT TYPE            | SINGLE WIRE                      |
| COOLING TIME [min] | 20   | CONNECTOR DIAMETER [mm] | 4,0                              |

#### WELDABILITY on pipe/fitting :

|                |            |
|----------------|------------|
| <b>SDR 33</b>  | <b>NO</b>  |
| <b>SDR 26</b>  | <b>NO</b>  |
| <b>SDR 17</b>  | <b>YES</b> |
| <b>SDR 11</b>  | <b>YES</b> |
| <b>SDR 9</b>   | <b>NO</b>  |
| <b>SDR 7,4</b> | <b>NO</b>  |

### INFOS

- Moulded in PE 100
- Boring after cooling is completed
- ABSOLUTELY compulsory the pipe scraping in the welding area
- Use steel cutter suitable for the largest inside branch diameter

All dimensions are in millimeters and are intended as nominal and standard sizes: weights are in grams.  
 EUROSTANDARD reserves the right to change geometries and dimensions of any product.