

Twin Cord End Terminals – Insulated, WE

Description:

Twin cord end terminals with insulating polypropylene sleeve, heat-resistant up to 105 °C, for conductor cross sections 2 x 0.5 – 2 x 16 mm²

Tolerances after DIN 46228 part 4. The in feed cone is shaped "easy entry".

Standard colours:

Acc. WE colour code

Material:

Insulation sleeve: Polypropylene

Copper tube: E-Cu 57, tin-plated

Tin-plating: Pure tin, without lead (Pb)

Temperature rating:

Heat resistant up to 105 °C

Specifications:

DIN / VDE 46228 part. 4

Directive 2002/95/EC (RoHS)

Packing:

Loose pieces in small plastic bags

2x0,5 – 2x1,5 mm²: 5 x 100 pieces

2x2,5 mm² /N: 5 x 50 pieces

2 x 2,5 mm² /L: 100 pieces


2x4 – 2x10: 5 x 20 pieces

2 x 16 mm²: 50 pieces

Storage:

Cool and dry.

DIMENSIONS

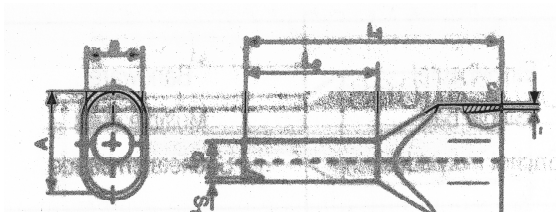

Item no 5703666-	TE Colour code	Size mm ² /L ₂	Type	AWG	Dimensions						
					mm						
					L ₁	L ₂	d ₁	S ₁	S ₂	A	B
205257	orange	2x0.50/8	N	2*20	14	8	1.4	0.15	0.3	5	3
205264	white	2x0.75/8	N	2x18	14	8	1.7	0.15	0.3	5.5	3
205271	white	2x0.75/10	HL	2x18	16	10	1.7	0.15	0.3	5.5	3
205288	yellow	2x1.0/8	N	2x18	15	8	2.0	0.15	0.3	5.8	3.2
205301	yellow	2x1.0/12	HL	2x18	19	12	2.0	0.15	0.3	5.8	3.2
205301	red	2x1.5/8	N	2x16	16	8	2.2	0.15	0.3	6.5	3.6
205318	red	2x1.5/12	HL	2x16	20	12	2.2	0.15	0.3	6.5	3.6
205325	blue	2x2.5/10	N	2x14	19	10	2.8	0.15	0.4	8	4.5
205332	blue	2x2.5/18	L	2x14	27	18	2.8	0.15	0.4	8	4.5
205349	grey	2x4/12	N	2x12	22	12	3.5	0.2	0.5	9	5.2
205356	black	2x6/12	N	2x10	23	12	4.5	0.2	0.5	11.4	6.2
205363	ivory	2x10/12	N	2x8	24	12	5.8	0.2	0.5	13.4	7.6
205370	green	2x16/16	N	2x6	29	16	8.3	0.3	0.6	17.2	9.5

Size designation/connection length: N = normal, HL = medium long, L = long

Notes:

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Brady makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose.

We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.